

GTFShift: A Data-Driven Tool for Prioritizing Bus Lane Implementation

Rosa Félix, Gonçalo Matos, Filipe Moura

May 16, 2025

Abstract

Identifying the streets with the highest density of bus frequency can help in planning and prioritizing the implementation of bus lanes. GTFShift R package uses the General Transit Feed Specification (GTFS) to perform this analysis, allowing for an aggregated overview of the transit density over a given territory.

Keywords: Bus lanes, GTFS, Network prioritization, Decision support tool, R package.

1 Questions

Bus lanes (or transit priority lanes) have the potential to improve the reliability of bus operations by limiting the negative impacts of traffic congestion (Cesme et al., 2018), reducing the variability of travel times (Surprenant-Legault & El-Geneidy, 2011), and increasing the average commercial speed – which can ultimately be used to increase service frequency (Basso et al., 2011). These benefits are amplified when there is a continuous bus lane network, with the greatest travel time savings at intersections (Truong et al., 2015). However, introducing them on road infrastructure affects other modes, such as private vehicles, which may experience a decrease in the level of service due to reduced allocated space (Arasan & Vedagiri, 2010), potentially jeopardizing public acceptance (Batty et al., 2014).

Common criteria for implementing bus lanes include:

- Frequency of buses (and trams) per hour and direction, at a peak hour;
- Number of lanes in the same direction;
- Existing traffic conditions;
- Existing bus lanes in the area (from a network continuity perspective).

For instance, NACTO suggests that dedicated bus lanes should be applied «on major routes with frequent headways (10 minutes at peak) or where traffic congestion may significantly affect reliability» (NACTO, 2016). Nevertheless, the decision should be based on a more detailed analysis of the network, including the existing traffic conditions, the number of bus stops, and the demand for public transport in the area.

Vuchic (1981) defends that bus lanes should be implemented based on the number of lanes, vehicle volume per lane, and bus frequency per hour. For instance, the minimum bus frequency for a street with 2 lanes in the same direction and 400 veh/h/lane is considered to be 12 bus/h to justify its implementation, according to the author.

This paper focuses on identifying hourly bus frequency for each road segment, using General Transit Feed Specification (GTFS) data, which is widely available from many transit agencies. Identifying high-frequency corridors is essential for prioritizing and supporting new bus lane implementation.

For this, we present **GTFShift**, an open-source R package to identifying bus lane priorities (Matos & Félix, 2025). It extends the functionality of other R libraries that deal with this transit standard, such as **tidytransit** (Poletti et al., 2025) and **gtfstools** (Herszenhut et al., 2025).

This tool helps prioritize bus lanes in a given territory to improve transit efficiency.

2 Methods

GTFSShift is an open-source R package that provides methods for the entire workflow of bus network frequency analysis. It can be used to get GTFS data for a given territory, and estimate the aggregated bus frequency per street segment at each hour of a given day.

- `unify()`: Merges multiple GTFS feeds into a single entity, enabling an aggregated analysis. This method is relevant, for instance, when considering more than one bus operator in the same territory. It extends the functionality of `gtfstools::merge_gtfs()` by enabling the identification of additional transfers.
- `get_route_frequency_hourly()`: Calculates the hourly frequency of bus routes for a given day, considering its geometries. By default, it estimates the next business Wednesday, relevant for the peak hour. The `overline` parameter aggregates all the bus routes that share common line segments, providing a sum of frequencies per street segment, using `stplanr::overline2()` (Lovelace & Ellison, 2018). Optionally, using `use_osm_routes` parameter, it retrieves the geometries from *OpenStreetMap* (OSM) by matching the tag `gtfs:shape_id`, overwriting the original GTFS `shapes.txt`.

The parameter `use_osm_routes` is particularly useful if the GTFS shapes do not share the same geometry. For instance, if the edges of the lines do not overlap or do not follow the same route-over-the-road – which is very common, even besides [GTFS recommendation](#) – geometries might not be aggregated correctly, causing inconsistent results. By relying on a common road network, such as OSM, it is possible to overcome this issue and aggregate the bus routes correctly. Nevertheless, the `gtfs:shape_id` OSM tag is only present in 3.5% of the mapped bus networks. Alternatively, the `osm_shapes_match_routes()` method can be used to match GTFS shapes with OSM networks, considering their geometrical resemblance.

The case study is Lisbon, Portugal, where the bus network is operated by *Carris* and *Carris Metropolitana*, respectively, the urban and sub-urban bus operators in the area.

For this article, we used GTFSShift version v0.6 and R version v4.5. To reproduce the results presented in this paper, refer to [U-Shift/busclar](#) code repository.

3 Findings

We load the R libraries, the static GTFS feeds for both bus agencies, and unify them.

```
library(GTFSShift)

# load GTFS feeds
gtfs_carris = load_feed("https://gateway.carris.pt/gateway/gtfs/api/v2.8/GTFS") # 114 MB
gtfs_carrismetro = load_feed("https://api.carrismetropolitana.pt/gtfs") # 638 MB

# unify the feeds in a single GTFS feed
gtfs_lisbon = unify(gtfs_carris, gtfs_carrismetro, create_transfers = FALSE)
```

Next, the hourly bus frequency is estimated for each route, for the next business Wednesday, and the geometries are overlined, considering the correspondent OSM routes.

```
# OSM query for bus networks in Lisbon
library(osmdata)
query = opq("Lisbon") |>
  add_osm_feature(key = "route",
                  value = "bus") |>
  add_osm_feature(key = "network",
                  value = c("Carris", "Carris Metropolitana")) # operators
```

```
# get hourly frequency by shape
frequencies_segment = get_route_frequency_hourly(gtfs = gtfs_lisbon,
                                                  overline = TRUE,
                                                  use_osm_routes = query)
```

The results, presented in Figure 1, allow for the identification of the street segments with higher bus transit frequency, at morning peak hour.

```
# filter for the peak hour 8-9am
frequencies_segment_8 = frequencies_segment |>
  dplyr::filter(hour == 8) # the hour with the highest frequency

mapview::mapview(
  frequencies_segment_8,
  zcol = "frequency",
  lwd = "frequency",
  layer.name = "Bus frequency"
)
```

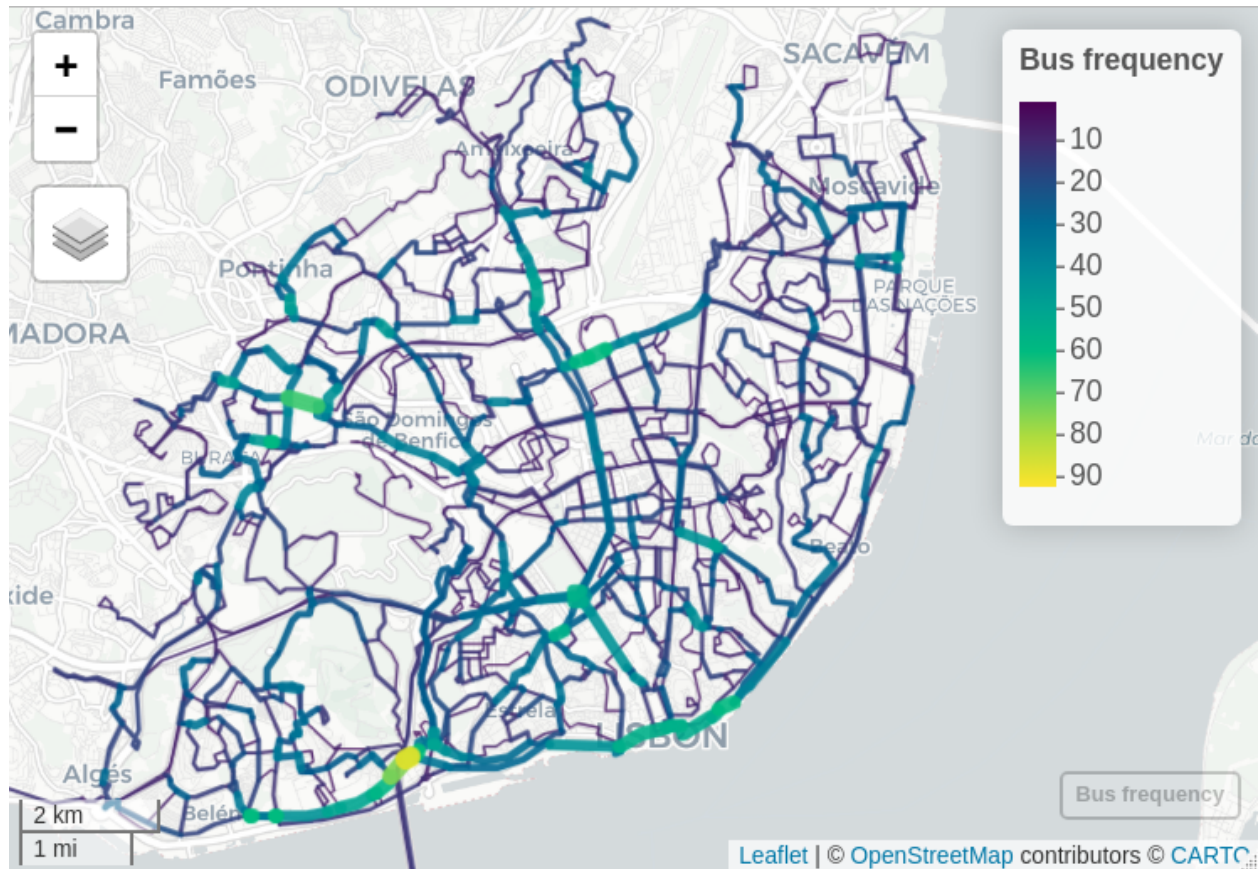


Fig. 1. Road segments with higher bus frequency, in Lisbon, at 8 am. The larger and yellowish lines represent the streets with higher hourly bus frequency. Carto basemap.

Based on the resulting information, we can compare the data with existing bus lanes and identify high-frequency segments lacking dedicated infrastructure, which should be prioritized. Note that for two-way segments, frequency is aggregated and should be divided by two.

Filtering the road network segments using other available OSM data, such as the number of lanes in the same direction (two or more), can further support decisions on implementing bus corridors. However, policies may also favour bus lanes on single-lane streets, for example, to create transit-priority streets. Bus lanes for emergency vehicle access, such as near hospitals, can also be considered.

Further enhancements of the method may include passenger capacity per hour instead of just frequency. For instance, routes with articulated buses (over 80 passengers) would be weighted more heavily than neighbourhood minibuses (up to 25 passengers).

This method supports not only static bus lanes but also dynamic bus lanes, by analyzing hourly frequency – providing evidence for decision on which hours to allocate road lanes for bus.

The presented replicable approach offers a feasible methodology to generate evidence for decision-making on the implementation or expansion of bus lane networks. Required data is commonly available for most cities, as GTFS feeds are widely used by public transport agencies.

We acknowledge that this evidence alone may not be sufficient to justify bus lane implementation, as it does not account for other factors such traffic conditions, roadway capacity, or public acceptance.

Acknowledgements

The authors acknowledge Francisco Costa for valuable discussion on the further developments.

The authors gratefully acknowledges the support for this research by the Portuguese Foundation for Science and Technology (FCT) funding [PTDC/ECI-TRA/3120/2021](#) from STREETS4ALL Project. R Félix and F Moura are grateful for the FCT support through funding UIDB/04625/2025 from the research unit CERIS.

References

- Arasan, V. T., & Vedagiri, P. (2010, 5). Study of the impact of exclusive bus lane under highly heterogeneous traffic condition. *Public Transport*, 2(1-2), 135–155. doi: 10.1007/s12469-010-0021-x
- Basso, L. J., Guevara, C. A., Gschwender, A., & Fuster, M. (2011, 2). Congestion pricing, transit subsidies and dedicated bus lanes: Efficient and practical solutions to congestion. *Transport Policy*, 18(5), 676–684. doi: 10.1016/j.tranpol.2011.01.002
- Batty, P., Palacin, R., & González-Gil, A. (2014, 12). Challenges and opportunities in developing urban modal shift. *Travel Behaviour and Society*, 2(2), 109–123. doi: 10.1016/j.tbs.2014.12.001
- Cesme, B., Roisman, R., Burns, R., List, K., Koudounas, A., Cuellar, J., ... Miller, D. (2018, 12). Strategies and barriers in effective bus lane implementation and management: Best practices for use in the greater washington, d.c. region. *Transportation Research Record: Journal of the Transportation Research Board*, 2672(8), 29–40. doi: 10.1177/0361198118791914
- Herszenhut, D., Pereira, R. H. M., Andrade, P. R., & Bazzo, J. (2025). gtfstools: General transit feed specification (GTFS) editing and analysing tools [Computer software manual]. Retrieved from <https://ipeagit.github.io/gtfstools/> (R package version 1.4.0, <https://github.com/ipeaGIT/gtfstools>)
- Lovelace, R., & Ellison, R. (2018). stplanr: A package for transport planning. *The R Journal*, 10(2), 10. doi: 10.32614/RJ-2018-053
- Matos, G., & Félix, R. (2025). GTFShift: Explore and analyse general transit feed specification (GTFS) files with a focus on urban mobility [Computer software manual]. Retrieved from <https://github.com/U-Shift/GTFShift> (R package version 0.6.0)
- NACTO. (2016). *Transit Street Design Guide*. Island Press.
- Poletti, F., Herszenhut, D., Padgham, M., Buckley, T., & Noriega-Goodwin, D. (2025). tidytransit: Read, validate, analyze, and map gtfs feeds [Computer software manual]. Retrieved from <https://github.com/r-transit/tidytransit> (R package version 1.7.0)

- Surprenant-Legault, J., & El-Geneidy, A. M. (2011, 1). Introduction of reserved bus lane. *Transportation Research Record Journal of the Transportation Research Board*, 2218(1), 10–18. doi: 10.3141/2218-02
- Truong, L. T., Sarvi, M., & Currie, G. (2015, 1). Exploring multiplier effects generated by bus lane combinations. *Transportation Research Record Journal of the Transportation Research Board*, 2533(1), 68–77. doi: 10.3141/2533-08
- Vuchic, V. R. (1981). *Urban Public Transportation - Systems and Technology*. Prentice-Hall, Inc.