
PCB Relay G6RL

Low-profile power relay with maximum switching of 10 A

- Low profile: 12.3 mm in height
- Max. switching capacity: 2,500 VA (NO)
- IEC 60947-5-1, AC-15, DC13
- Clearance and creepage distance: 10 mm.
- Models with high shock resistance (250 m/s²) are available.
- \bullet Models for P1 load (2 \times 200 W lamps parallel to ignition transformer) are available.
- RoHS Compliant

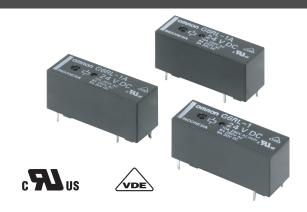

Applications:

Boilers, PLCs, I/O ports, timers, and temperature controllers

Ordering Information

Classification	Englesure reting	Contact form	Con	tact material
Classification	Enclosure rating	Contact form	AgSnIn	AgNi
Standard	Flux protection	SPST-NO	G6RL-1A-ASI	G6RL-1A
		SPDT	G6RL-1-ASI	G6RL-1
	Fully sealed	SPST-NO	G6RL-1A4-ASI	
		SPDT	G6RL-14-ASI	
P1 Load	Flux protection	SPST-NO	G6RL-1A-ASI-PL	
		SPDT	G6RL-1-ASI-PL	
Shock resistance	Flux protection	SPST-NO		
		SPDT	G6RL-1-SR-ASI	
	Fully sealed	SPST-NO		
		SPDT	G6RL-14-SR-ASI	

Note: When ordering, add the rated coil voltage to the model number.

Examples: G6RL-1A DC12

Rated coil voltage

■ Model Number Legend:



1. Number of Poles

1: 1 pole

2. Contact Form/Contact Construction

None: SPDT A: SPST-NO 3. Enclosure Rating

None: Flux protection

4: Fully sealed
4. Special Function 1

SR: Shock resistance of 25G

5. Contact material

None: AgNi ASI: AgSnIn

6. Special Function 2

PL: P1 load (See note.)

7. Rated Coil Voltage

3, 5, 6, 12, 24, or 48

Note: Please refer to *Endurance Under Real Load* table in this datasheet.

Specifications

■ Coil Ratings

Classification	Standard, P1 load					Sh	ock resist	ance			
Rated voltage	3 VDC	5 VDC	6 VDC	12 VDC	24 VDC	48 VDC	3 VDC	5 VDC	6 VDC	12 VDC	24 VDC
Rated current	73.3 mA	44 mA	36.7 mA	18.3 mA	9.2 mA	5 mA	101 mA	60.2 mA	50.1 mA	25.2 mA	12.6 mA
Coil resistance	40 Ω	113 Ω	163 Ω	654 Ω	2,618 Ω	9,600 Ω	30 Ω	83 Ω	120 Ω	476 Ω	1,912 Ω
Must operate voltage	70% max.	70% max. of rated voltage				80% max. of rated voltage					
Must release voltage	10% min.	10% min. of rated voltage					10% min. of rated voltage				
Max. voltage	150% of r	150% of rated voltage			150% of rated voltage (23°C)						
Power consumption	Approx. 2	Approx. 220 mW Approx. 240 mW			Approx. 3	00 mW					

Note: 1. The above items are measured at a coil temperature of 23°C.

■ Contact Ratings

Load	Resistive load (cos φ = 1)
Rated load (See note 1.)	10 A at 250 VAC, NO resistive load 8 A at 250 VAC, resistive load 5 A at 30 VDC, resistive load
Rated carry current	10 A at 250 VAC 5 A at 30 VDC
Max. switching voltage	400 VAC, 300 VDC
Max. switching current	NO: 10 A, NC: 8 A
Max. switching power	NO: 2,500 VA, NC: 2,000 VA 150 W
Failure rate (reference value)	10 mA at 5 VDC (P level) (See note 2.)

Note: 1. G6RL-1(A), G6RL-1(A)4-ASI: 8 A 250 VAC, resistive load; 5 A 24 VDC resistive load.

■ Characteristics

Contact resistance	100 mΩ max.			
Operate time	0 ms max. (SR Models: 15 ms max.)			
Release time	5 ms max.			
Insulation resistance	1,000 MΩ min. (at 500 VDC)			
Dielectric strength	5,000 VAC, 50/60 Hz for 1 min between coil and contacts			
	1,000 VAC, 50/60 Hz for 1 min between contacts of same polarity			
Impulse withstand voltage	10 kV between coil and contacts (1.2 \times 50 μ s)			
Vibration resistance	Destruction: 10 to 55 to 10 Hz, 1.5-mm double amplitude Malfunction: 10 to 55 to 10 Hz, 0.825-mm single amplitude (1.65-mm double amplitude) when energized. 10 to 55 to 10 Hz, 0.4-mm single amplitude (0.8-mm double amplitude) when not energized.			
Shock resistance	Destruction: 1,000 m/s ² Malfunction: NO: 200 m/s ² , NC: 50 m/s ² when not energized SR Models: 250 m/s ² (NO and NC) when not energized			
Endurance	Mechanical: 10,000,000 operations min. (at 18,000 operations/hr)			
Ambient temperature	Operating: -40°C to 85°C (with no icing)			
Ambient humidity	Operating: 5% to 85%			
Weight	Approx. 7.8 g			

^{2.} The tolerance of the rated current is $\pm 10\%$.

^{2.} P level: $\lambda_{60} = 0.1 \times 10^{-6}$ / operations

■ Other Data

Construction of protection	Flux protection	Fully sealed		
Insulation material group	Illa			
Rated insulation voltage	250 V			
Pollution degree	3	2		
Rated voltage system	250 V	400 V		
Overvoltage category	III			
Creepage distance	10 mm			
Clearance distance	10 mm			
RoHS	Compliant			
Tracking index of relay base	PTI 250			
Flammability class according to UL94	V-0			
Flammability-flame GWFI (IEC 60695-2-12)	850°C			
GWIT (IEC 60695-2-13)	750°C			
Ball pressure test (IEC 60695-10-2)	170°C			

■ Approved Standards

UL Recognized (File No. E41643) - - Ambient Temp. = 85°C

Models	Contact form	Coil rating	Contact rating		
G6RL-1A	SPST-NO	3 to 48 VDC	`	6,000 operations	
G6RL-1	SPDT]	8 A at 250 VAC (Resistive) 5 A at 30 VDC (Resistive)		
G6RL-1A(4)-ASI	SPST-NO				
G6RL-1(4)-ASI	SPDT				
G6RL-1(4)-SR-ASI	SPDT	3 to 24 VDC			

VDE (EN61810-1) (Certificate No.C266)

Models	Contact form	Coil rating	Contact rating	Model
G6RL-1A-(ASI)	SPST-NO	3, 5, 6, 12, 24, or 48 VDC	10 A at 250 VAC (NO)	10,000 operations at 85°C
G6RL-1-(ASI)	SPDT		8 A at 250 VAC	30,000 operations at 85°C
			5 A at 30 VDC	50,000 operations at 85°C
G6RL-1A4-ASI (See note.)	SPST-NO	3, 5, 6, 12, 24, or 48 VDC	10 A at 250 VAC (NO)	10,000 operations at 85°C
G6RL-14-ASI (See note.)	SPDT		8 A at 250 VAC	10,000 operations at 85°C
			5 A at 30 VDC	10,000 operations at 85°C
G6RL-1(4)-SR-ASI	SPDT	3, 5, 6, 12 or 24 VDC	10 A at 250 VAC (NO)	10,000 operations at 85°C
			8 A at 250 VAC	10,000 operations at 85°C
			5 A at 30 VDC	10,000 operations at 85°C

Note: In progress

VDE (60947-5-1) (Certificate No. C266)

Models G6RL-1(A)	Contact rating						
	Ut	tilization category	Rated voltage (V)	Operations			
	AC15 (NO)	le: 3 A, Ithe: 10 A (A300)	AC240	6,000			
	AC15 (NO)	le: 3 A, Ithe: 5 A (B300)	AC120	6,000			
	AC15 (NO)	le: 1.5 A, Ithe: 5 A (B300)	AC240	6,000			
	DC13	le: 0.22A, Ithe: 1A (R150)	DC125	6,000			
	DC13 (See note.)	le: 0.1 A, Ithe: 1 A (R300)	DC250	6,000			
G6RL-1(A)-ASI	AC15	le: 3 A, Ithe: 10 A (A300)	AC240	6,000			
G6RL-1(A)4-ASI (See note.)	AC15	le: 3 A, Ithe: 5 A (B300)	AC120	6,000			
G6RL-1(4)-SR-ASI	AC15	le: 1.5 A, Ithe: 5 A (B300)	AC240	6,000			
	DC13	le: 0.22 A, Ithe: 1 A (R150)	DC125	6,000			
	DC13 (See note.)	le: 0.1 A, Ithe: 1 A (R300)	DC250	6,000			

Note: 1. In progress

2. All ratings are valid at Room Temperature

VDE (60947-4-1) (Certificate No. C266)

Models		Contact rating					
Wiodels		Utilization category	Rated voltage (V)	Operations			
G6RL-1(A)	AC1	8 A	AC250	6,000			
G6RL-1(A)-ASI (See note.)	AC3	2 A	AC250	6,000			
	DC1	5 A	DC24	6,000			
	DC3	2 A	DC24	6,000			

Note: 1. In progress

2. All ratings are valid at Room Temperature

VDE (EN60730-1) (Certificate No. C266)

Models	Contact rating						
		Utilization category	Rated voltage (V)	Operations			
G6RL-1(A)	2 (2) A	65°C	AC250	100,000			
	8 (4) A (NO)	85°C	AC250	100,000			
	6 (4) A (NO)	85°C (See note.)	AC250	100,000			
	6 (4)A (NO)	65°C	AC250	100,000			
	6 (4) A (NC)	65°C	AC250	100,000			
G6RL-1(A)-ASI (See note.)	2 (2) A	65°C	AC250	100,000			
	8 (4) A (NO)	85°C	AC250	100,000			
	6 (4) A (NO)	85°C	AC250	100,000			
	6 (4) A (NC)	65°C	AC250	100,000			

Note: In progress

Electrical Endurance Data

G6RL-1(A)	8 A at 250 VAC (cosφ = 1) NO	50,000 operations min.
	8 A at 250 VAC (cosφ = 1) NC	50,000 operations min.
	5 A at 24 VDC	50,000 operations min.
G6RL-1(A)-(SR)-ASI-(PL)	10 A at 250 VAC (cosφ = 1) NO	100,000 operations min.
	8 A at 250 VAC (cosφ = 1)	100,000 operations min.
	5 A at 30 VDC	50,000 operations min.
G6RL-1(A)4-ASI	8 A at 250 VAC (cosφ = 1) NO	50,000 operations min.
	8 A at 250 VAC (cosφ = 1) NC	50,000 operations min.
	5 A at 24 VDC	50,000 operations min.
G6RL-14-SR-ASI	8 A at 250 VAC (cosφ = 1) NO	50,000 operations min.
	3 A at 250 VAC (cosφ = 1) NC	100,000 operations min.
	5 A at 24 VDC NO	50,000 operations min.
	5 A at 24 VDC NC	30,000 operations min.

Endurance Under Real Load (Reference Only)

G6RL-1(A)-ASI-PL


Rated voltage	Condition	Frequency	Electrical life
230 VAC	P1 load (2 × 200 W lamps parallel to ignition transformer)	1.5 s ON/4.5 s OFF	250,000 operations

Note: The results shown reflect values measured using very severe test conditions, i.e., Duty: 1 s ON/OFF.


Electrical endurance will vary depending on the test conditions. Contact your OMRON representative if you require more detailed information for the electrical endurance under your test conditions.

Engineering Data


G6RL-1(A)(4)-(SR)-(ASI)-(PL) Maximum Switching Capacity




G6RL-1(A)(4)-(SR)-(ASI)-(PL) Ambient Temperature vs. Maximum Coil Voltage



G6RL-1(A)




G6RL-1(A)(4)-(ASI)-(PL) Ambient Temperature vs. Must Operate or Must Release Voltage




Note: The "maximum coil voltage" refers to the maximum value in a varying range of operating voltage, not a continuous voltage.

Dimensions

Note: All units are in millimeters unless otherwise indicated.

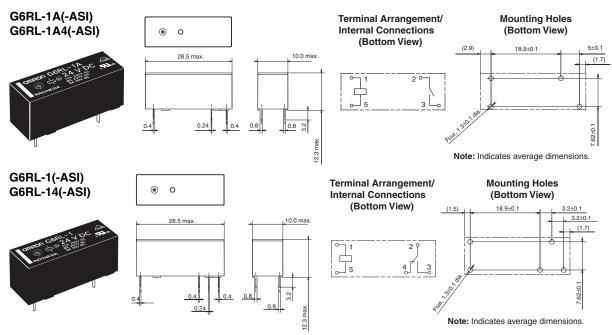

OMRON

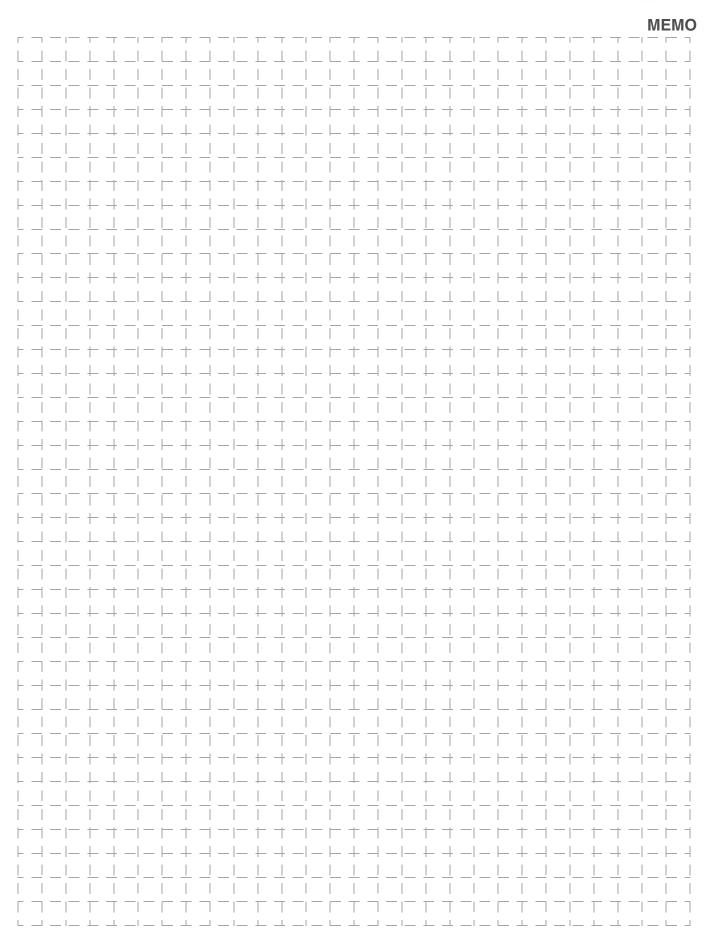



All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON

OMRON ELECTRONIC COMPONENTS LLC 55 E. Commerce Drive, Suite B Schaumburg, IL 60173

847-882-2288

Cat. No. X301-E-1b

09/11

OMRON ON-LINE

Global - http://www.omron.com USA - http://www.components.omron.com

Specifications subject to change without notice Printed in USA