

Smooth Distances for Constrained Second Order Kinematic Control (Supplementary Material)

Vinicius Mariano Gonçalves, Anthony Tzes, Farshad Khorrami and Philippe Fraisse

I. INTRODUCTION

This is a supplementary material for the paper “Smooth Distances for Constrained Second Order Kinematic Control”, explaining some practical aspects of the implementation and how to compute $D_h^A(p)$ for some 3D objects. Through this document, we will use $p = [x \ y \ z]^T$.

II. DISTANCE COMPUTATION FOR SOME SPECIAL SETS

A. Computing projections numerically

In this document, we will show how to compute $D_h^A(p)$ for some sets. However, we will also need to compute the h -projections $\Pi_h^A(p)$. In that case, we note that $\Pi^A(p) = p - \frac{\partial D_h^A}{\partial p}(p)$. We suggest to compute $\frac{\partial D_h^A}{\partial p}(p)$ numerically, that is:

$$\begin{aligned} \frac{\partial D_h^A}{\partial x}(p) &\approx \frac{D_h^A(p + \epsilon e_x) - D_h^A(p - \epsilon e_x)}{2\epsilon} \\ \frac{\partial D_h^A}{\partial y}(p) &\approx \frac{D_h^A(p + \epsilon e_y) - D_h^A(p - \epsilon e_y)}{2\epsilon} \\ \frac{\partial D_h^A}{\partial z}(p) &\approx \frac{D_h^A(p + \epsilon e_z) - D_h^A(p - \epsilon e_z)}{2\epsilon} \end{aligned} \quad (1)$$

in which $e_x = [1 \ 0 \ 0]^T$, $e_y = [0 \ 1 \ 0]^T$, $e_z = [0 \ 0 \ 1]^T$ and ϵ is a small number (we suggest $\epsilon = 0.001$).

B. Canonical objects

In this document, we will show how to compute $D_h^A(p)$ (and thus $\Pi_h^A(p)$, see the previous subsection) for some sets in a *canonical* pose. For example, for a box centered at $p = [0 \ 0 \ 0]^T$ of a reference frame with its sides aligned with the axis of this reference frame. For these objects in a general pose, other than the canonical one, we use the property derived in the paper: if $E(\cdot)$ is a rigid transformation and $E^{-1}(\cdot)$ is its inverse:

$$\begin{aligned} D_h^{E(A)}(p) &= D_h^A(E^{-1}(p)) \\ \Pi_h^{E(A)}(p) &= E\left(\Pi_h^A(E^{-1}(p))\right). \end{aligned} \quad (2)$$

C. The Cartesian Product Property

Using the definition of \mathcal{A} , it is easy to see that if \mathcal{A}_i are subsets of \mathbb{R}^{n_i} for a $n_i \geq 1$, $\mathcal{A} = \mathcal{A}_1 \times \mathcal{A}_2 \times \dots \times \mathcal{A}_m$, $p^i \in \mathbb{R}^{n_i}$ and $p = [(p^1)^T \ (p^2)^T \ \dots \ (p^m)^T]^T$ then:

$$D_h^A(p) = \sum_{i=1}^m D_h^{A_i}(p^i). \quad (3)$$

We can use this to compute the h -distance function for complex sets that are build as Cartesian product of simpler sets.

D. The Error Function

The *Error Function* $\text{Erf}(u) \triangleq \frac{2}{\sqrt{\pi}} \int_0^u e^{-t^2} dt$ appears often in the calculations of $D^{\mathcal{A}}(p)$ for some simple objects. It has no closed form in terms of a finite number elementary functions, but there are very good approximation for it in terms of elementary functions that will be used here. Let

$$J(u) \triangleq \frac{a}{(a-1)\sqrt{\pi u^2} + \sqrt{\pi u^2 + a^2}}. \quad (4)$$

in which $a = 2.7889$. Then, $\text{Erf}(u) \approx \text{sign}(u)(1 - e^{-u^2} J(u))$. This approximation is excellent for all values of u . More details can be seen in [1].

A related function that will often appear in our calculations is, for $L \geq 0$ and $v \in \mathbb{R}$:

$$\begin{aligned} \text{Int}_h(v, L) &\triangleq -h^2 \log \left(\frac{1}{2L} \int_{-L}^L e^{-\frac{(u-v)^2}{2h^2}} du \right) = \\ &-h^2 \log \left(\sqrt{\frac{\pi}{2}} \frac{h}{2L} \left(\text{Erf} \left(\frac{L+v}{\sqrt{2}h} \right) + \text{Erf} \left(\frac{L-v}{\sqrt{2}h} \right) \right) \right). \end{aligned} \quad (5)$$

Int stands for *interval* as it is $D_h^{\mathcal{A}}(p)$ for $\mathcal{A} = [-L, L]$, in which $p \in \mathbb{R}$.

Without a careful evaluation, this function can easily be problematic to be computed. When $|v| \geq 5\sqrt{2}h + L$ the sum of Erf 's inside the log is already very close to 0 in most naive implementations of the error function, generating $+\infty$ as a result. The approximation $\text{Erf}(v) \approx \text{sign}(v)(1 - e^{-v^2} J(v))$ allow us to solve this problem. We will consider two cases, $|v| \leq L$, in which the aforementioned problem do not happen, and when $|v| \geq L$, in which we need to rewrite the function to avoid underflows.

For $|v| \leq L$, both $u = (L+v)/(\sqrt{2}h)$ and $u = (L-v)/(\sqrt{2}h)$ are nonnegative and we can simply use $\text{Erf}(u) \approx 1 - e^{-u^2} J(u)$. Then we have the following approximation for $\text{Int}_h(v, L)$:

$$\begin{aligned} \text{Int}_h(v, L) &\approx -h^2 \log \left(\sqrt{\frac{\pi}{2}} \frac{h}{2L} \left(2 - e^{-\frac{(L+v)^2}{2h^2}} J \left(\frac{v+L}{\sqrt{2}h} \right) - e^{-\frac{(L-v)^2}{2h^2}} J \left(\frac{v-L}{\sqrt{2}h} \right) \right) \right) \\ &\text{for } |v| \leq L. \end{aligned} \quad (6)$$

For $|v| \geq L$, we note that we can assume, without loss of generality, that $v \geq 0$, since $\text{Int}_h(v, L)$ is an even function of v . Note than, in this case, $u_1 = (L+v)/(\sqrt{2}h) \geq 0$ and $u_2 = (L-v)/(\sqrt{2}h) \leq 0$. Using the approximations $\text{Erf}(u_1) \approx (1 - e^{-u_1^2} J(u_1))$, $\text{Erf}(u_2) \approx -(1 - e^{-u_2^2} J(u_2))$, and factoring out the term $-e^{-\frac{(L-v)^2}{2h^2}}$ out of the log, we can write:

$$\begin{aligned} \text{Int}_h(v, L) &\approx \frac{(v-L)^2}{2} - h^2 \log \left(\sqrt{\frac{\pi}{2}} \frac{h}{2L} \left(J \left(\frac{v-L}{\sqrt{2}h} \right) - J \left(\frac{v+L}{\sqrt{2}h} \right) e^{-\frac{2Lv}{h^2}} \right) \right) \\ &\text{for } v \geq L. \text{ If } v \leq -L, \text{ use } -v \text{ in the formula instead.} \end{aligned} \quad (7)$$

Here is the C code:

```
#include <math.h>

#define PI 3.1415926
#define SQRTALFPI 1.2533141
#define SQRT2 1.4142135
#define CONSTJA 2.7889

double fun_J(double u)
{
    return CONSTJA/((CONSTJA-1)*sqrt(PI*u*u) + sqrt(PI*u*u+CONSTJA*CONSTJA));
}

double Int(double v, double h, double L)
{
    if ( abs(v) <= L)
    {
        double A1 = exp(-(L-v)*(L-v)/(2*h*h))*fun_J((v-L)/(SQRT2*h));
        double A2 = exp(-(L+v)*(L+v)/(2*h*h))*fun_J((v+L)/(SQRT2*h));
        return -h*h*log(SQRTALFPI*(h/(2*L))*(2-A1-A2));
    }
    else
```

```

{
  //The function is even
  v = abs(v);

  double A1 = fun_J((v-L)/(SQRT2*h));
  double A2 = exp(-2*L*v/(h*h))*fun_J((v+L)/(SQRT2*h));
  return 0.5*(v-L)*(v-L) - h*h*log(SQRT2*PI*(h/(2*L))*(A1-A2));
}

```

E. The Modified Bessel Function of the First Kind

Another function that will often appear is the *Modified Bessel Function of the First Kind* of order 0, defined as $I_0(u) \triangleq \frac{1}{2\pi} \int_0^{2\pi} e^{u \cos(\theta)} d\theta$.

Let $\hat{I}_0(u) = \cosh(u)^{-1} I_0(u)$. Then we define, for $R \geq 0$ and $v \in \mathbb{R}^+$, the following function that will appear in our calculations:

$$\text{Cir}_h(v, R) \triangleq -h^2 \log \left(\frac{1}{R^2} \int_0^R r \left(e^{-\frac{(r-v)^2}{2h^2}} + e^{-\frac{(r+v)^2}{2h^2}} \right) \hat{I}_0 \left(\frac{rv}{h^2} \right) dr \right). \quad (8)$$

Cir stands for *circular* as it is related $D_h^{\mathcal{A}}(p)$ when \mathcal{A} is a circle (with interior) in \mathbb{R}^2 , centered at the origin and with radius R . More precisely, since the distance function in this case will be radially symmetric, $D_h^{\mathcal{A}}(p) = \text{Cir}_h(\|p\|, R)$.

It is beneficial to study an scaled version of this function, in which v, r and R are scaled by $1/h$. Making the change of variables $\rho = r/h$ in the integral and considering $\nu = v/h$, $P = R/h$ we obtain that

$$\text{Cir}_h(h\nu, hP) = -h^2 \log \left(\frac{1}{P^2} \int_0^P \rho \left(e^{-\frac{1}{2}(\rho-\nu)^2} + e^{-\frac{1}{2}(\rho+\nu)^2} \right) \hat{I}_0(\rho\nu) d\rho \right). \quad (9)$$

Now, if we graph the function $f(\rho, \nu) \triangleq \rho \left(e^{-\frac{1}{2}(\rho-\nu)^2} + e^{-\frac{1}{2}(\rho+\nu)^2} \right) \hat{I}_0(\rho\nu)$ on ρ for fixed values of ν ($\nu \geq 0$), we will see that the maximum of $f(\rho, \nu)$ is approximately at $r^*(\nu) = \sqrt{1+\nu^2}$, and it is practically zero for $r \leq r^*(\nu) - 3$ and $r \geq r^*(\nu) + 3$. Therefore, let $\underline{F}(\nu, P) \triangleq \max(0, r^*(\nu) - 3)$ and $\overline{F}(\nu, P) \triangleq \min(P, r^*(\nu) + 3)$

$$\int_0^{R/h} f(\rho, \nu) d\rho \approx \int_{\underline{F}(\nu, P)}^{\overline{F}(\nu, P)} f(\rho, \nu) d\rho. \quad (10)$$

We can integrate the integral at the right numerically, for example, Gaussian quadrature. For that, let $\rho = \frac{\underline{F}(\nu, P) + \overline{F}(\nu, P)}{2}(g+1)$. Then the integral becomes:

$$\int_0^{R/h} f(\rho, \nu) d\rho \approx \left(\frac{\overline{F} - \underline{F}}{2} \right) \int_{-1}^1 f \left(\frac{\underline{F} + \overline{F}}{2}(g+1), \nu \right) dg. \quad (11)$$

and thus Gauss-Legendre quadrature can be applied. This integral only make sense if $\overline{F}(\nu, P) \geq \underline{F}(\nu, P)$. This holds if $\nu \leq P$, which, returning to the original variables, implies $v \leq R$.

If $v \geq R$, we will integrate in the whole interval from 0 to $P = R/h$ in the Gauss Legendre quadrature rule. However, we need to be careful to avoid underflows.

Let $g_i \in [-1, 1]$ be the N points in the Gauss-Legendre quadrature, in an increasing order, with associated weights w_i . Thus, $g_N \leq 1$ is the greatest of the weights and the mapped point in the interval 0 to $P = R/h$ is $\tilde{\rho} \triangleq 0 + 0.5(R/h - 0)(g_N + 1) = 0.5(R/h)(g_N + 1)$. Define the function

$$\hat{f}(\rho, \nu, \tilde{\rho}) \triangleq e^{\frac{1}{2}(\tilde{\rho}-\nu)^2} f(\rho, \nu) = \rho \left(e^{-\frac{1}{2}(\rho-\nu)^2 + \frac{1}{2}(\tilde{\rho}-\nu)^2} + e^{-\frac{1}{2}(\rho+\nu)^2 + \frac{1}{2}(\tilde{\rho}-\nu)^2} \right) \hat{I}_0(\rho\nu). \quad (12)$$

Thus, for $v \geq R$, we compute

$$\text{Cir}_h(v, R) = \frac{(v - h\tilde{\rho})^2}{2} - h^2 \log \left(\frac{h^2}{R^2} \int_0^{R/h} \hat{f}(\rho, v/h, \tilde{\rho}) d\rho \right) \quad (13)$$

in which the integral inside is approximated using Gauss-Legendre quadrature in the interval $[0, R/h]$.

Note that we need to compute the values of the Bessel Function. If it is not readily available, we can use excellent approximation given by (see [2]):

$$I_0(u) \approx \frac{\cosh(u)}{(1 + 0.25u^2)^{1/4}} \frac{1 + 0.24273u^2}{1 + 0.43023u^2}. \quad (14)$$

And thus:

$$\hat{I}_0(u) \approx \frac{1}{(1 + 0.25u^2)^{1/4}} \frac{1 + 0.24273u^2}{1 + 0.43023u^2}. \quad (15)$$

Here we provide the codes in C. Note that we use Gauss-Legendre quadrature of 7th order, which seems good enough, but the code is easily modifiable if one wants to use higher-order quadratures.

```
#include <math.h>

#define PI 3.1415926;
#define SQRTHALFPI 1.2533141;
#define Sqrt2 1.4142135;

double fun_I0_hat(double u)
{
    return pow(1+0.25*u*u,-0.25)*(1 + 0.24273*u*u)/(1 + 0.43023*u*u);
}

double fun_f(double nu, double rho)
{
    double A1 = exp(-0.5*(rho-nu)*(rho-nu));
    double A2 = exp(-0.5*(rho+nu)*(rho+nu));
    return rho*(A1+A2)*fun_I0_hat(rho*nu);
}

double fun_f_hat(double nu, double rho, double rhobar)
{
    double A1 = exp(-0.5*(rho-nu)*(rho-nu) + 0.5*(rhobar-nu)*(rhobar-nu));
    double A2 = exp(-0.5*(rho+nu)*(rho+nu) + 0.5*(rhobar-nu)*(rhobar-nu));
    return rho*(A1+A2)*fun_I0_hat(rho*nu);
}

double max(double a, double b)
{
    if (a >= b)
    {
        return a;
    }
    else
    {
        return b;
    }
}

double min(double a, double b)
{
    if (a >= b)
    {
        return b;
    }
    else
    {
        return a;
    }
}

double Cir(double v, double h, double R)
{
    //The function should be called only for v >= 0
    v = abs(v);

    //Change here the Gauss-Legendre quadrature
    int N=7;
    double node[N] = {-0.94910, -0.74153, -0.40584, 0, 0.40584, 0.74153, 0.94910};
    double weight[N]= {0.12948,0.27970,0.38183,0.4179,0.38183,0.27970,0.12948};
    //end

    double F_low,F_up,delta,rhobar,y;

    if ( v <= R)
    {
```

```

F_low = max(0,sqrt((v/h)*(v/h)+1)-3);
F_up  = min(R/h,sqrt((v/h)*(v/h)+1)+3);
delta = 0.5*(F_up-F_low);

y=0;
for( int i=0; i<N; i++)
{
    y = y + weight[i]*fun_f(v/h,F_low + delta*(node[i]+1));
}
y = delta*y;
return -h*h*log(y*(h/R)*(h/R));
}
else
{
    F_low = 0;
    F_up  = R/h;
    delta = 0.5*(F_up-F_low);
    rhobar = F_low + delta*(node[N-1]+1);

    y=0;
    for( int i=0; i<N; i++)
    {
        y = y + weight[i]*fun_f_hat(v/h,F_low + delta*(node[i]+1),rhobar);
    }
    y = delta*y;
    return 0.5*(v-h*rhobar)*(v-h*rhobar)-h*h*log(y*(h/R)*(h/R));
}
}

```

III. FORMULAE FOR OBJECTS

A. Sphere

For a sphere of radius R centered at $p = [0; 0; 0]$ (see Figure 1), clearly $D_h^A(p)$ is radially symmetric, that is, $D_h^A(p)$ depends only on $\|p\|$. Then, without loss of generality, we can assume that $p = [0 \ 0 \ \|p\|]^T$.




Fig. 1. Sphere in the canonical pose.

Using spherical coordinates, $a_x = r \cos(\phi) \sin(\theta)$, $a_y = r \sin(\phi) \sin(\theta)$ and $a_z = r \cos(\theta)$, with $dV = r^2 \sin(\theta) dr d\theta d\phi$. Now, since we have that $\|p - a\|^2 = r^2 - 2r\|p\|\cos(\theta) + \|p\|^2$ we can conclude that

$$D_h^A(p) = -h^2 \log \left(\frac{3}{4\pi R^3} \int_0^{2\pi} \int_0^R \int_0^\pi e^{-\frac{r^2 - 2r\|p\|\cos(\theta) + \|p\|^2}{2h^2}} r^2 \sin(\theta) dr d\theta d\phi \right). \quad (16)$$

This can be rewritten as:

$$D_h^A(p) = -h^2 \log \left(\frac{3}{4\pi R^3} \int_0^{2\pi} \int_0^R r^2 e^{-\frac{r^2 + \|p\|^2}{2h^2}} \left(\int_0^\pi e^{\frac{r\|p\|\cos(\theta)}{h^2}} \sin(\theta) d\theta \right) dr d\phi \right). \quad (17)$$

The inner integral can be easily computed with the change of variables $v = r\|p\|\cos(\theta)/h^2$, resulting in:

$$D_h^A(p) = -h^2 \log \left(\frac{3h^2}{4\pi R^3 \|p\|} \int_0^{2\pi} \int_0^R r e^{-\frac{r^2 + \|p\|^2}{2h^2}} \left(e^{r\|p\|/h^2} - e^{-r\|p\|/h^2} \right) dr d\phi \right). \quad (18)$$

Using the fact that $e^{-\frac{r^2+\|p\|^2}{2h^2}}e^{r\|p\|/h^2} = e^{-\frac{(r-\|p\|)^2}{2h^2}}$, $e^{-\frac{r^2+\|p\|^2}{2h^2}}e^{-r\|p\|/h^2} = e^{-\frac{(r+\|p\|)^2}{2h^2}}$ and the fact that the integrand do not depend on ϕ , we can obtain

$$D_h^A(p) = -h^2 \log \left(\frac{3h^2}{2R^3\|p\|} \int_0^R r \left(e^{-\frac{(r-\|p\|)^2}{2h^2}} - e^{-\frac{(r+\|p\|)^2}{2h^2}} \right) dr \right). \quad (19)$$

Thus, if we define:

$$Sph_h(v, R) \triangleq -h^2 \log \left(\frac{3h^2}{2R^3v} \int_0^R r \left(e^{-\frac{(r-v)^2}{2h^2}} - e^{-\frac{(r+v)^2}{2h^2}} \right) dr \right) \quad (20)$$

then $D_h^A(p) = Esp_h(\|p\|, R)$. *Sph* stands for, of course, *Sphere*.

Now, note that:

$$\begin{aligned} \int_0^R r e^{-\frac{(r+v)^2}{2h^2}} dr &= \int_0^R (r+v-v) e^{-\frac{(r+v)^2}{2h^2}} dr = \\ \int_0^R (r+v) e^{-\frac{(r+v)^2}{2h^2}} dr - v \int_0^R e^{-\frac{(r+v)^2}{2h^2}} dr &= \\ h^2 \left(e^{-\frac{v^2}{2h^2}} - e^{-\frac{(R+v)^2}{2h^2}} \right) - v \sqrt{\frac{\pi}{2}} h \left(\text{Erf} \left(\frac{R+v}{\sqrt{2}h} \right) - \text{Erf} \left(\frac{v}{\sqrt{2}h} \right) \right). \end{aligned}$$

Analogously:

$$\begin{aligned} \int_0^R r e^{-\frac{(r-v)^2}{2h^2}} dr &= \\ h^2 \left(e^{-\frac{v^2}{2h^2}} - e^{-\frac{(R-v)^2}{2h^2}} \right) + v \sqrt{\frac{\pi}{2}} h \left(\text{Erf} \left(\frac{R-v}{\sqrt{2}h} \right) + \text{Erf} \left(\frac{v}{\sqrt{2}h} \right) \right). \end{aligned}$$

Then:

$$D_h^A(p) = -h^2 \log \left(\frac{3h^2}{2R^3} \left(h^2 \left(\frac{e^{-\frac{(R+v)^2}{2h^2}} - e^{-\frac{(R-v)^2}{2h^2}}}{v} \right) + 2Re^{-\text{Int}_h(v, R)/h^2} \right) \right). \quad (21)$$

This formula provides no problems if $v < R$ if we use the approximation for $\text{Int}_h(v, L)$ shown in Subsection II-D. However, for $v \geq R$ there can be numerical issues. In this case, we factor out $e^{-\frac{(R-v)^2}{2h^2}}$ to rewrite it as:

$$\frac{(v-R)^2}{2} - h^2 \log \left(\frac{3h^2}{2R^3} \left(h^2 \left(\frac{e^{-\frac{2Rv}{h^2}} - 1}{v} \right) + 2Re^{-\widehat{\text{Int}}_h(v, R)/h^2} \right) \right) \quad (22)$$

in which $\widehat{\text{Int}}_h(v, L) \triangleq \text{Int}_h(v, L) - \frac{(v-L)^2}{2}$. Note that, when $v = 0$, we need the limit

$$\lim_{v \rightarrow 0} \left(\frac{e^{-\frac{(R+v)^2}{2h^2}} - e^{-\frac{(R-v)^2}{2h^2}}}{v} \right) = -\frac{2R}{h^2} e^{-\frac{R^2}{2h^2}}. \quad (23)$$

Here is the C code:

```
double Sph(double v, double h, double R)
{
    //The function should be called only for v >= 0
    v = abs(v);

    double C = 3*(h*h)/(2*R*R*R);
    double A1, A2;
    if ( v <= R)
    {
        if (v==0)
        {
            return -h*h*log(C*(-2*R*exp(-(R*R)/(2*h*h)) + 2*R*exp(-Int(0,h,R)/(h*h))));
        }
    }
    else
    {

```

```

A1 = exp(-((R+v)*(R+v)/(2*h*h)));
A2 = exp(-((R-v)*(R-v)/(2*h*h)));
return -h*h*log(C*(h*h*(A1-A2)/v + 2*R*exp(-Int(v,h,R)/(h*h))));
}
}
else
{
A1 = exp(-(2*R*v/(h*h)));
A2 = 1;
return 0.5*(v-R)*(v-R)-h*h*log(C*(h*h*(A1-A2)/v + 2*R*exp((0.5*(v-R)*(v-R)-Int(v,h,R)/(h*h))));
}
}

```

B. Box

For a box centered at $p = [0 \ 0 \ 0]^T$ with sides ℓ_x , ℓ_y and ℓ_z aligned with the x , y and z axis, respectively (see Figure 2), we have that $\mathcal{A} = [-\frac{\ell_x}{2}, \frac{\ell_x}{2}] \times [-\frac{\ell_y}{2}, \frac{\ell_y}{2}] \times [-\frac{\ell_z}{2}, \frac{\ell_z}{2}]$.

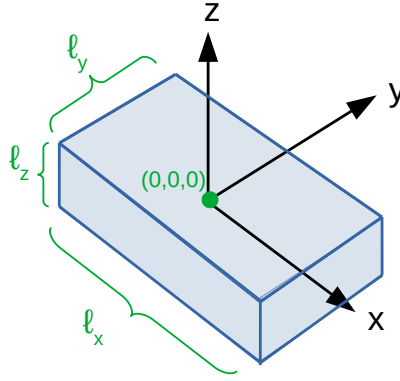


Fig. 2. Box in the canonical pose.

Thus, using the Cartesian product property (Subsection II-C) and the fact that for $\mathcal{A}_i = [-\frac{\ell_i}{2}, \frac{\ell_i}{2}]$ and $p^i \in \mathbb{R}$, $D_h^{\mathcal{A}_i}(p^i) = \text{Int}_h(p^i, \frac{\ell_i}{2})$, we have that

$$D_h^{\mathcal{A}}(p) = \text{Int}_h\left(x, \frac{\ell_x}{2}\right) + \text{Int}_h\left(y, \frac{\ell_y}{2}\right) + \text{Int}_h\left(z, \frac{\ell_z}{2}\right). \quad (24)$$

We can use the approximation for $\text{Int}_h(v, L)$ shown in Subsection II-D.

C. Cylinder

For a cylinder centered at $p = [0; 0; 0]$ with radius R and height H (see Figure 3), we use the fact that $\mathcal{A} = \mathcal{C}(R) \times [-H/2, H/2]$, in which $\mathcal{C}(R)$ is a circle centered at the origin of \mathbb{R}^2 with radius R .

We first compute $D_h^{\mathcal{C}(R)}(p_{xy})$, in which $p_{xy} = [x \ y]^T$. We can exploit the fact that the distance function for $\mathcal{C}(R)$ is radially symmetric in the variables p_{xy} , that is, the distance depends only on $\sqrt{x^2 + y^2}$. Thus, without loss of generality, we can assume $p_{xy} = [\sqrt{x^2 + y^2} \ 0]^T$. Plugging this into the integral definition for $D_h^{\mathcal{C}(R)}(p_{xy})$, using polar coordinates, the definition of the modified Bessel function of the first kind of order 0 and the results in Subsection II-C, we can see that $D_h^{\mathcal{C}(R)}(p_{xy}) = \text{Cir}_h(\sqrt{x^2 + y^2}, R)$.

Thus, using the Euclidean product property (Subsection II-C), we have that:

$$D_h^{\mathcal{A}}(p) = \text{Cir}_h(\sqrt{x^2 + y^2}, R) + \text{Int}_h\left(z, \frac{H}{2}\right). \quad (25)$$

We can then use the approximation for $\text{Int}_h(v, L)$ and $\text{Cir}_h(v, R)$ shown in Subsections II-D and II-C, respectively.

REFERENCES

- [1] C. Ren and A. R. MacKenzie, "Closed-form approximations to the error and complementary error functions and their applications in atmospheric science," *Atmospheric Science Letters*, vol. 8, no. 3, pp. 70–73, 2007. [Online]. Available: <https://rmets.onlinelibrary.wiley.com/doi/abs/10.1002/asl.154>
- [2] J. Olivares, P. Martin, and E. Valero, "A simple approximation for the modified bessel function of zero order i0(x)," vol. 1043, p. 012003, jun 2018.




Fig. 3. Cylinder in the canonical pose.