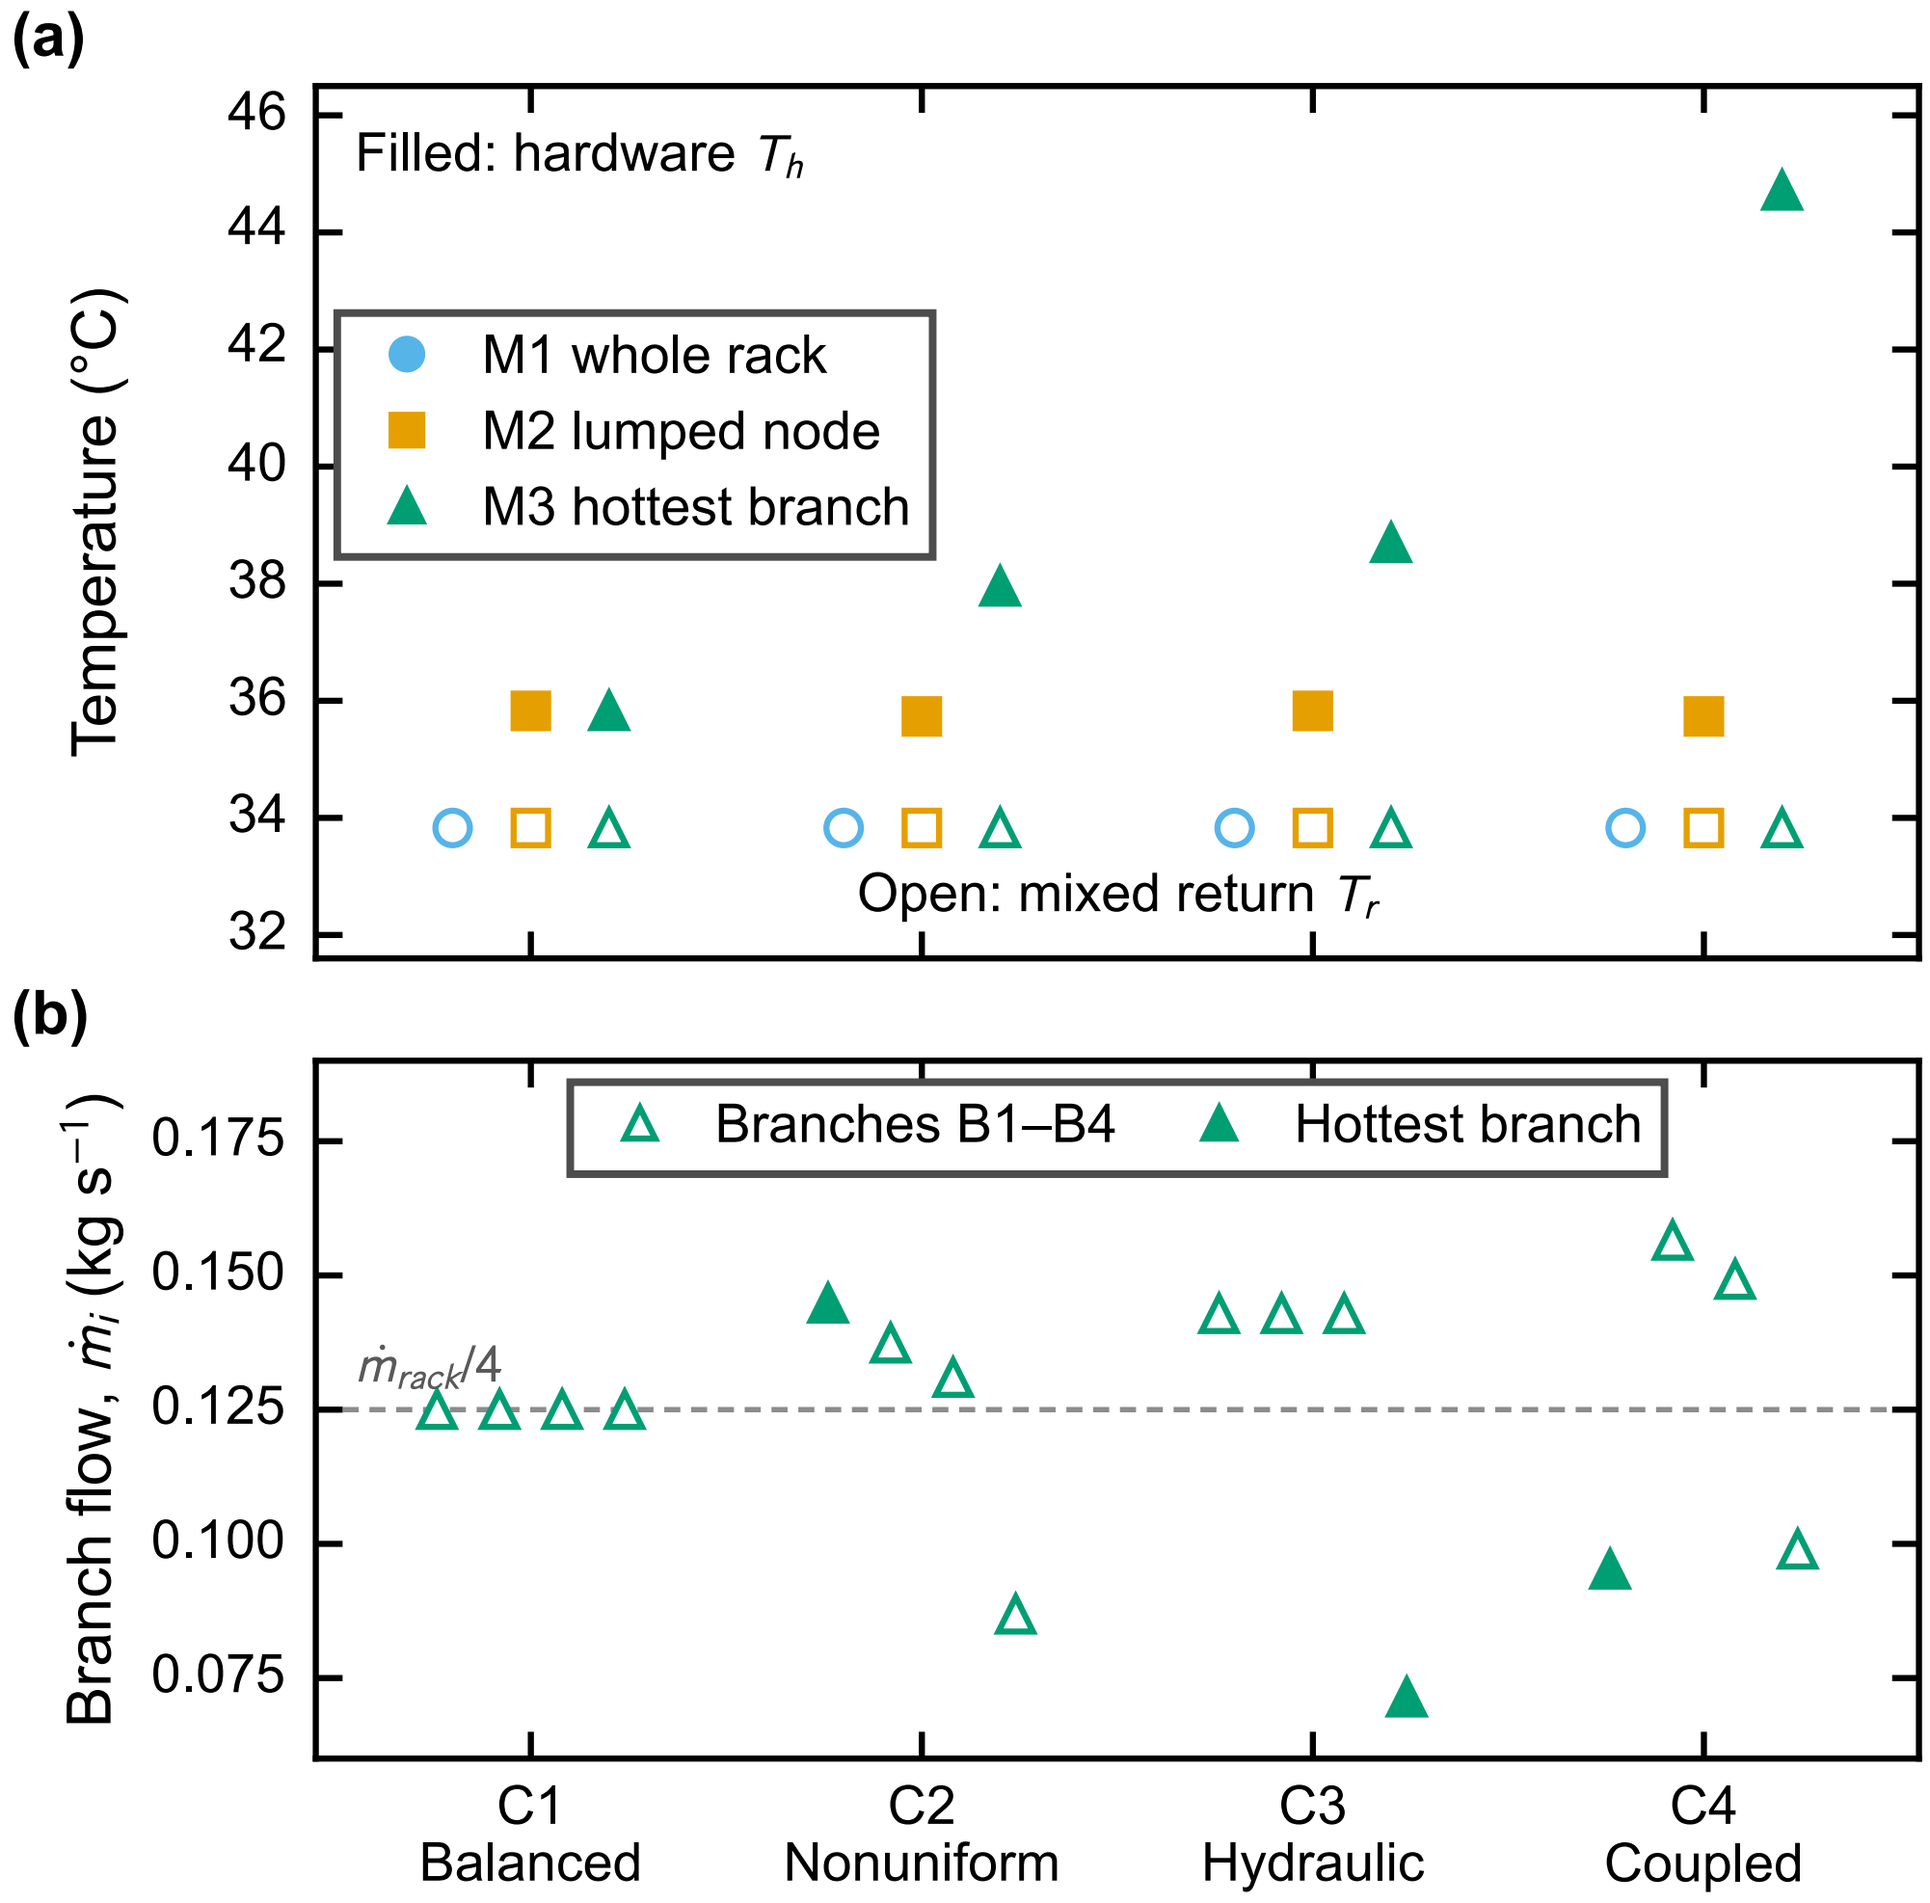
(a)
Filled: hardware T_h
M1 whole rack
M2 lumped node
M3 hottest branch
Temperature (°C)
46
44
42
40
38
36
34
32
Open: mixed return T_r
(b)
Branches B1–B4
Hottest branch
Branch flow, $\dot{m}_i$ (kg s^{-1})
0.175
0.150
0.125
0.100
0.075
$\dot{m}_{rack}/4$
C1
Balanced
C2
Nonuniform
C3
Hydraulic
C4
Coupled