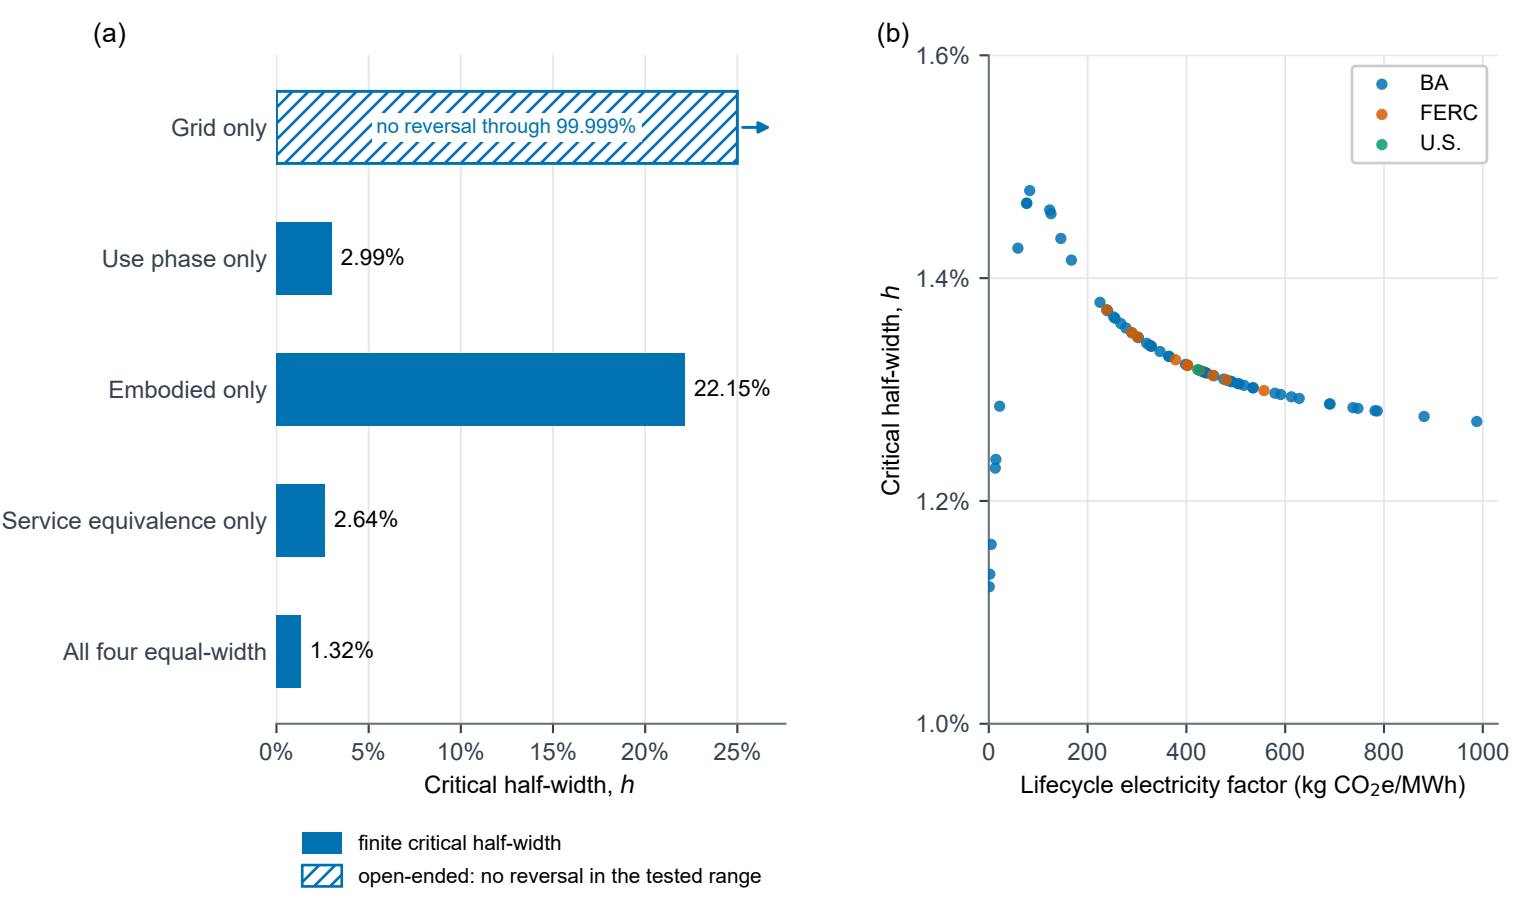
(a)
Grid only
no reversal through 99.999%
Use phase only
2.99%
Embodied only
22.15%
Service equivalence only
2.64%
All four equal-width
1.32%
0%
5%
10%
15%
20%
25%
Critical half-width, h
finite critical half-width
open-ended: no reversal in the tested range
(b)
1.6%
1.4%
1.2%
1.0%
Critical half-width, h
BA
FERC
U.S.
0
200
400
600
800
1000
Lifecycle electricity factor (kg CO2e/MWh)