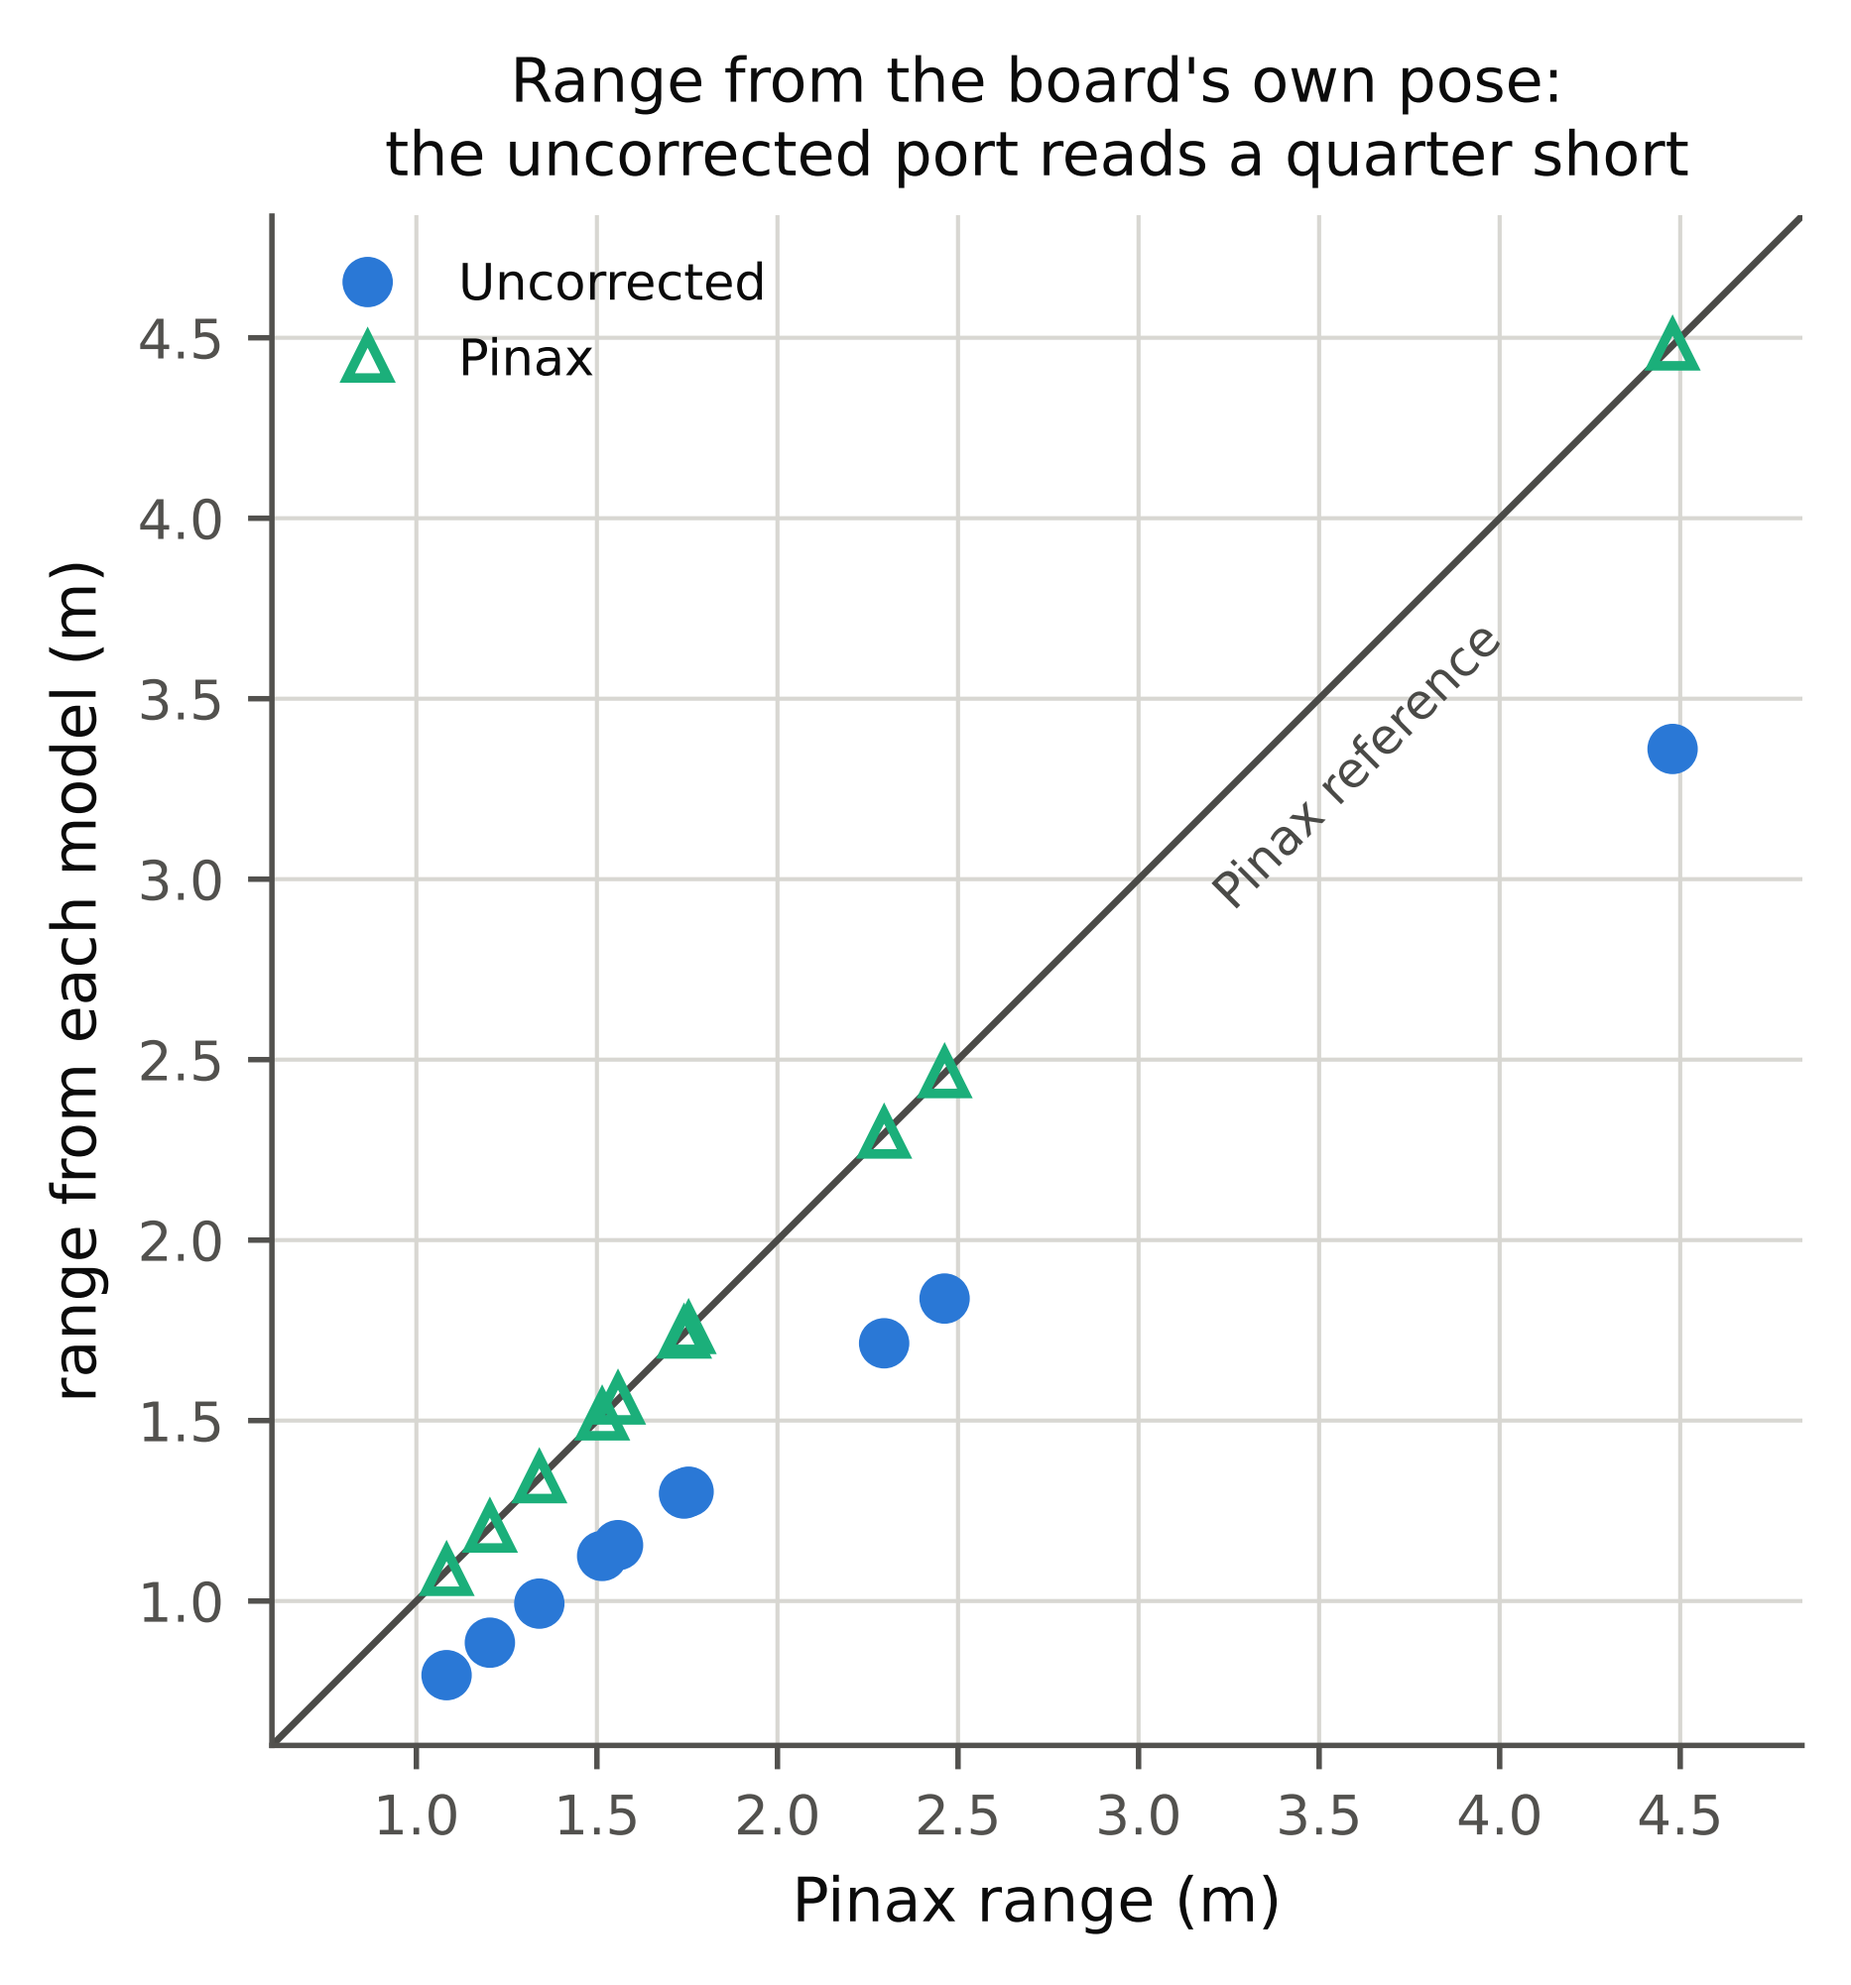
Range from the board's own pose:
the uncorrected port reads a quarter short
Uncorrected
Pinax
Pinax reference
range from each model (m)
Pinax range (m)
1.0
1.5
2.0
2.5
3.0
3.5
4.0
4.5