


Power Input

Power Input and Filtering


File: power_input.kicad_sch

Laser Output Connections




Laser Driver Input


NO GND POUR ALONG SIGNAL_IN AND SIGNAL_GND LINES



Input Isolation

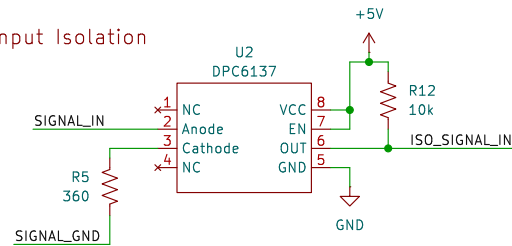


Signal Prep and PECL Translation

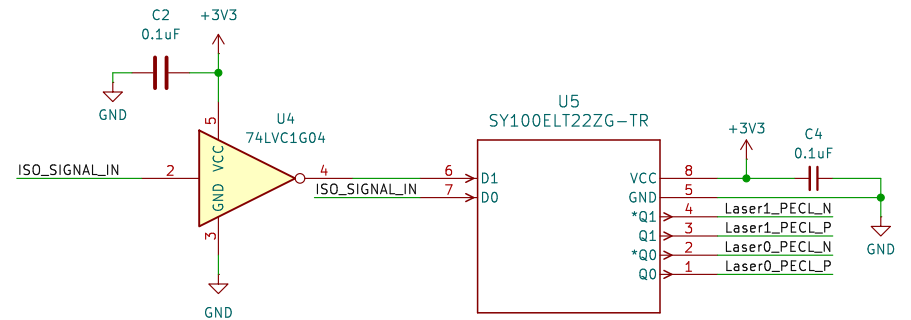


Laser 1 Driver (Inverting)

See datasheet for R_MODSET value selection and jumper usage. Two resistors placed for R_MODSET intended for footprint flexibility.

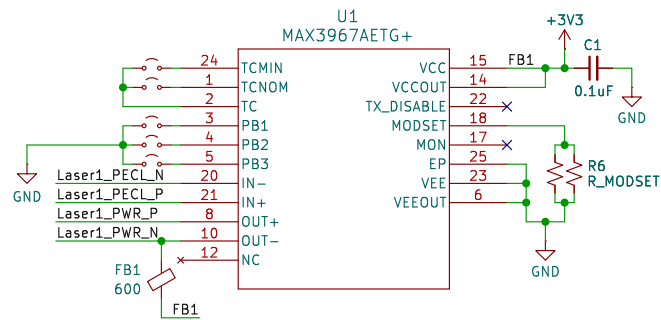


Laser 0 Driver (non-Inverting)


See datasheet for R_MODSET value selection and jumper usage. Two resistors placed for R_MODSET intended for footprint flexibility.

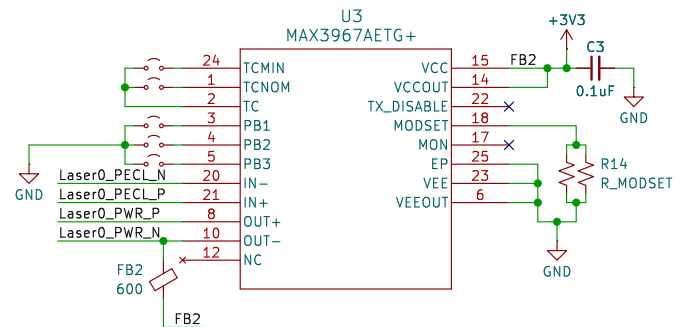


Mounting Holes



PECL Termination 1



PECL Termination 0



Laser Driver

UChicago Space Program

Designed by Dylan Hu, Graydon SK

Sheet: /

File: LaserDriver.kicad_sch

Size: USLetter

Date: 2026-02-17

Rev: v1.1

KiCad E.D.A. 9.0.7

Id: 1/2

D1
CMS06(Te12L,Q,M)


PWR_FLAG VIN

1 J5
VIN Banana

1 J6
2 VIN Pin Header

1 J7
GND Banana

RAW_GND

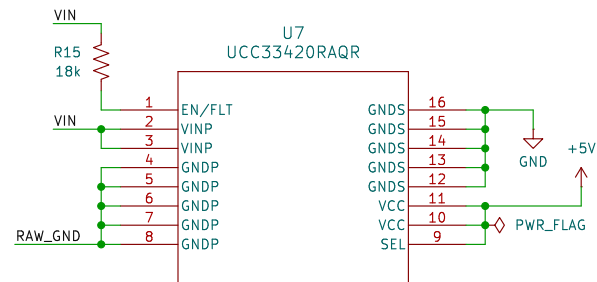

A circuit diagram showing two capacitors, C9 and C10, connected in parallel. C9 has a value of 15nF and C10 has a value of 22uF. The parallel combination is connected to a +5V supply at the top and a GND symbol at the bottom. The components are labeled with their respective values and the supply is labeled +5V and GND.