




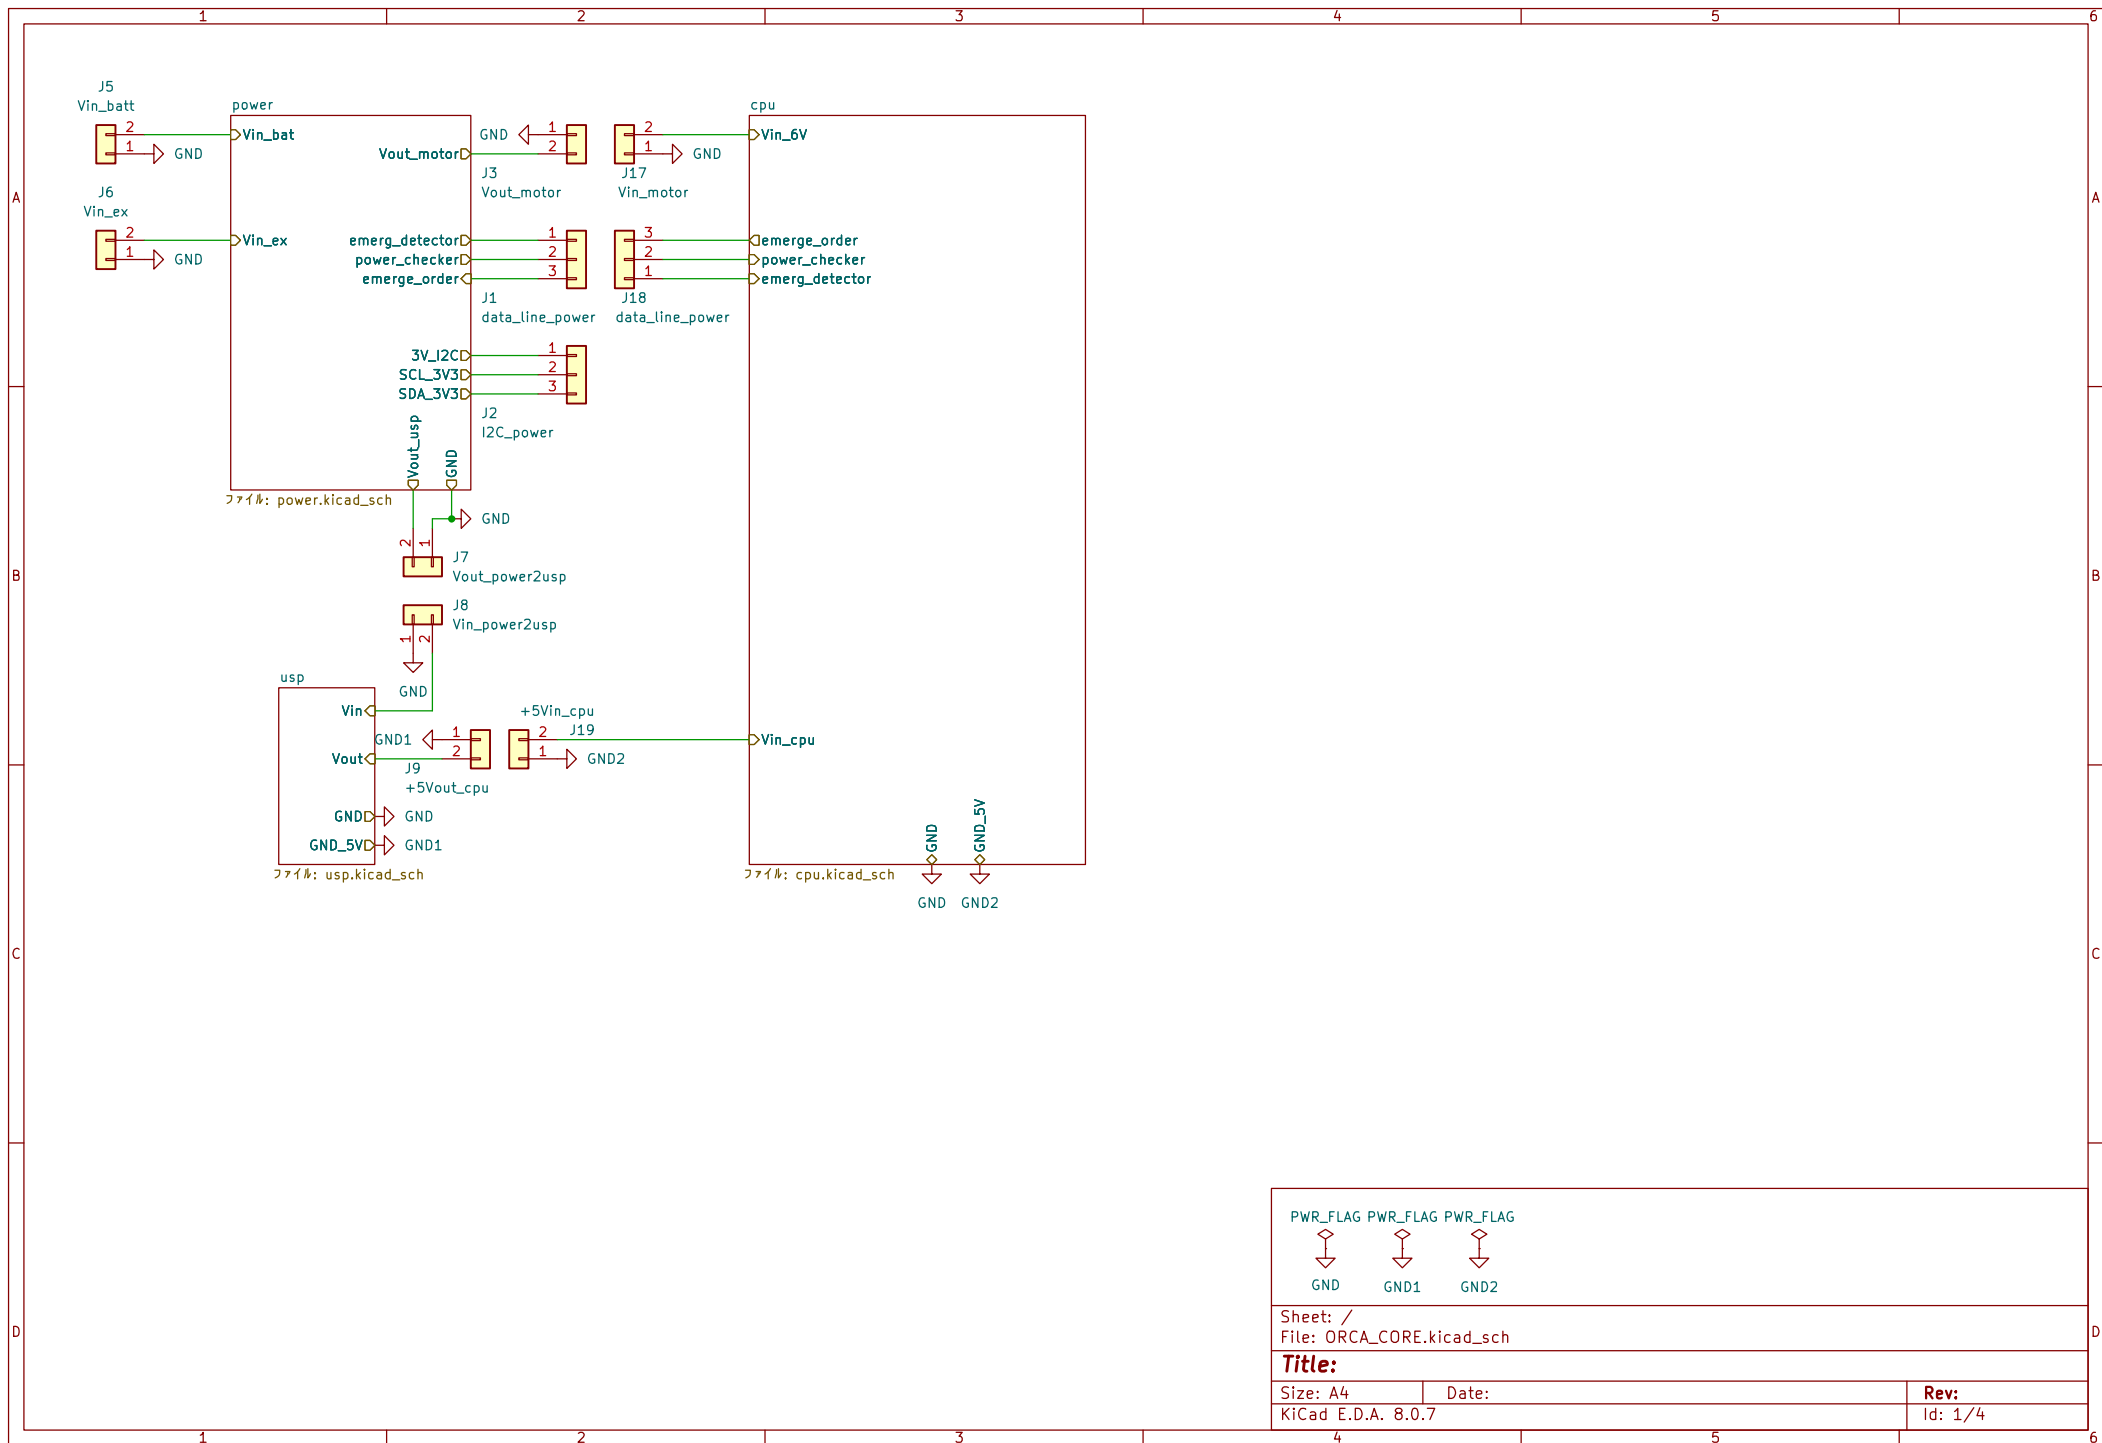


power

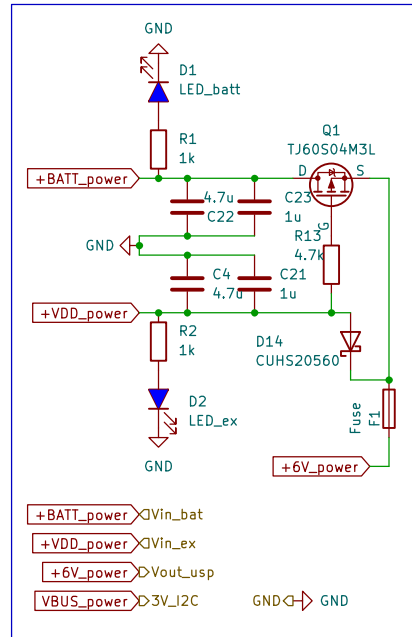


DCDC 5V 1.5A

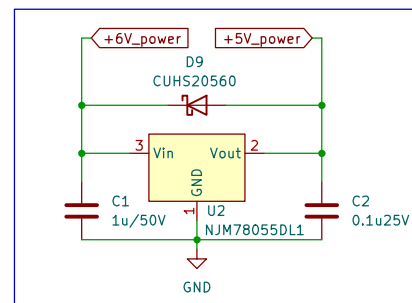


DCDC 3V3 0.75A

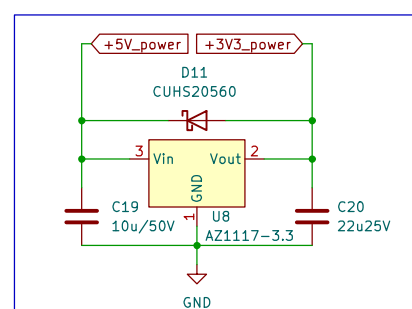

voltage feedback

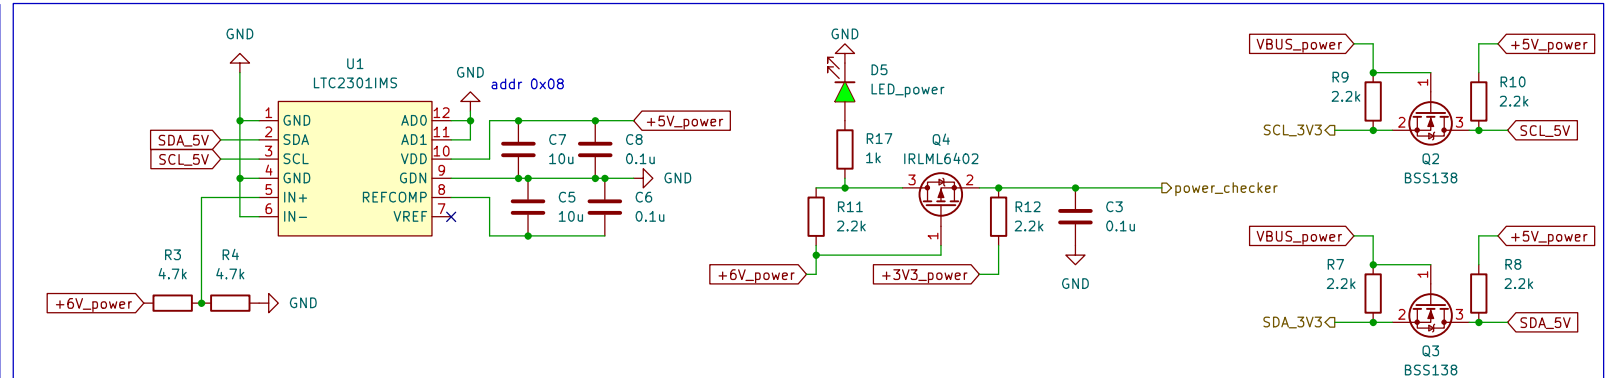

relay

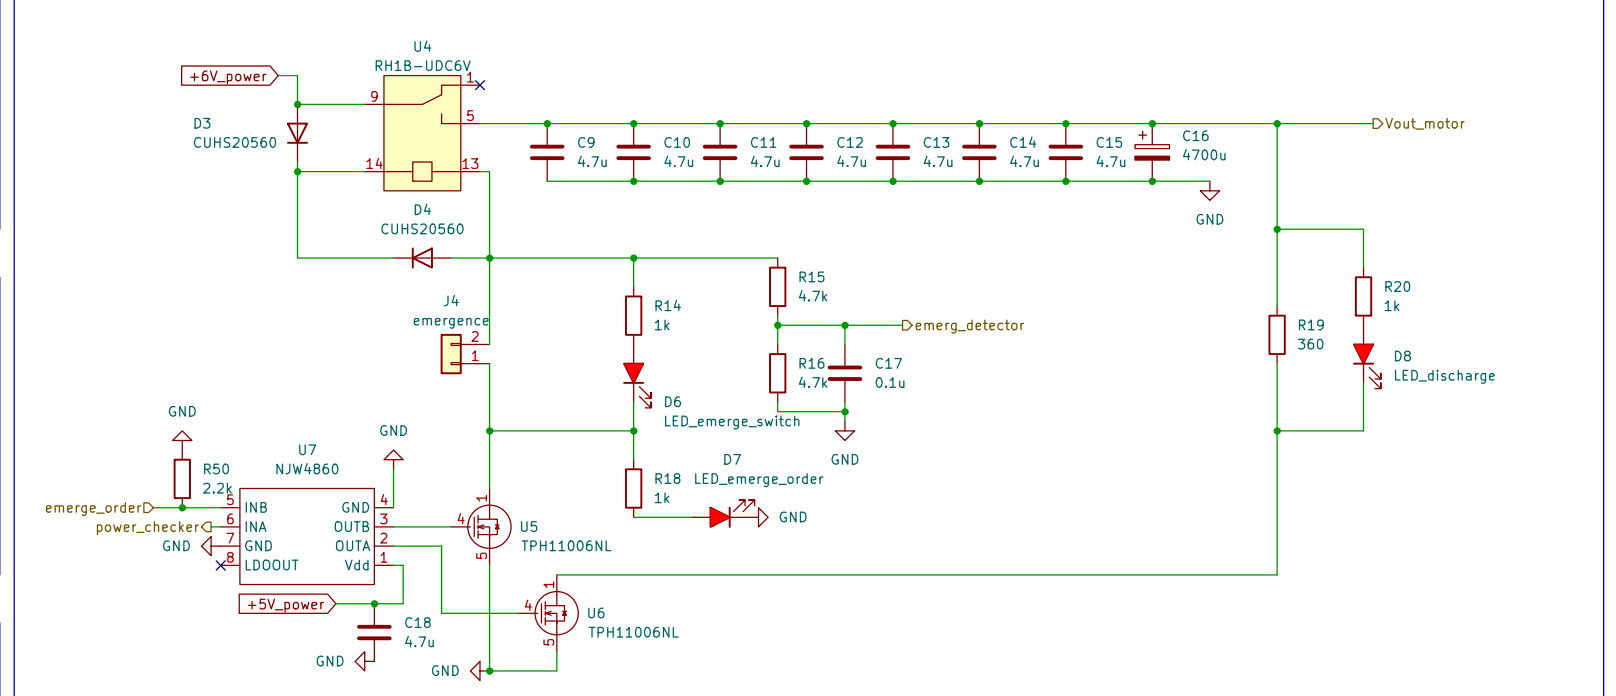

+6V_power > PWR_FLAG	VBUS_power > PWR_FLAG	H1 Hole_power	H3 Hole_power
+BATT_power > PWR_FLAG	+5V_power > PWR_FLAG	H2 Hole_power	H4 Hole_power
+VDD_power > PWR_FLAG	+3V3_power > PWR_FLAG		

Sheet: /power/
File: power.kicad_sch


Title:

Size: A4
KiCad E.D.A. 8.0.7


Date:

Rev:
Id: 2/4


power

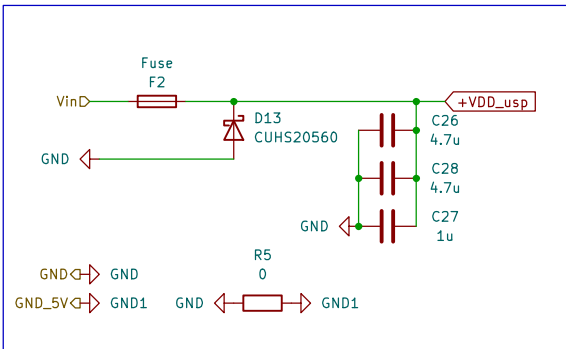


9V -> 5V3A DCDC

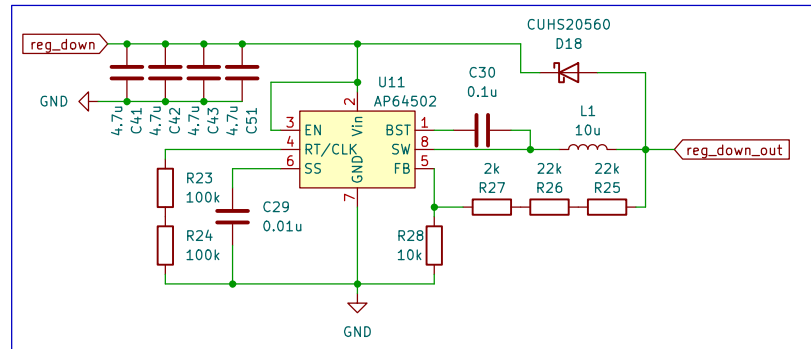


3.3V -> 5V2.5A DCDC

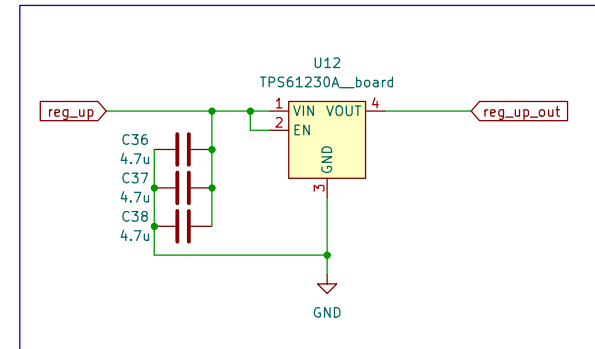


charger

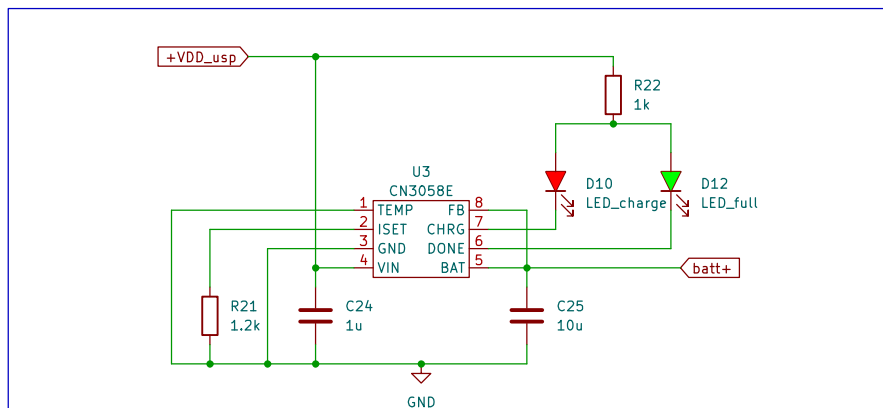

battery protection

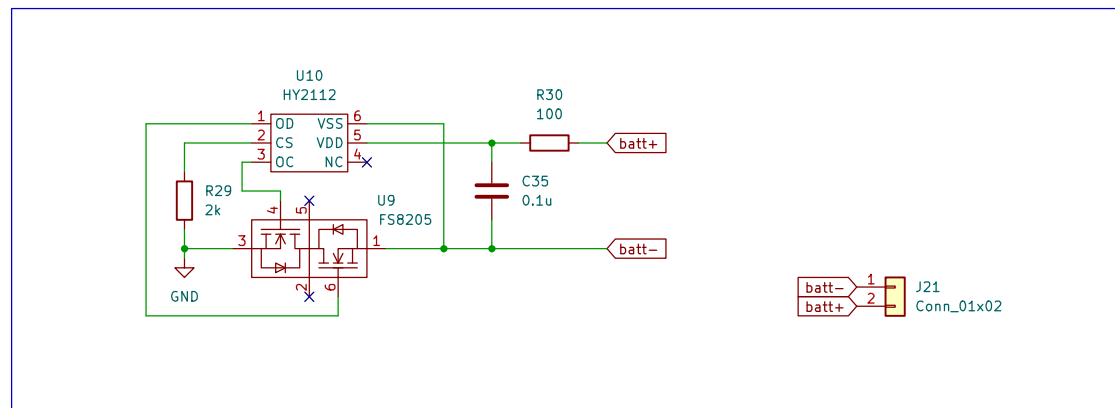

load sharing system

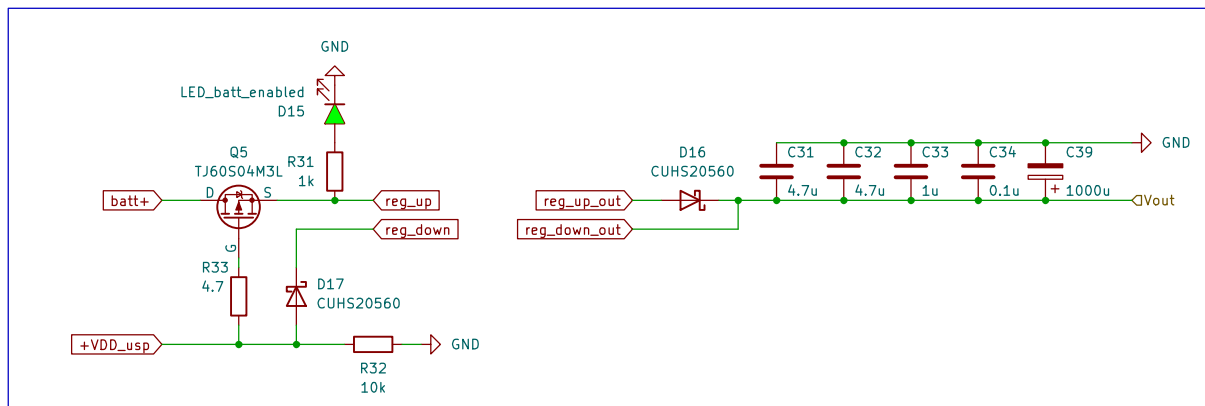

+VDD_osp	PWR_FLAG	reg_up_out	PWR_FLAG	H5	Hole_osp
batt+	PWR_FLAG	reg_down_out	PWR_FLAG	H6	Hole_osp

Sheet: /usp/
File: usp.kicad_sch


Title:

Size: A4
KiCad E.D.A. 8.0.7


Date:

Rev:
Id: 3/4


power

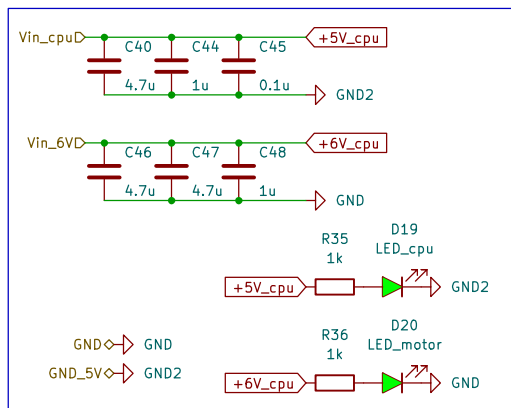


I2C

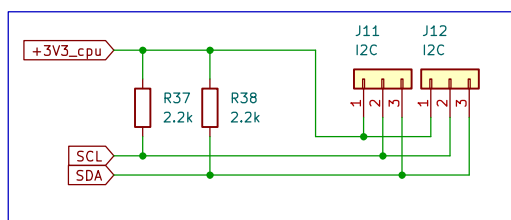


UART

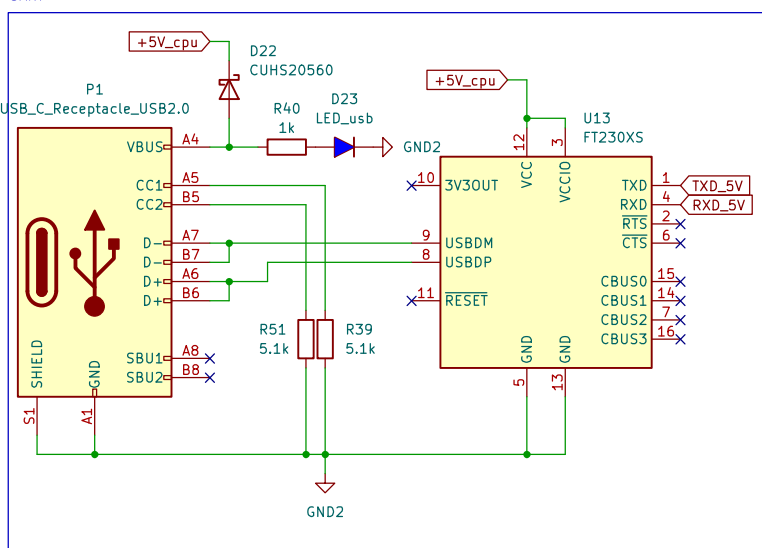


DCDC 5V 1.5A

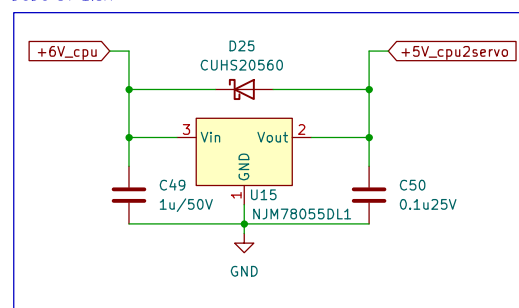


out

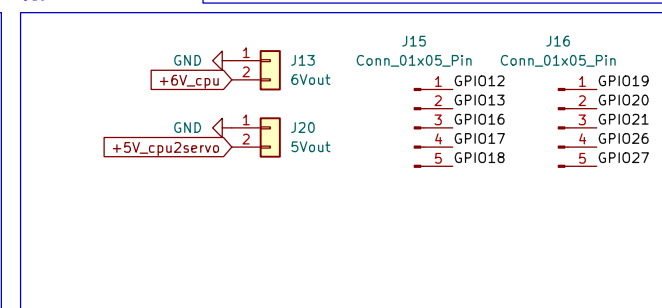

bn055

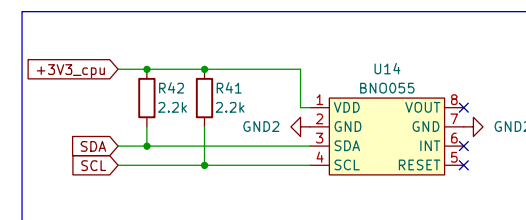

full color led

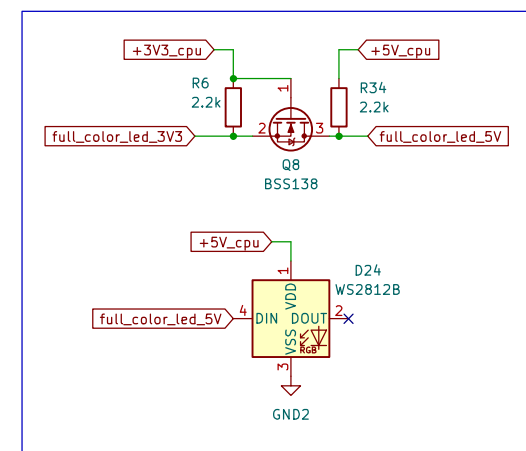

+6V_cpu	PWR_FLAG	+5V_cpu2servo	PWR_FLAG	H9	Hole_cpu
+5V_cpu	PWR_FLAG			H10	Hole_cup
+3V3_cpu	PWR_FLAG				

Sheet: /cpu/
File: cpu.kicad_sch

Title:

Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.7		Id: 4/4