


When in the plane, the microcontroller will get its power from a battery via the Vin pin.

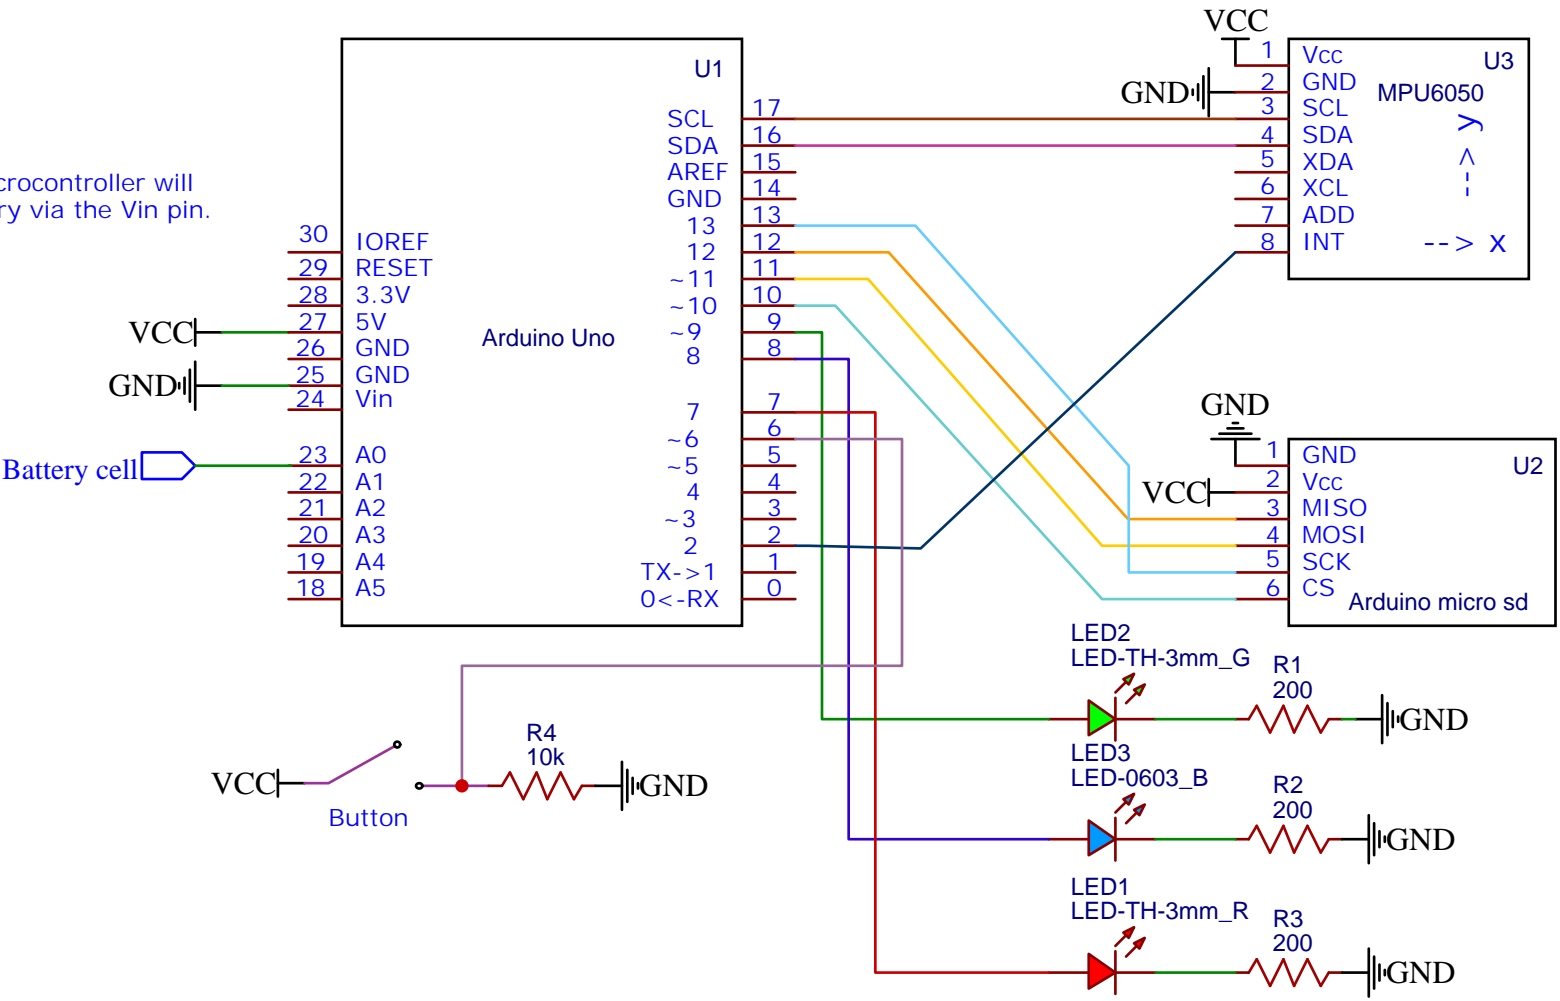

These LEDs are used to indicate the status of the avionics package.
Green: Ready to start
Blue (actually yellow): Standby
Red: Blinks every time it takes a sample

TITLE: Avionics Prototype		REV: 1.0
EasyEDA	Company: DBF	Sheet: 1/1
	Date: 2021-01-23	Drawn By: ereussow