


When in the plane, the microcontroller will get its power from a spare channel on the receiver. This power will be routed through the Vin pin

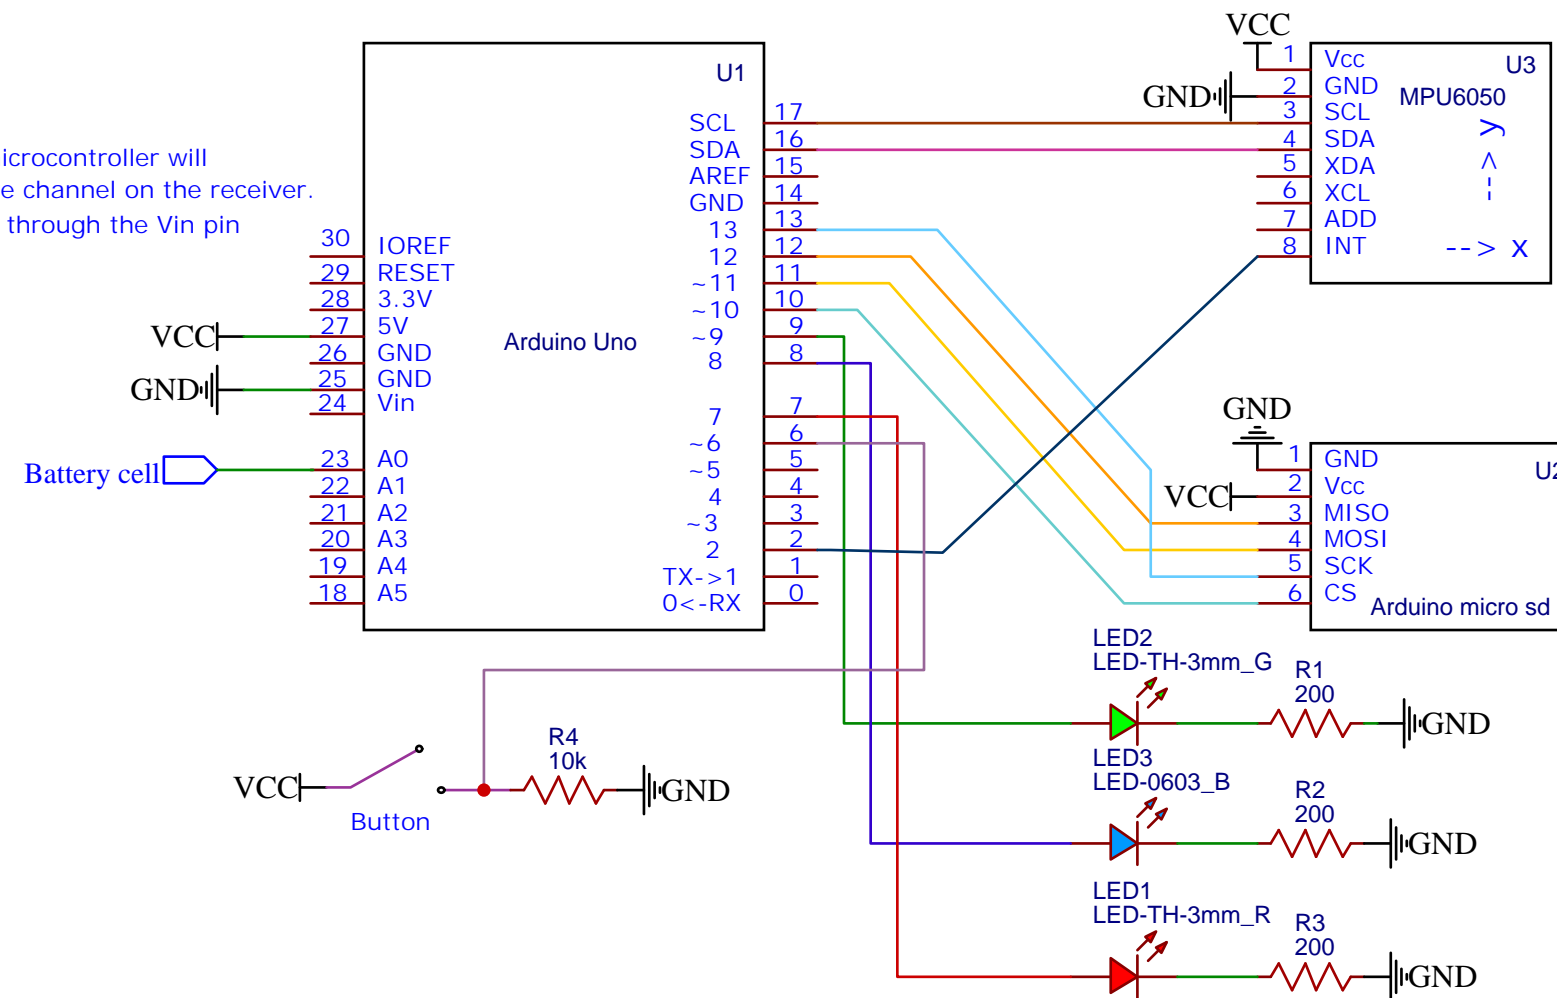

These LEDs are used to indicate the status of the avionics package.
 Green: Ready to start
 Blue (actually yellow): Standby
 Red: Blinks every time it takes a sample

TITLE: Avionics Prototype		REV: 1.0
EasyEDA	Company: DBF	Sheet: 1/1
	Date: 2021-01-23 Drawn By: ereussow	