



DC-DC Booster

Takes the VCC line, and increases the voltage to +30V. is actually 27.5v
This HV line is used to provide the reverse bias to the SiPM. Accounts for potential -1.29v vibas drift from 20C to -40

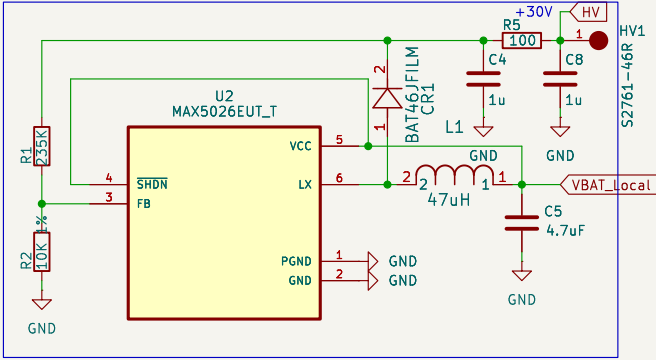


+3v3

Takes the battery line and regulates the voltage to 3.3v for the logic electronics

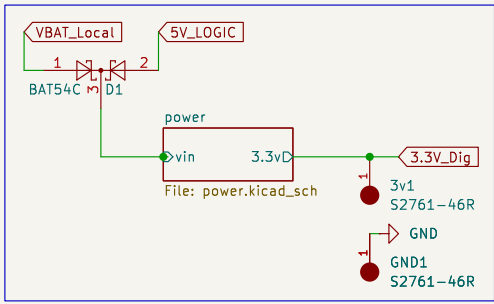


+5V

This creates the 5V supply that we use for the readout

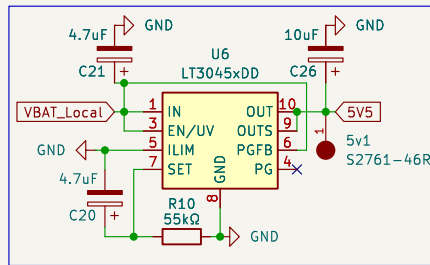


-5V

does the input voltage need to be higher than 5v?

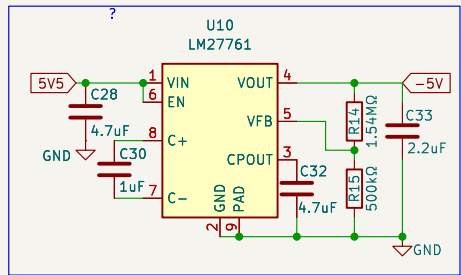


Readout

Captures the current pulse from the SiPM

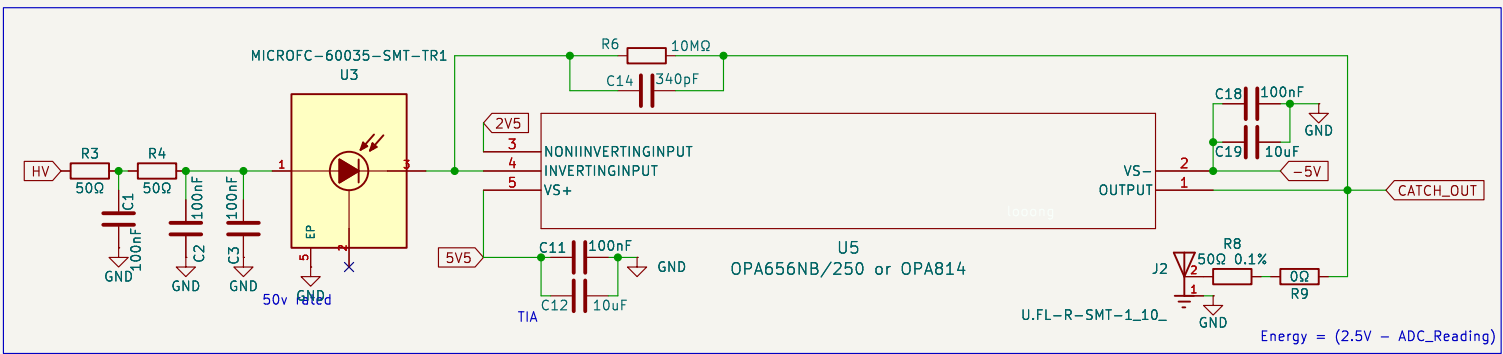


-2.5V

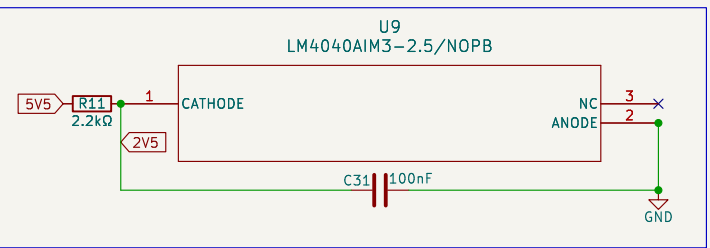


Logging


STM32 mcu, nand flash, can transciever, together operate the sensor, catch the pulses and log the data

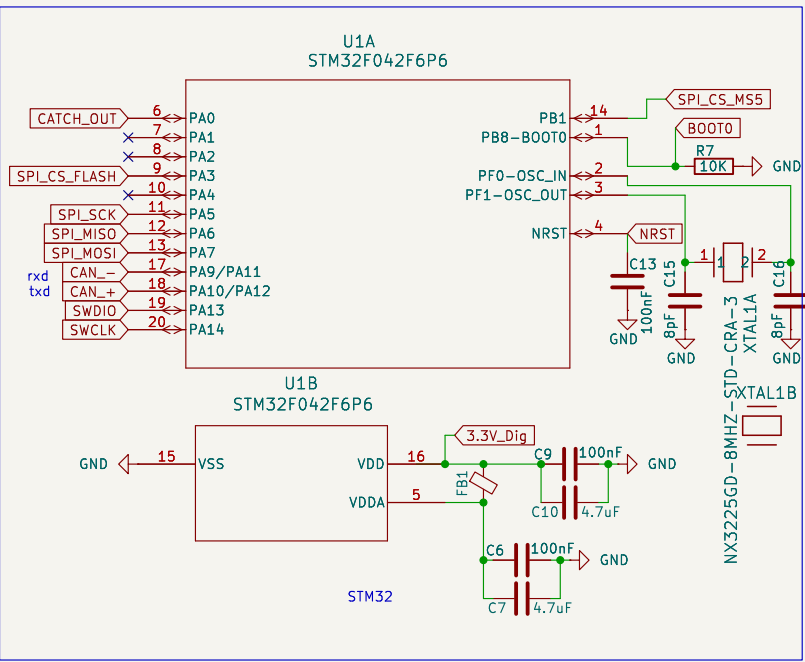


Flash

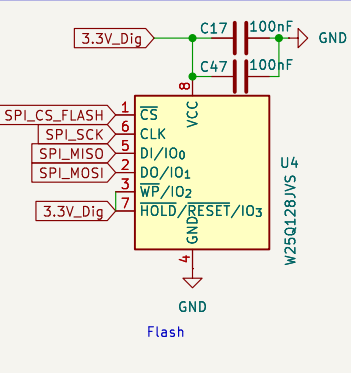


Connector

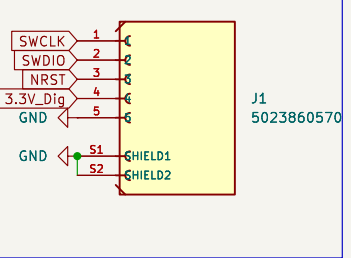

Can

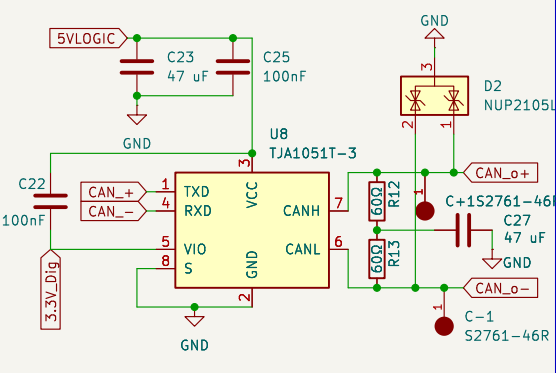

Barometer

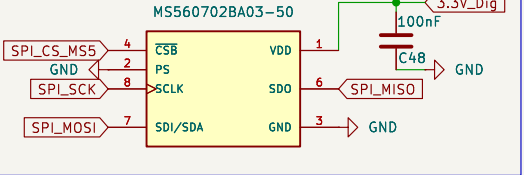

Connectors

read it again

