

Takes the VCC line, and increases the voltage to +32.5V.

This HV line is used to provide the reverse bias to the SiPM. Accounts for potential -1.29V bias drift from 20°C to -40°C





yes.



Amplifies, detects and registers the current pulse from the SiPM



STM32 mcu, nand flash, can transciever, together operate the sensor, catch the pulses and log the data



<https://ie.rs-online.com/web/p/pcb-headers/2155821>

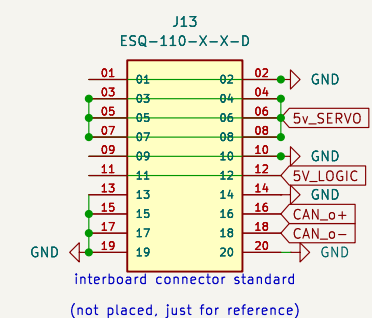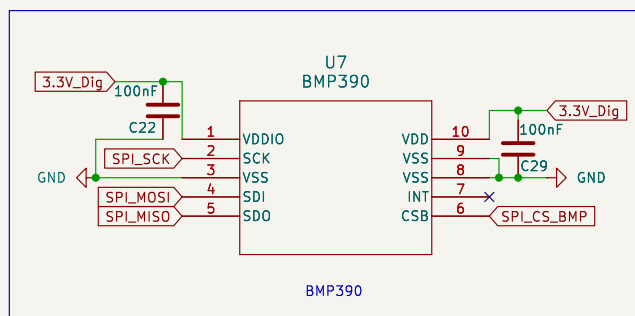

Title:

Size: A3	Date:	Rev:
KiCad E.D.A. 9.0.6		Id: 1/2