

### E-Match Trigger Circuit

### Pyro Connectors

### CAN transceiver


### 5V to 3.3V Regulation

### STM32

STM MCU, 10 Pin connector

### Board Connectors

|                    |         |                        |  |
|--------------------|---------|------------------------|--|
| Sheet: /           |         | File: Pleasc.kicad_sch |  |
| <b>Title:</b>      |         |                        |  |
| Size: A3           | Date:   | Rev:                   |  |
| KiCad E.D.A. 9.0.6 | Id: 1/2 |                        |  |

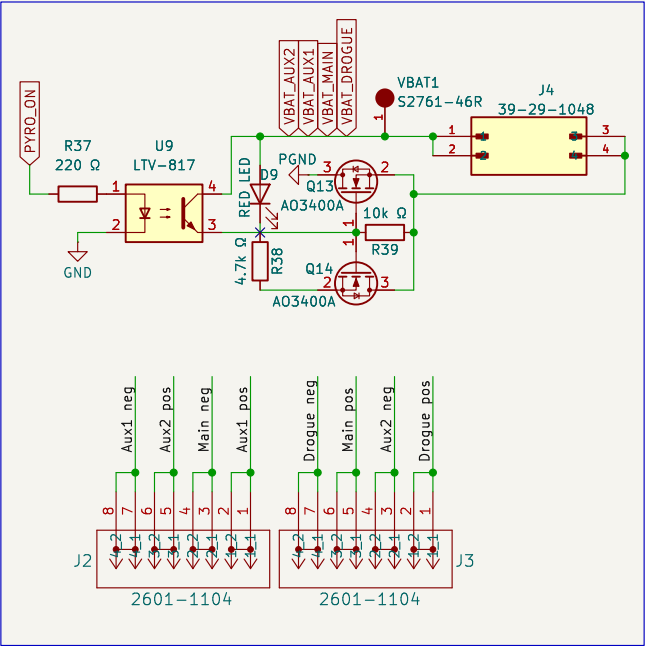

5VLOGIC

C17 47 uF

C19 100nF

GND

U11 TJA1051T-3

C16 100nF

CAN\_+ CAN\_-

TXD RXD VIO S

CANH CANL

3.3V

GND

CAN-1 S2761-46R

D10 NUP2105L

R40 60 Ω

R41 60 Ω

C20 47 uF


CAN\_+ CAN\_-

GND

Only add 60 ohm resistors if Pleasic is at either end of the stack.

File: power.kicad\_sch

STM MCU, 10 Pin connector

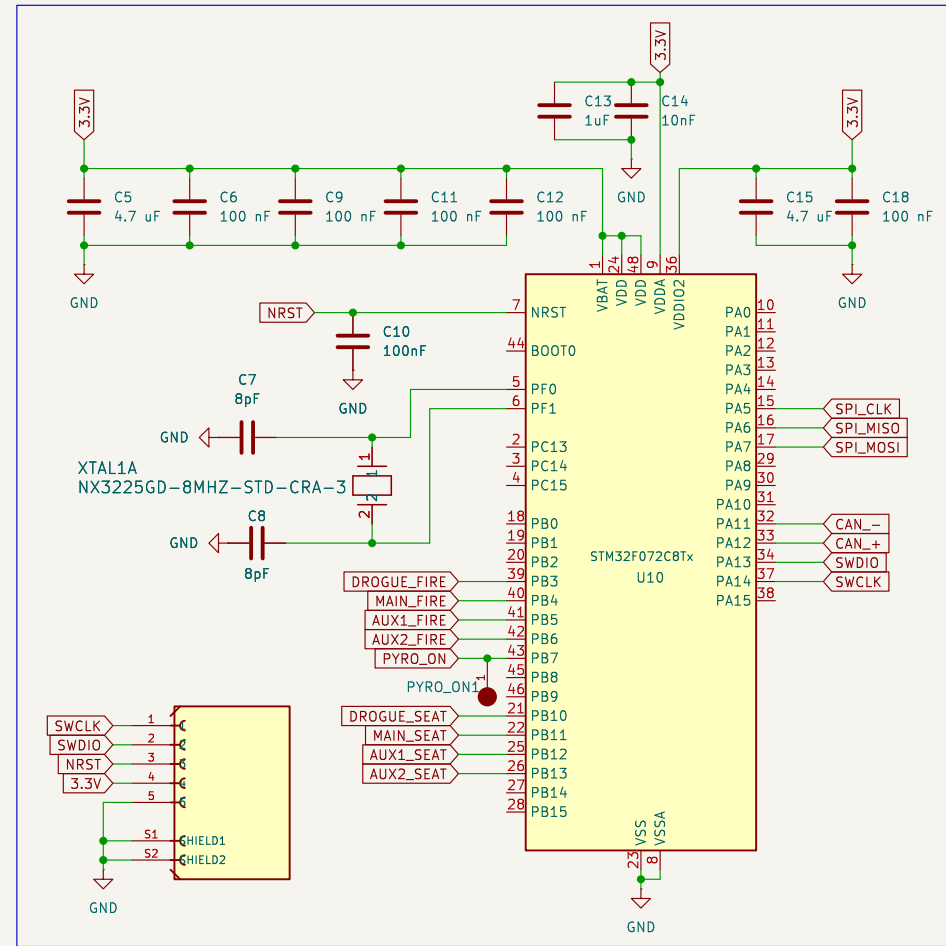

Pinout diagram for the interboard connector (J6) of the ESQ-110-14-G-D. The connector has 20 pins arranged in two rows of 10. The pinout is as follows:

| Pin | Signal   |
|-----|----------|
| 01  | GND      |
| 02  | 5V5SERVO |
| 03  | GND      |
| 04  | 5V5LOGIC |
| 05  | GND      |
| 06  | GND      |
| 07  | CAN_o+   |
| 08  | CAN_o-   |
| 09  | GND      |
| 10  | GND      |
| 11  | GND      |
| 12  | GND      |
| 13  | CAN_o+   |
| 14  | CAN_o-   |
| 15  | GND      |
| 16  | GND      |
| 17  | GND      |
| 18  | GND      |
| 19  | GND      |
| 20  | GND      |