

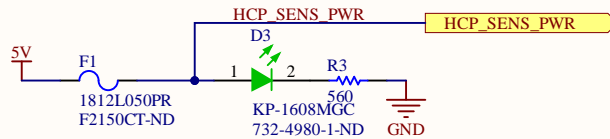
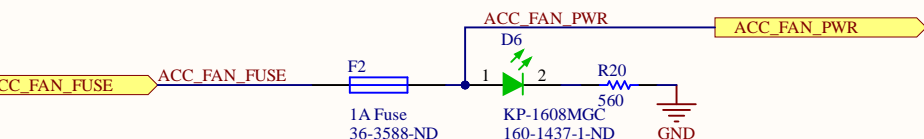
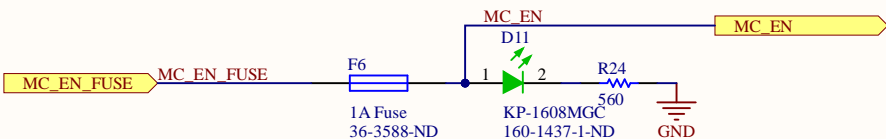
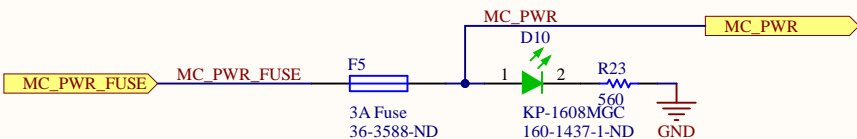
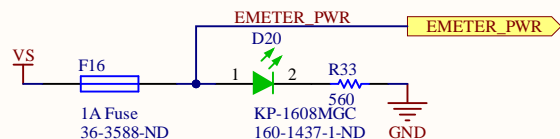
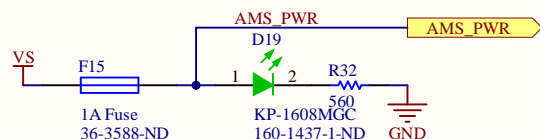
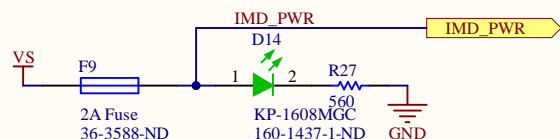
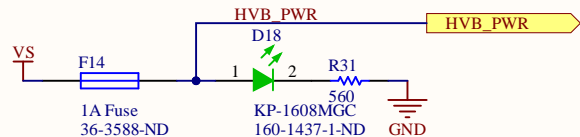
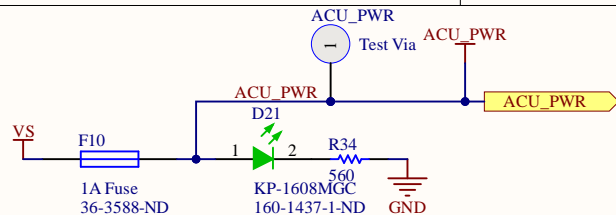
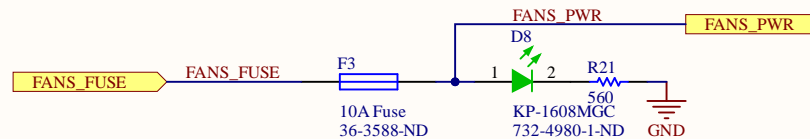
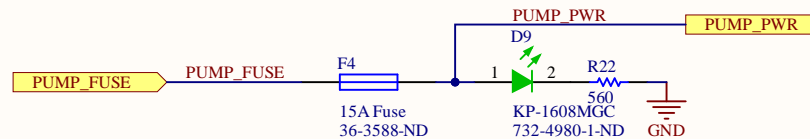
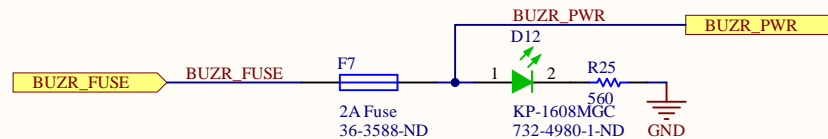
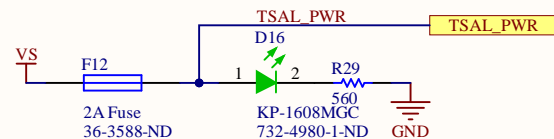
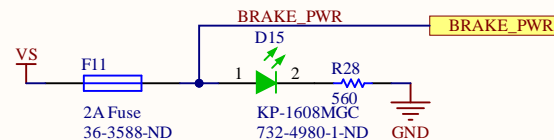
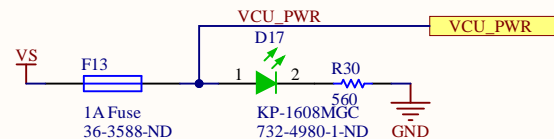


A

A

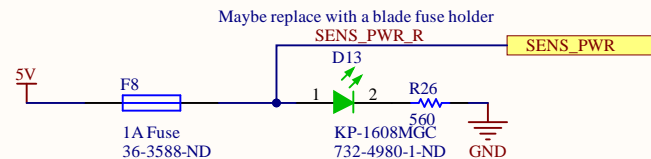

ATS2127-ND heatsink
696-1688-5-ND

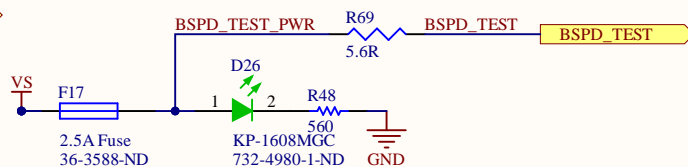

B

B



C

C

D


D

Title		
Size	Number	Revision
A4		
Date:	11-27-2021	Sheet of
File:	C:\Users\...\3 - Fuses.SchDoc	Drawn By:

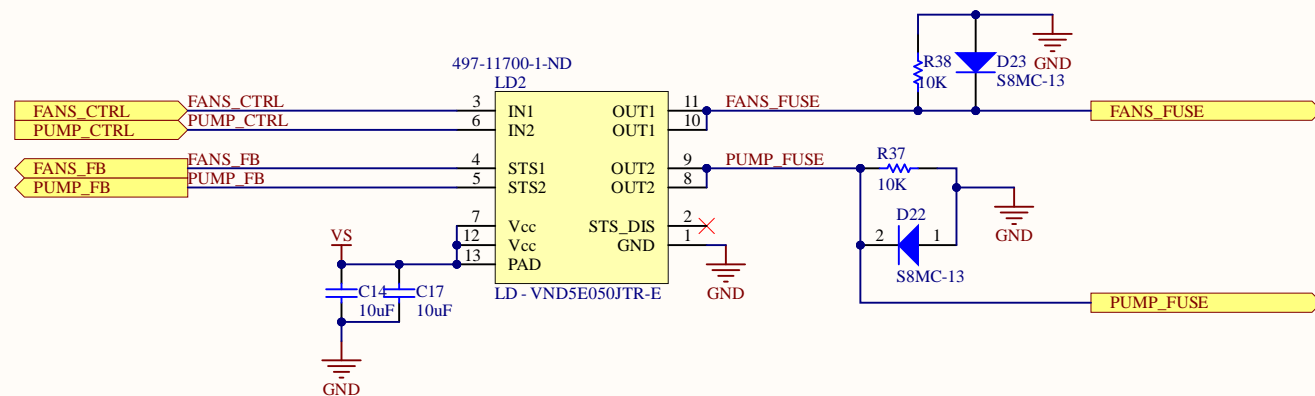
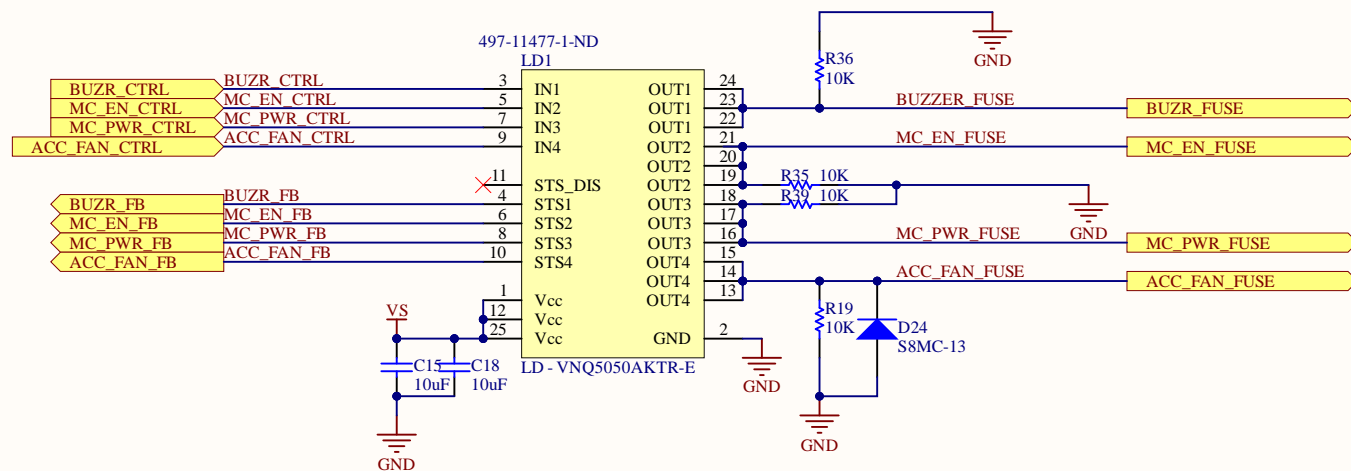


Title		
Size	Number	Revision
A4		
Date:	11-27-2021	Sheet of
File:	C:\Users\...\6 - Load Drivers.SchDoc	Drawn By:

VBATT is delayed by 10 seconds to allow IMD to send OK signal

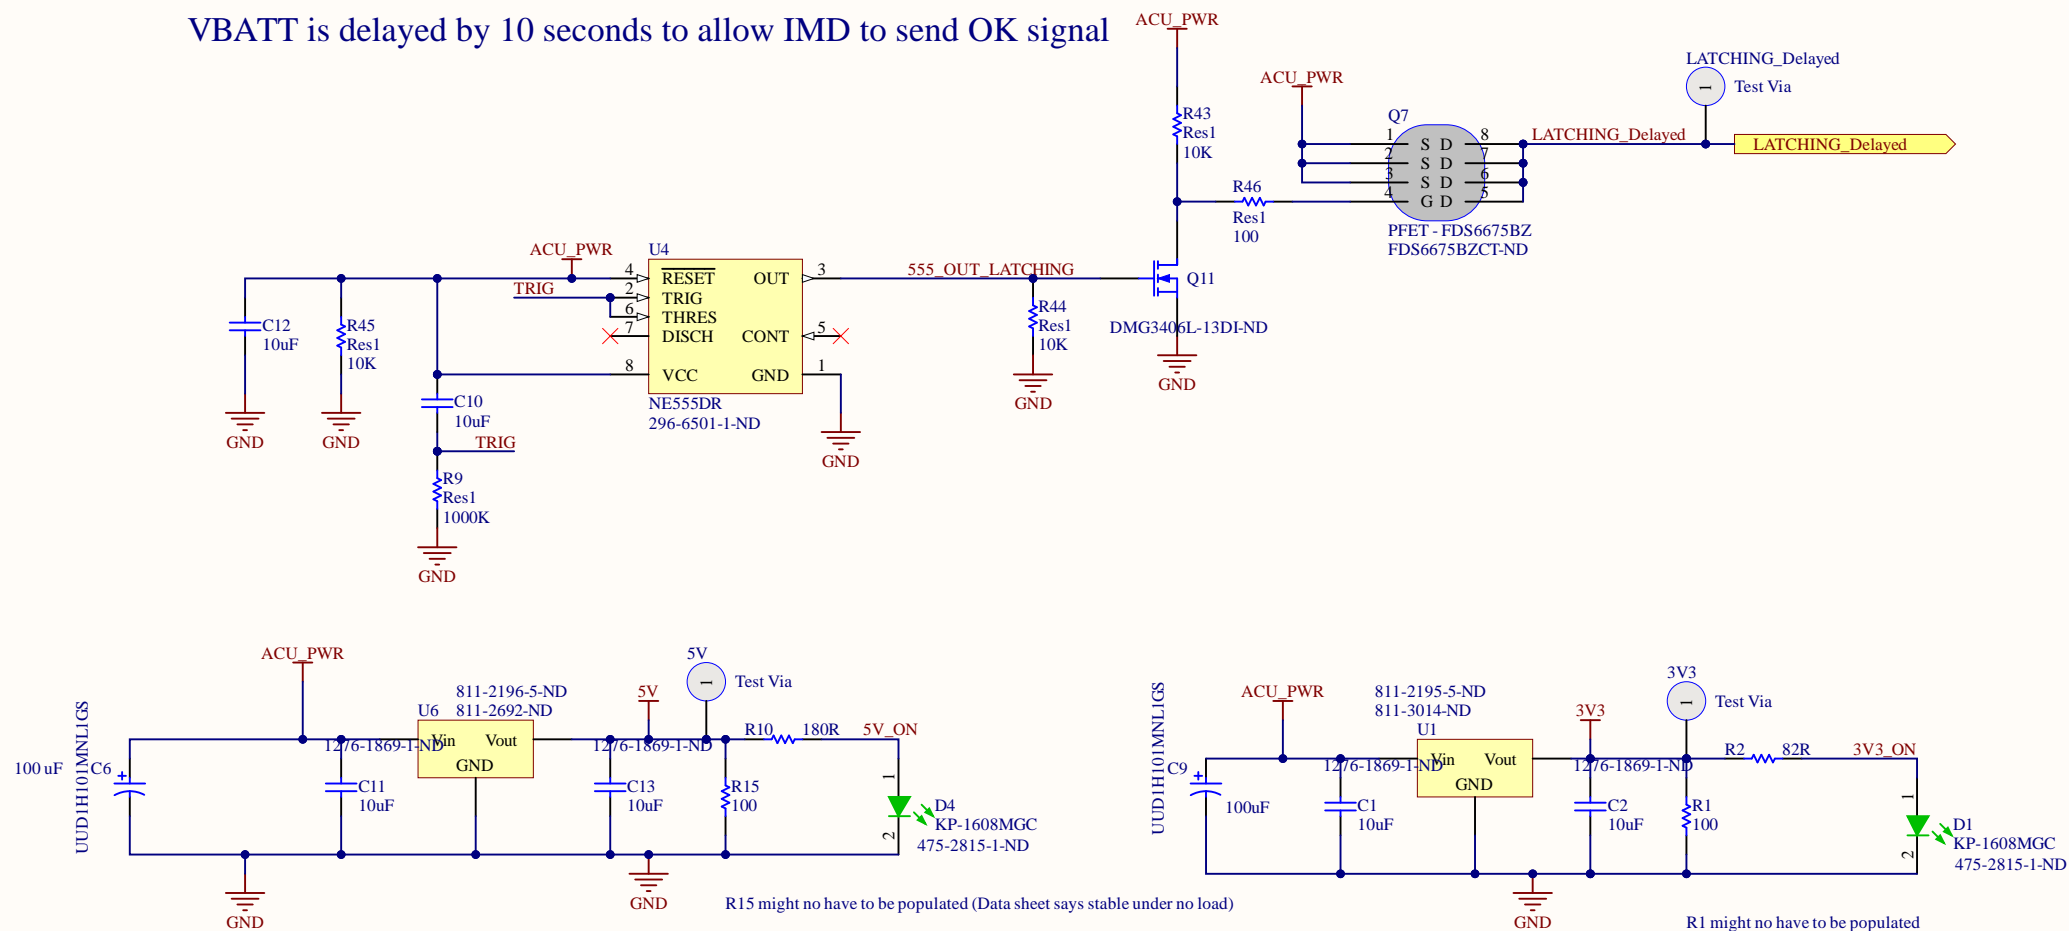

Title		
Size	Number	Revision
A4		
Date:	11-27-2021	Sheet of
File:	C:\Users\...\8 - Voltage Conversions Delay\Drawings	

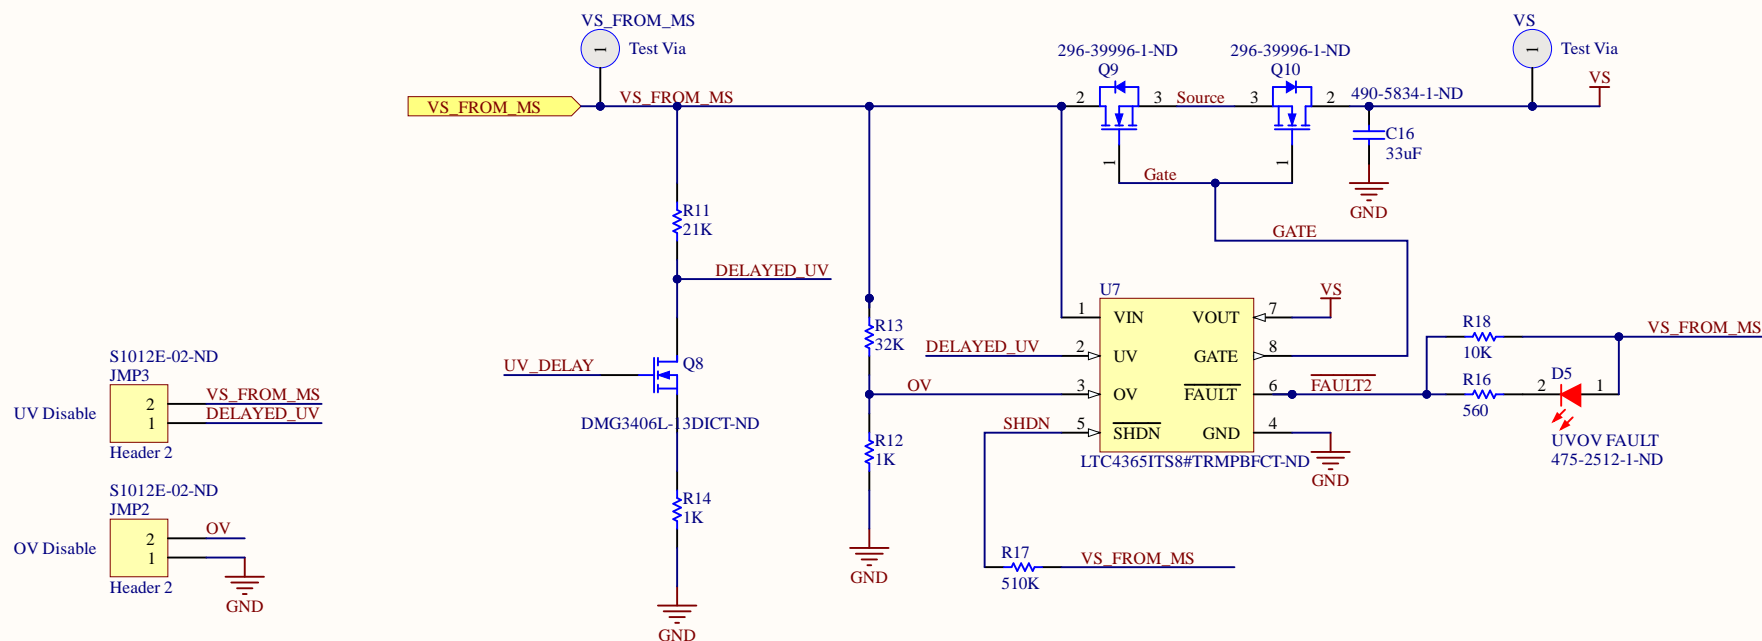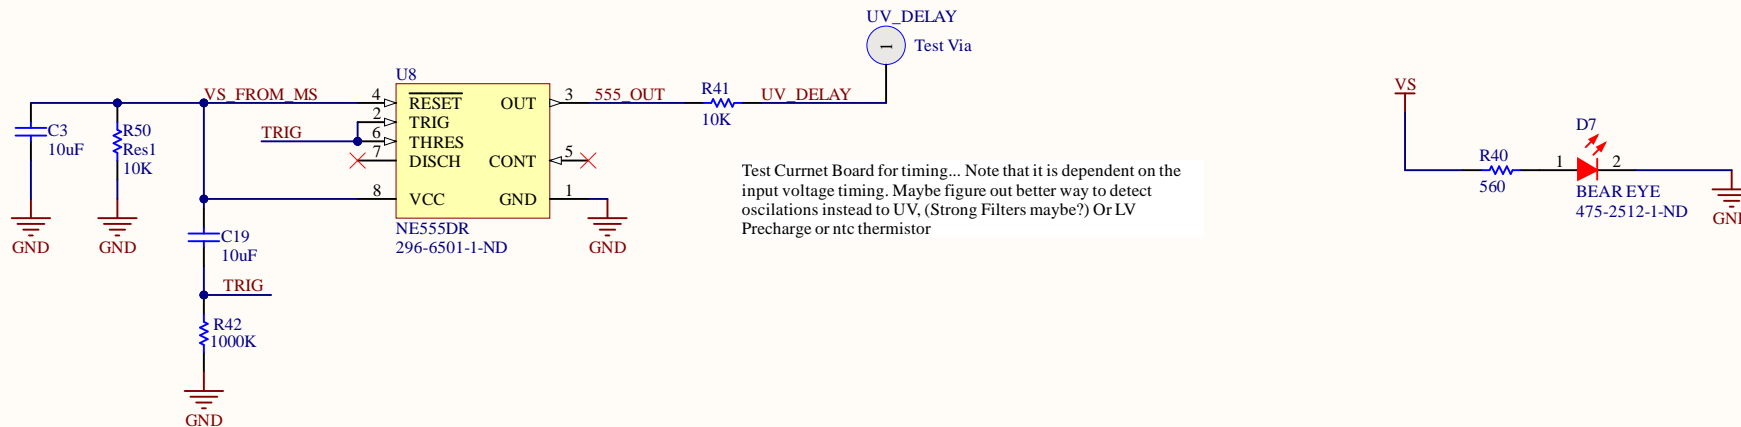

UV Disable
S1012E-02-ND
JMP3
Header 2
VS_FROM_MS
DELAYED_UV

OV Disable
S1012E-02-ND
JMP2
Header 2
OV
GND

S9337-ND
Jumper2
Jumper
S9337-ND
Jumper3
Jumper

Title		
Size	Number	Revision
A4		
Date:	11-27-2021	Sheet of
File:	C:\Users\...\9 - UV OV Protection.SchDoc Drawn By:	