





1

2

3

4

A

A

B

B

C

C

D
















D

ACU\_PWR

Test Via

ACU\_PWR

ACU\_PWR

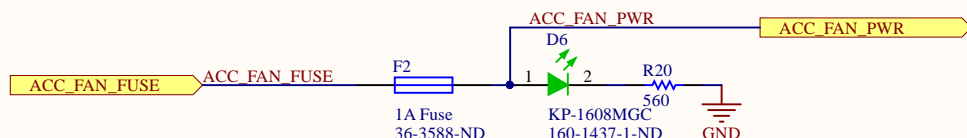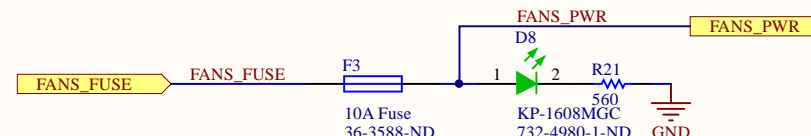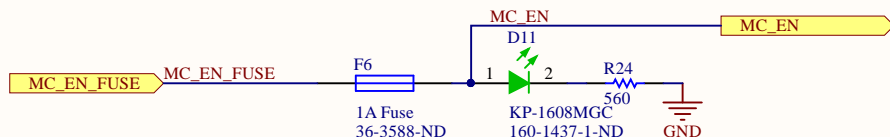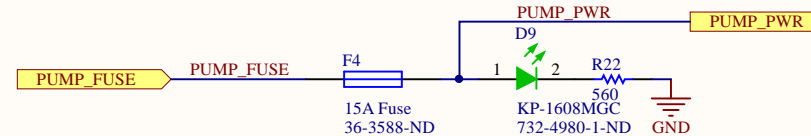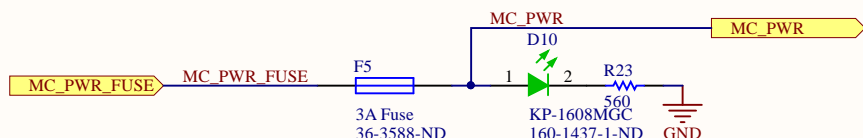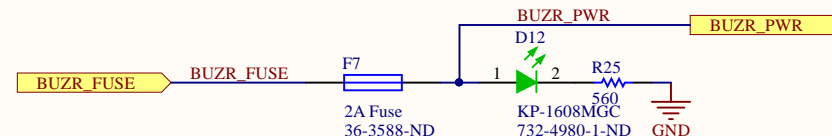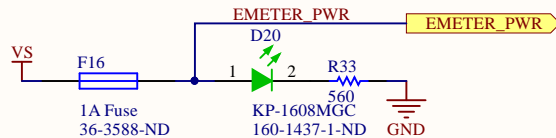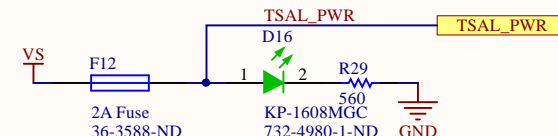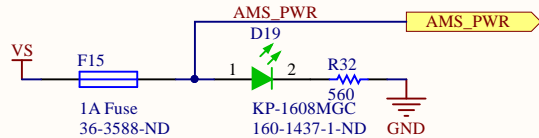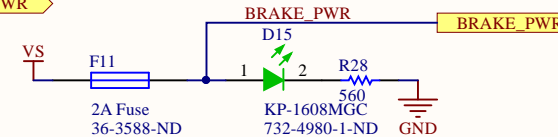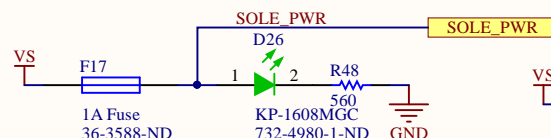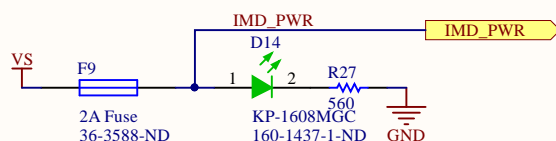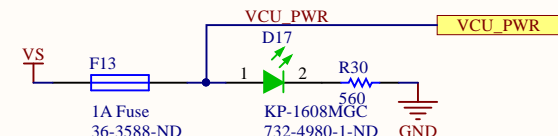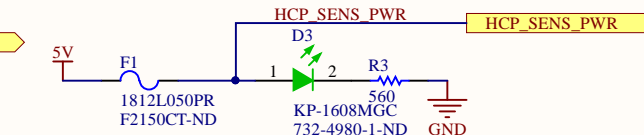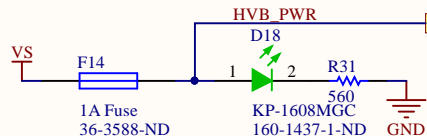



Title		
Size	Number	Revision
A4		
Date:	2019-11-08	Sheet of
File:	C:\Users\...\3 - Fuses.SchDoc	Drawn By:

1

2


3

4

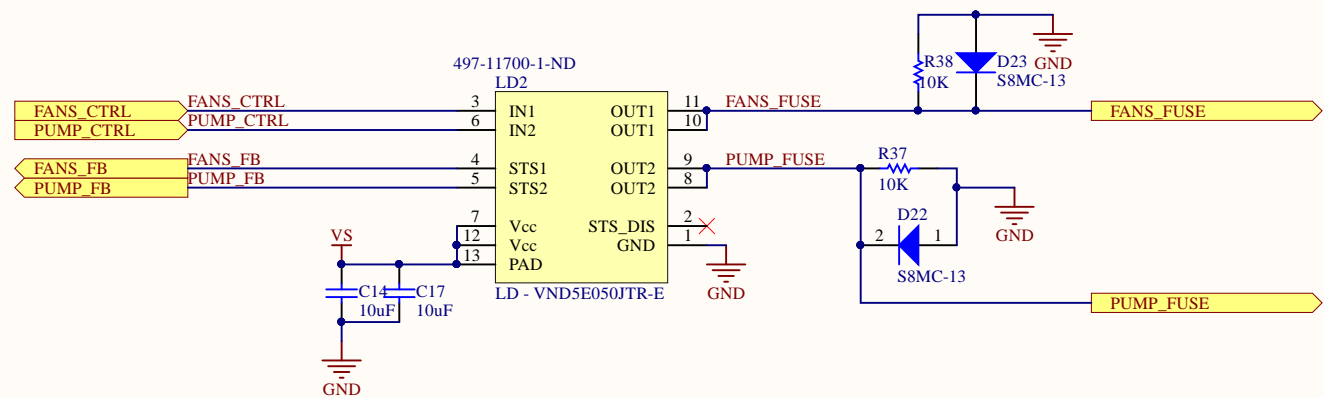
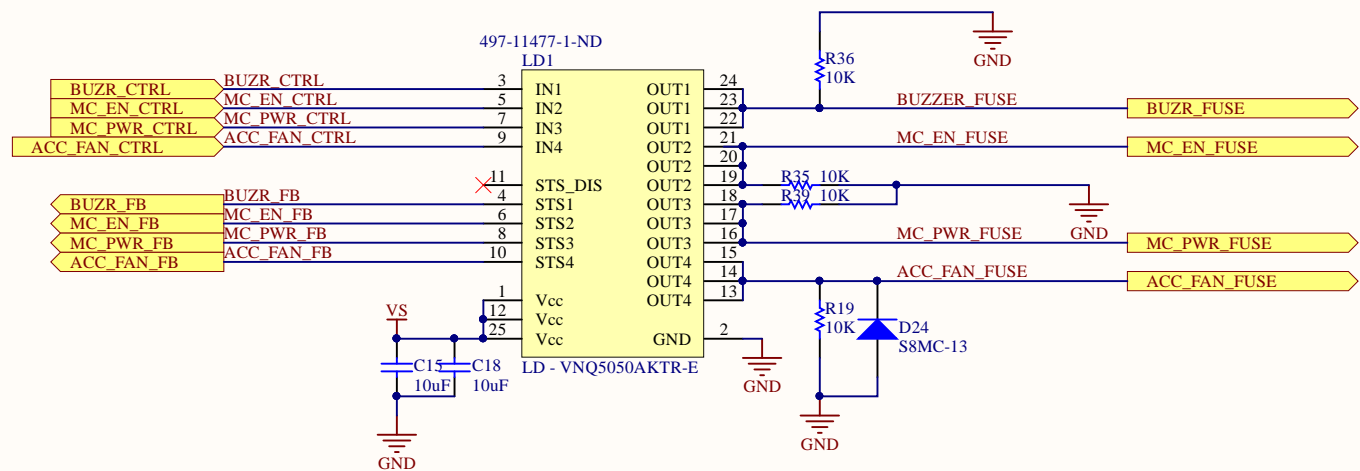



Title			
Size	Number		Revision
A4			
Date:	2019-11-08	Sheet	of
File:	C:\Users\...\6 - Load Drivers.SchDoc		Drawn By:

VBATT is delayed by 10 seconds to allow IMD to send OK signal

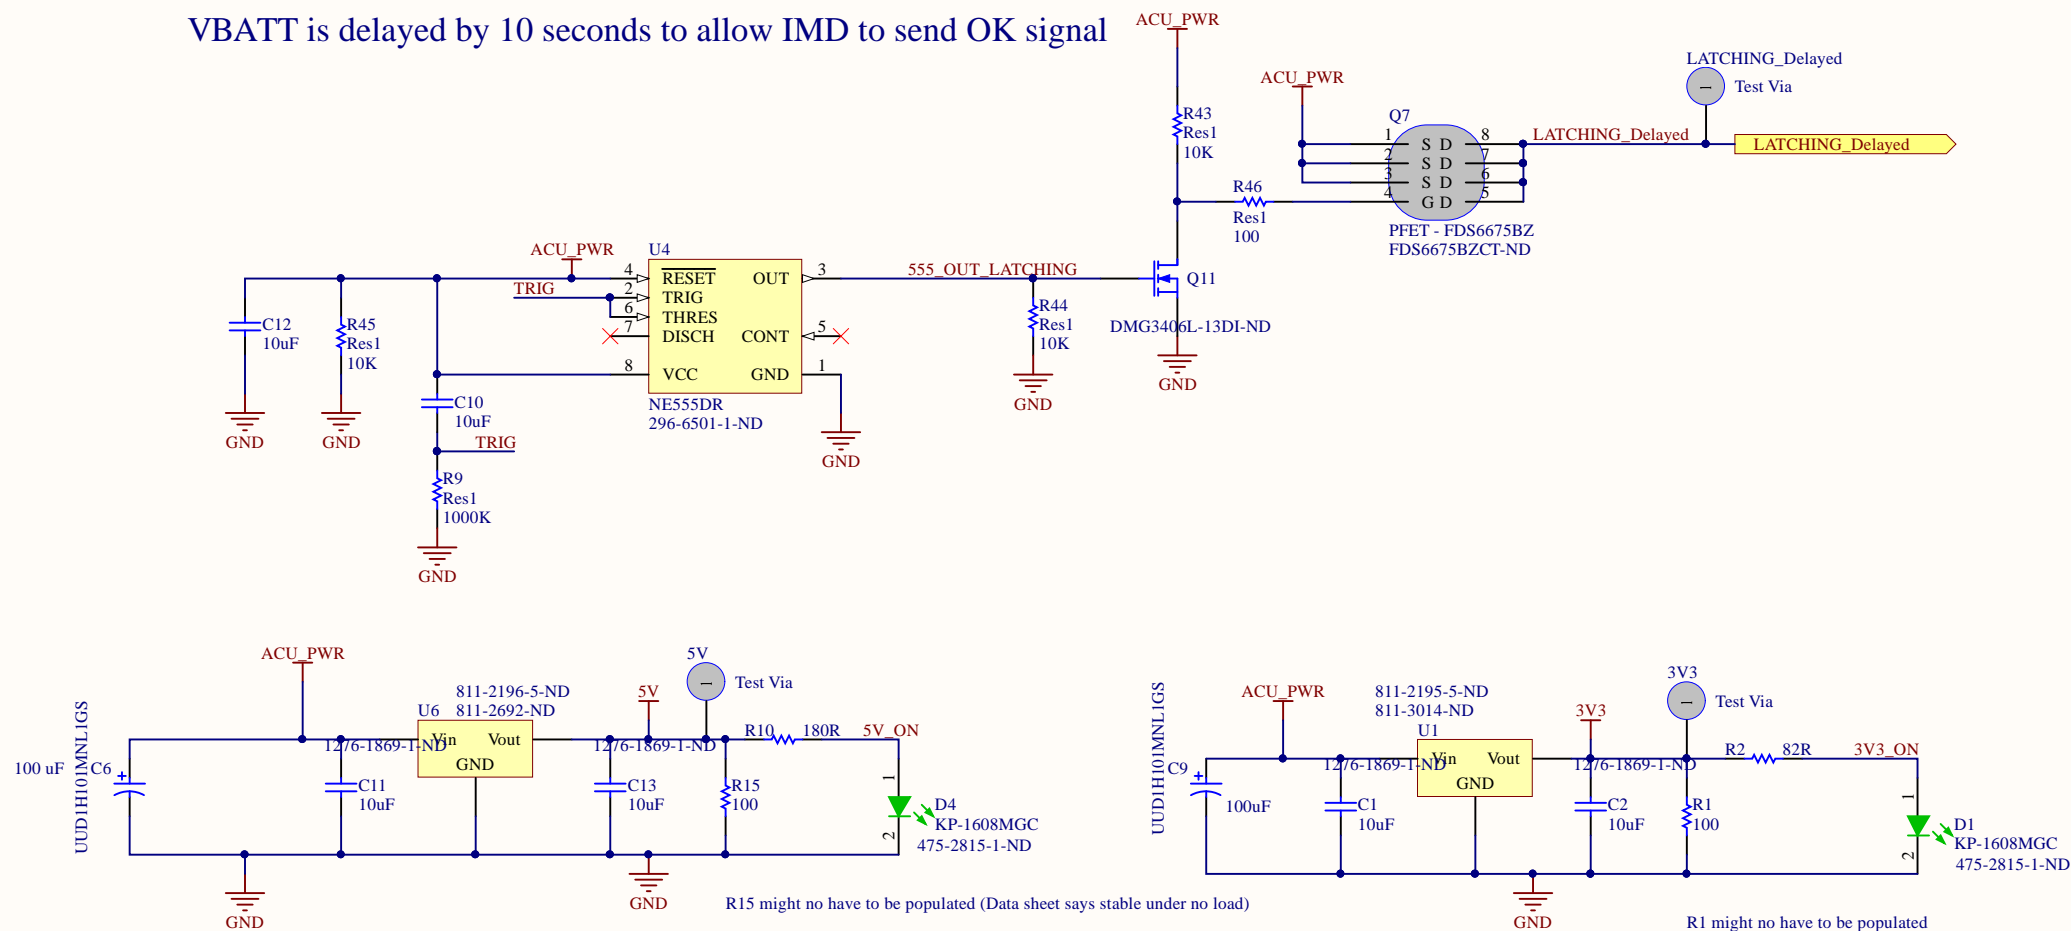

Title		
Size	Number	Revision
A4		
Date:	2019-11-08	Sheet of
File:	C:\Users\...8 - Voltage Conversions Delayed.SchDoc	

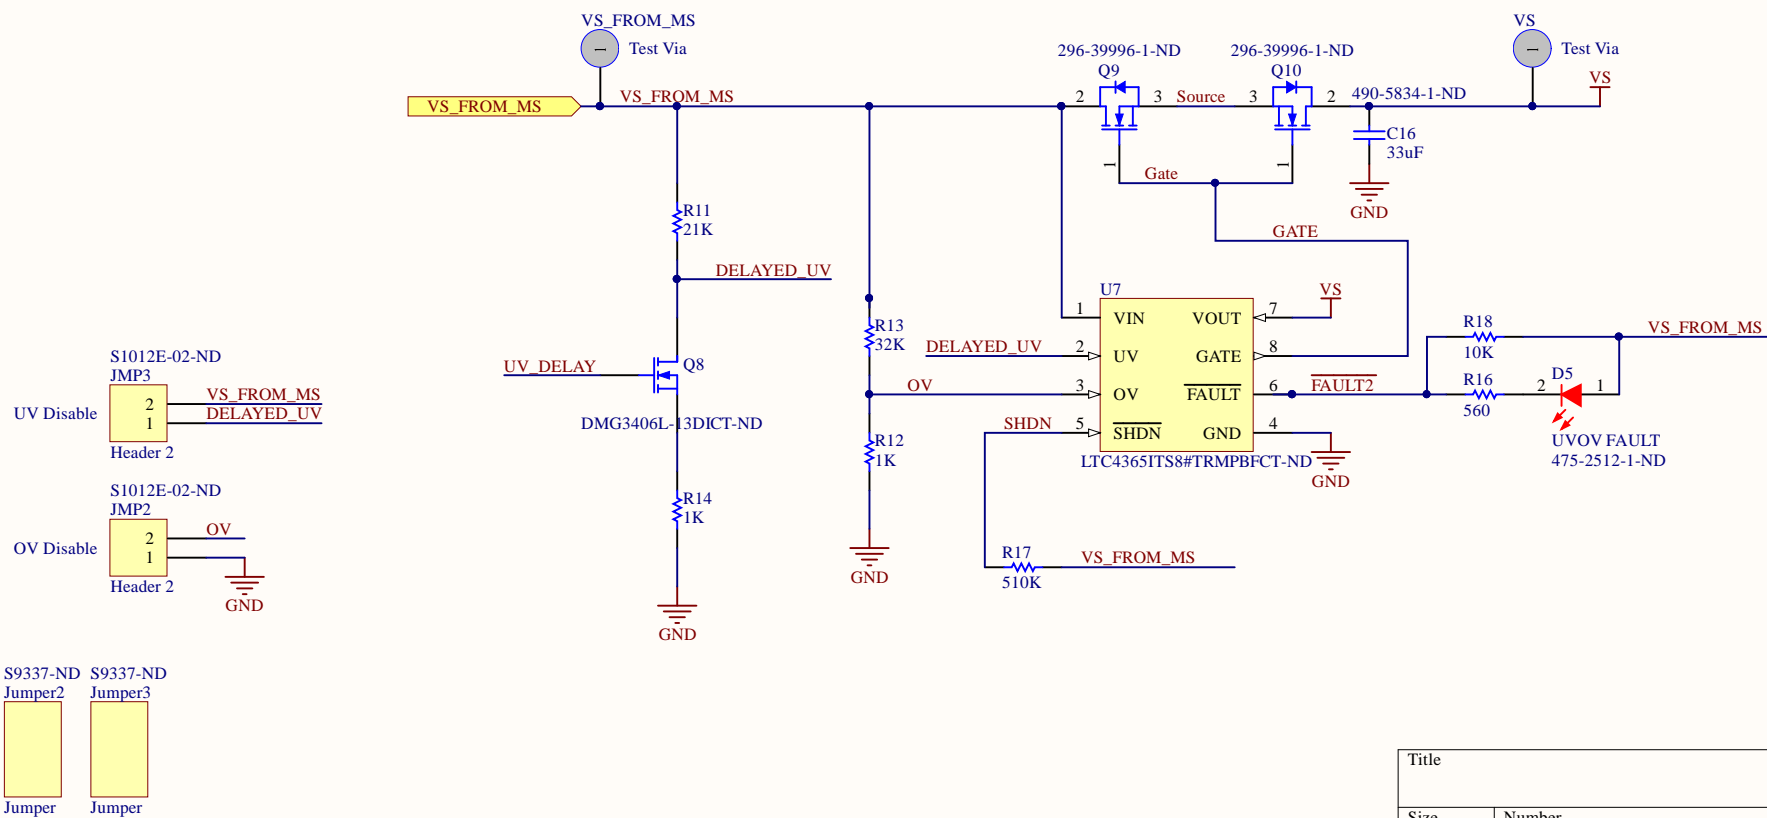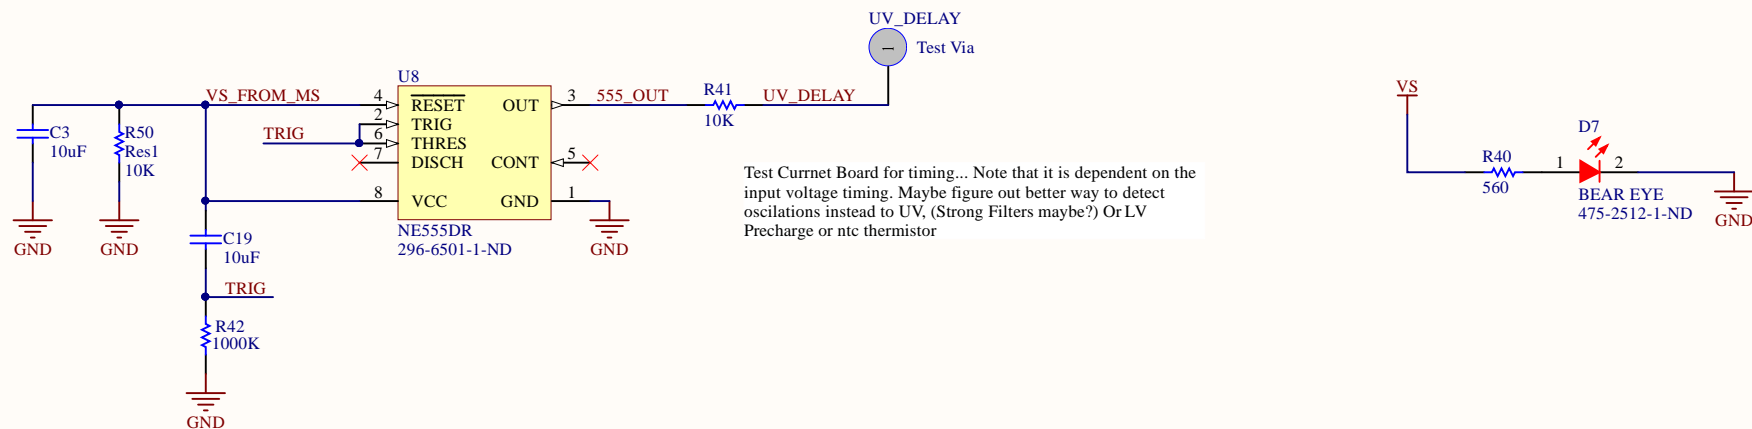

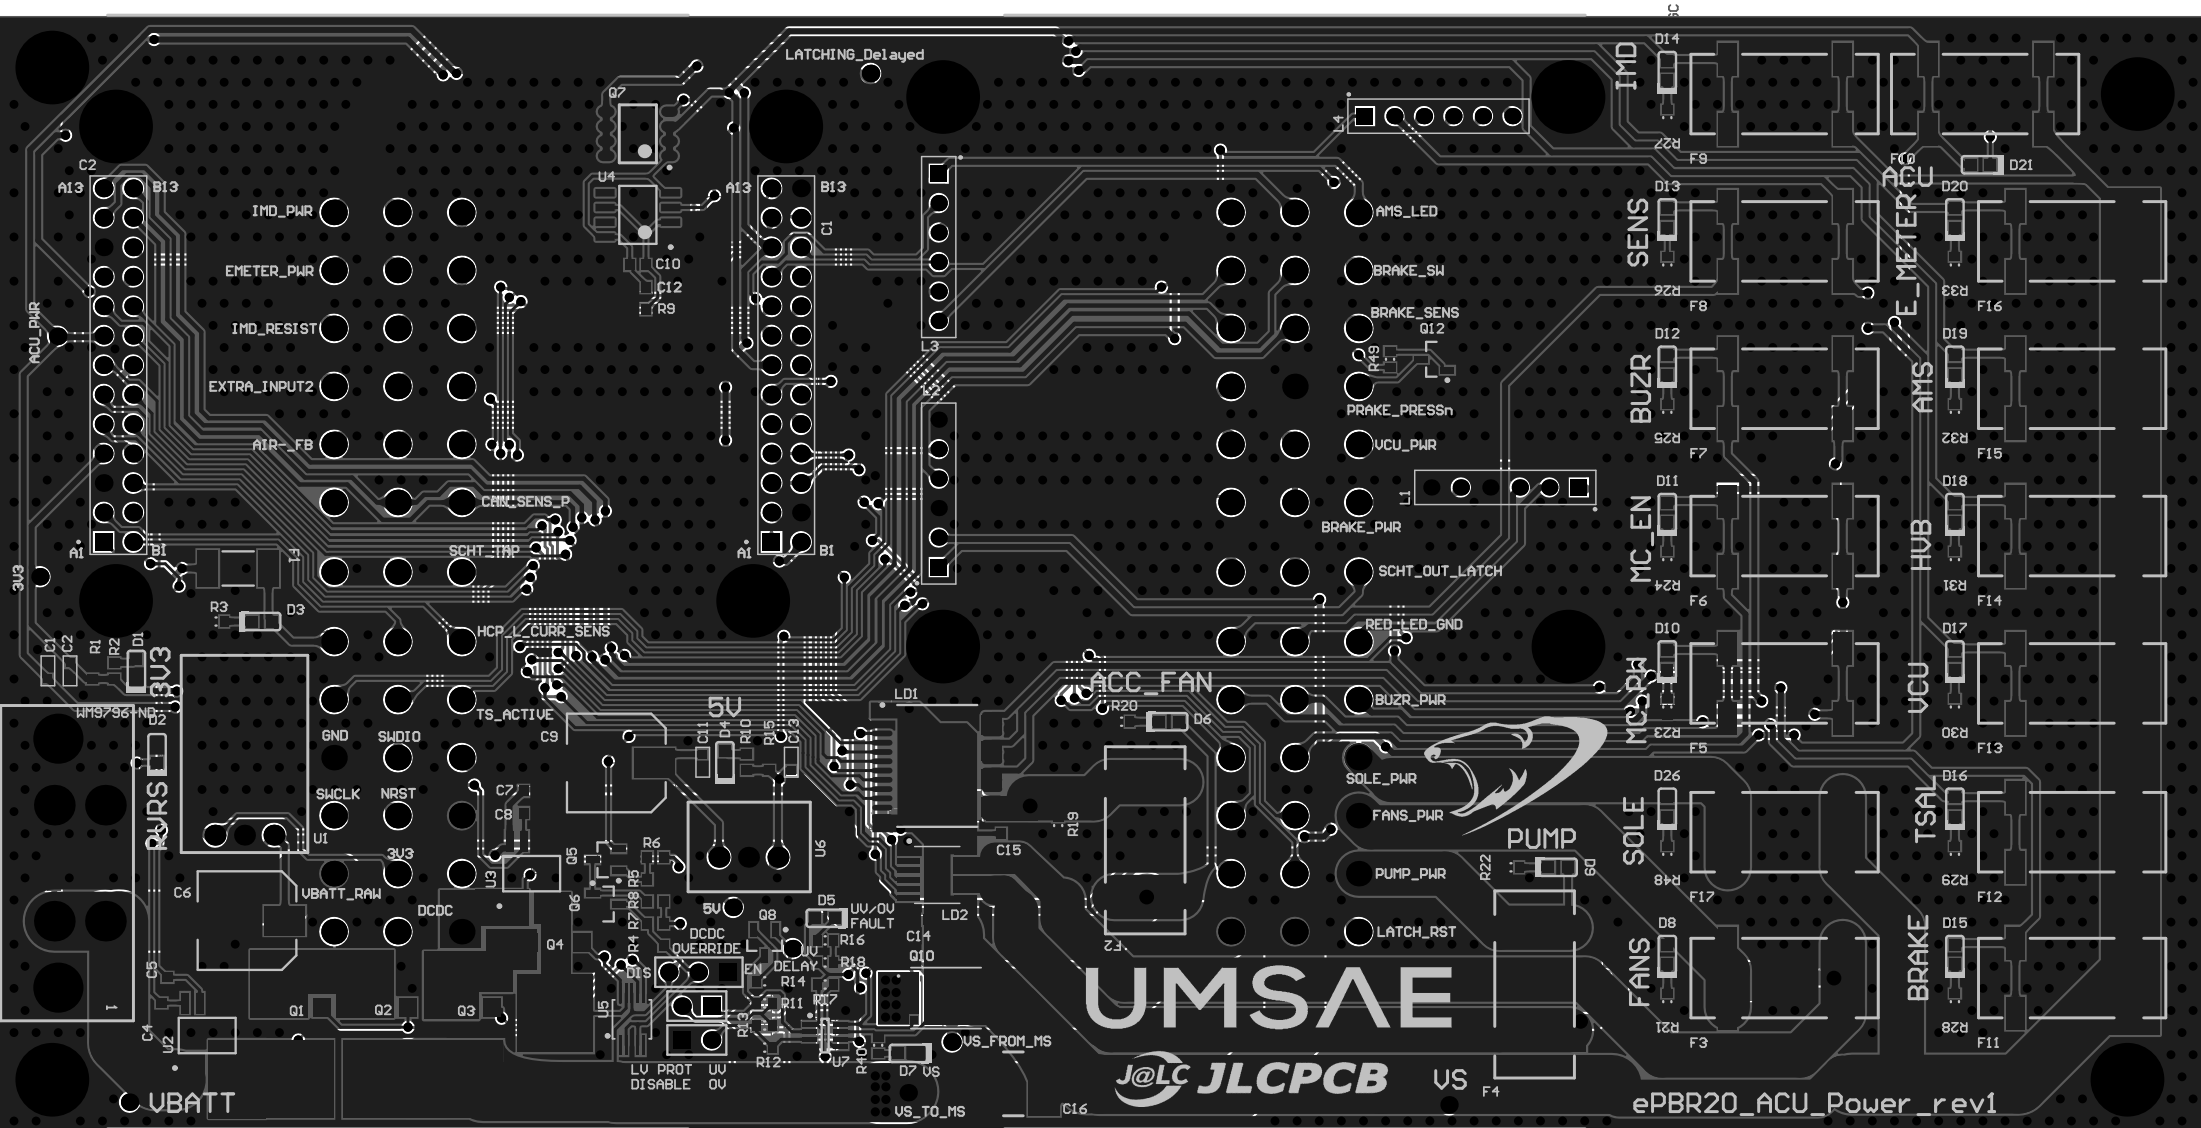

UMSAE

J@LC JLCPCB

ePBR20\_ACU\_Power\_rev1