

-
-
-
-
-

Chapter 11

Drinks Transport Planning Overview



Introduction

For many companies, transport related costs form a significant portion of the total distribution budget. Increases in efficiency and reductions in costs due to effective planning and management of the transport department can have a real effect on a company's profits.

To optimise the utilisation of transport resources and to optimise load fill, accurate information must be made available to the transport department as early as possible in the delivery cycle. This enables efficient scheduling of deliveries in the short term as well as assisting strategic Drinks Transport Planning in the longer term.

Drinks Transport Planning provides a wide spectrum of facilities for the planning and day-to-day management of transportation.

Together with the appropriate Drinks Distribution modules, it provides the comprehensive solution for companies managing their own fleet and those using third party carriers or a combination of both.

General Concepts

There are four basic ways that deliveries can be achieved:-

- Own transport facility.
- Third party transport.
- Parcel service.
- Collection by customer.

Whichever method, or combination of methods is utilised, the following operational steps may be taken to plan the necessary transport.

- Build loads.
- Assign transport resource.
- Manage movements.
- Consign loads.

Walkthrough

The following steps highlight the way to integrate Sales Order Processing and Drinks Transport Planning to progress an order from its creation right through to its delivery.

- Place an order via Sales Order Processing.
- Allocate Stock (either automatically on order, or using Manual Allocation) via Sales Order Processing.
- Start the Drinks Transport Planning subsystems (so that orders appear in Drinks Transport Planning).
- Create Loads via Transport Planning.

- Build and Maintain Loads (as appropriate) via Drinks Transport Planning Processing to place orders on particular loads.
- Produce Pick Lists either via Drinks Transport Planning (for Bulk Picks) or via Sales Order Processing (for either Bulk or Individual Picks).
- Confirm Assembly by Pick Note or Bulk Pick List via Sales Order Processing.
- Optionally, confirm despatch via Drinks Transport Planning.
- Confirm Delivery by Load via Sales Order Processing.

Building Loads

When loads are being planned, be it for own transport or third party carrier, decisions regarding giving extra discount or promising a delivery date and time, may depend upon access to the current situation of the loads to the customer's area.

When items are planned on a load, a number of factors will contribute to the decision making. These factors fall into three categories:-

- Customer.
- Product.
- Vehicle.

Customer Factors

- Geographical position.
- Limits on vehicles accepted.
- Limits on container types accepted.
- Carriers accepted.
- Days of the week.
- Times of the day.
- Authorisation required for delivery.
- Exclusive deliveries.

Product Factors

- Temperature control.
- Security.

Vehicle Factors

- Maximum capacity (weight, volume, number of containers).
- Driver restrictions (HGV required etc.).
- Availability of vehicle and driver.

There is a requirement for a continuous view of the forward delivery load. The forward view should present the requirements in the appropriate units (weight, volume, number of containers) by:

Transport centre / date / time / route / vehicle type restriction.

Typically, the day before despatch (or same day) the load is finalised, the vehicle and carrier are assigned. The picking and preparation documents can then be issued.

Assign Transport Resource

This procedure obviously differs for companies using their own transport from those using third party. Using third party it is a matter of notifying the carrier of the following:-

- Vehicle requirements.
- Loading date, time and place.
- Drops.
- Required delivery dates and times.
- Weights / volume / number of containers per load.
- Product details.

The rates may then be agreed as part of the confirmation. Typically, this is a specific confirmation of a long standing agreement based on rate tables supplied by the carrier, allowing transport costs to be accurately calculated, accrued and matched to carrier invoices.

For companies using their own transport facilities it is necessary, having determined the requirements, to assign a vehicle and driver. There is a continuous review of the despatch requirements to maximise utilisation and minimise the number of part loads sent out.

Manage Movements

This includes all the tasks necessary to get the goods on the right vehicle at the right time and in the most efficient manner. This includes the production of any necessary paperwork:-

- Picking notes.
- Delivery notes.
- Load sheets.
- Bills of lading (consignment notes).
- Invoices.

The important fact here is that the load is picked as a consignment.

There can be different requirements for confirmation of the different movements, but normally document confirmation with exception is used. In the case of despatch notes, a 'clean' document may be printed prior to the load being consigned to the carrier (particularly when third party carriers are used).

Consign Loads

Once loaded, the final transport details are confirmed prior to despatch. These include:-

- Carrier used.
- Weight/volume/number of containers.

- Date and time of despatch.
- Vehicle and driver details.
- Driver instructions.
- Security details.
- Thermostat settings (for chilled and frozen compartments).

The latter three are particularly relevant for internal transport. Vehicle details normally include registrations, whilst drivers may be identified by a short name or employee number.

Security details may include a tag number, type and colour assigned to the vehicle at despatch.

The driver will normally sign a copy of the bill of lading to confirm acceptance of the load - i.e. the load has been consigned to the carrier.

Relationship to Other Modules

Drinks Transport Planning is a fully standardised Drinks module, and operates under the control of Module Manager.

Drinks Transport Planning is one of the group of advanced module modules which extend the functionality of base modules.

The modules which are pre-requisite for the operation of Drinks Transport Planning are:-

- Drinks Inventory Management.
- Drinks Sales Order Processing.

The module, however, is designed to be used in conjunction with, and enhance, the following modules:-

- Drinks Distribution Requirements Planning (DRP).
- Drinks EDI Application Interface.
- Drinks Telesales.
- Drinks Warehouse Management.
- Accounts Payable.

The DRP interface allows this module to plan transport for depot replenishment as well as for retail deliveries.

The EDI interface allows incoming sales orders received electronically to be made available for Drinks Transport Planning.

The ability to produce a consolidated pick per load (or route or carrier) is provided within Drinks Warehouse Management.

Module Configuration

As with all Drinks modules, Drinks Transport Planning can be operated for a number of companies.

Within each transport company, transport centres may be set up. These are defined by assigning a number of Inventory stockrooms to the transport centre. This allows the transport planner to manage transport on behalf of a number of physical depots.

The transport centre may also be associated with multiple sales companies, allowing the planner to manage transport across commercial companies or divisions within an organisation.

Maintenance of Reference Data

As this is an advanced application module of Drinks, much of the primary data has already been set up as part of the base modules. There is, however, additional information which must be entered in order to obtain the maximum benefit from the application.

There are a number of common features in the way in which this data is maintained. These are:-

- The module makes the maximum use of 'codes' and where they are employed a prompt is always available to assist in selecting the correct one.
- Selection is normally from a displayed list.

Information for the following may be maintained:

- Transport centres.
- Transport planners.
- Vehicle types.
- Routes.
- Route nodes.
- Carriers.
- Carrier rates.
- Areas (zones).
- Delivery profiles.

Additional defaults are also maintained per transport company. The most important of these being the point at which the transport requirements are first created within this module from Sales Order Processing:

1. Immediately after taking orders, *or*
2. On allocating stock, *or*
3. On creating a picking note, *or*
4. On confirmation of delivery.



Note: Drinks is structured to allow the picking of planned loads, which therefore requires that transport defaults are created at allocation stage (option 2).

Transport Centres

A transport centre represents a delivery depot, where transport loads are planned, picked and despatched.

In Drinks this is defined by associating one or more stockrooms with the transport centre in the Drinks Transport Planning module.

These stockrooms may span more than one sales company, allowing multi-company planning of transport for despatches.

A number of control flags are maintained per transport centre which condition the processing of loads:-

Add Orders Immediately to Load

If set to 'yes' and a suitable load is found, i.e. same route, date, transport centre and vehicle type. If sufficient capacity is available, the module automatically adds the order to this load when the transport requirements are created.

In effect, the module builds the loads, provided that the load headers are set-up in advance by the planner, by-passing the load build screen.

If set to 'no' and a suitable load is found then this load number is suggested to the planner when s/he uses the load build screen.

In either case, if no suitable load is found, the suggested load is blank and the planner must create a suitable load and then add the order to this load by using the Build Loads Screen.

Release Loads Before Goods Ready

Transport Planning maintains a running total of orders per load and checks the ready flag within Drinks Sales Order Processing against the order in Transport Planning.



Note: If this flag is set to 'no', the Transport Planning does not allow loads to be released for printing of documentation unless these totals tally.

Print BoL / Load Sheets Immediately After Load Released

Indicates that Load Sheets and Bill of Lading documentation should be printed immediately as loads are released via Load Maintenance, and not via the Print Load option.



Note: Care must be taken with the setting of this field in conjunction with the next, 'Bypass Confirm Despatch', and the use of Load Rating. If neither Rating nor 'Confirm Despatch' are being used, this field should be set to No ('0') - otherwise, when the load is released, the Load Status skips all settings (Rating and Confirmation) through to Awaiting History. A load at this setting is NOT recognised in Drinks Sales Order Processing for picking.

Bypass Confirm Load Despatch

If set to 'no', each load must be confirmed as despatched individually via the screen function.

This date and time stamps the load on departing the depot.

Load Numbers

A sequential range of load numbers may be maintained per transport centre with a user-defined prefix.

Alternatively, a single range may be maintained per transport company.

When creating new loads, the automatically assigned load number may be overtyped.

Transport Planners

For security reasons each user of the Drinks Transport Planning module must be defined as a transport planner.

This allows a user ID to be authorised to one or more transport centres. He/she is allocated a default centre which the module automatically logs them into. The centre description is shown at the top of all screens.

A planner may change to any other transport centre by using the appropriate menu option. He/she is presented with a list of centres that are authorised to them.

The following control flags are maintained per planner:-

Release Load

Set to 'yes' ('1') to allow the planner to release loads for printing of documentation and processing.

Override Capacity Errors

Set to 'yes' ('1') to allow the planner to build loads over the capacities defined to the vehicle type.

Routes and Nodes

Routes must be maintained which represent a journey between two geographical locations, undertaken by at least one carrier (internal or external).

The route is defined by a code, description and optionally an origin and destination.

If specified, the origin and destination must be defined to the module as nodes, i.e. geographical start and end points for the route. The origin and destination will be the same if the journey starts and ends at the same location.

A default carrier and/or ship time and/or vehicle type may be maintained for the route. On creating a load for this route, these defaults will be added to the load.

Bills of lading are normally required for routes covered by external carriers (for internal fleet a load sheet is normally sufficient). The requirement for a BoL, its format and number of copies are maintained per route.



Note: The default route and drop sequence are then associated with delivery points via Delivery Profile Maintenance in this module.

Vehicle Types

These can be (optionally) maintained if capacity checking is required or if analysis by vehicle type is considered important.

A vehicle type code and description is held, together with a maximum weight and/or maximum volume load capacity assigned to it.

If a vehicle type is assigned to a load, the module will output an error if any specified capacity is exceeded.

Carriers

Carriers must be maintained, whether internal or external, by associating a code and name, as well as an address, with each carrier.

The following details may also be maintained for each carrier:

Carrier Type

User defined in the Drinks Inventory Management Descriptions file.

Contact Name

For information only.

Phone & Fax Number

For information only.

- Rating Required
- Rate Method

Rate Code

For external carriers in particular. The parameters to 'rate the load', i.e. calculate transport charges, are specified here.

These may be overridden once a load has been created.

Carrier Routes

If validation of carrier route combinations is required, then the routes each carrier covers are defined here, together with any route specific rating parameters.

Text

Any carrier specific details may be maintained for the transport planners information.

Carrier Rates

If rating of loads, i.e. calculation of carrier freight charges, is to be performed by this module then sets of rates must be maintained (and associated with carriers).

Each set of rates is associated with a code and also an expiry date. Future rates may be set up to be used automatically when current rates expire.

Four methods of rating are available:-

1. A charge based on the load gross weight, maintained in a table.

A surcharge value or percentage may be specified on top of this table value to accommodate unforeseen charges (e.g. government fuel tax increase).

A fixed rate per drop is also applied, with a minimum/maximum drop charge for the whole load.

A minimum load charge is used if the final value is less.

2. The same as for 1, except that the charge is based on the gross weight of each drop.

3. A charge based on the gross weight dropped into each area contained in the load.

For each area the following are maintained:-

- Fixed charge per unit of weight.
- Surcharge value or percentage.
- Drop minimum charge.
- Drop maximum charge.
- Area minimum charge.

4. As for 3, except that the charge per area is not fixed but maintained in a table based on gross weight.



Note: Each of the rating methods may be based on load volume or total number of containers rather than load gross weight.

Areas

Areas may be defined by a code and description to allow the grouping of load drops into areas (or zones).

The area code is then assigned to the appropriate delivery points, allowing load documentation and rating to be split by area.

Delivery Profiles

Each customer delivery point to be considered must have a delivery profile set-up for it.

The following details are maintained:-

- Default Route.
- Default Drop.

Default Carrier

These details are defaulted and recorded against each order for this delivery point.

Area

The area or zone used for splitting the drops for documentation and rating purposes.

Customer Exclusive Load

If set to 'yes', the module will ensure that any load built for this customer will not contain orders for other customers (based on the eight character customer account and three character delivery sequence).

Delivery Confirmation

If set to 'yes', the processing screens will indicate to the planner that this delivery point requires confirmation of a delivery slot at the customer's depot before the load can be released.

Delivery Days / Times


The days of the week and times within each day, when the customer accepts deliveries. (Used for memo purposes only in Drinks Transport Planning). In Drinks Sales Order Processing allocations and Drinks Telesales, entry in these fields will set the delivery date to the next acceptable delivery day in specific circumstances.

Text

Any text relevant to the transport planner may be maintained against the delivery point (for internal purposes only).

Processing

The business processes are best represented by the following flow diagram.

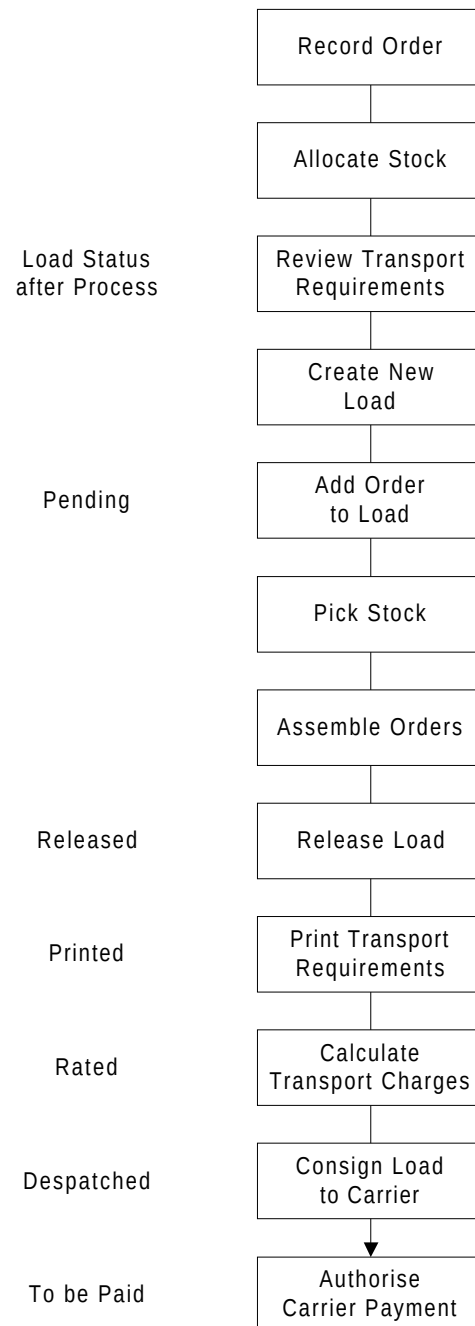

However, the full flexibility of Drinks Transport Planning requires further explanation.

The transport requirements of orders may be transferred from any Drinks Sales Order Processing option immediately after taking the order, on allocation of stock, creation of pick notes or on confirmation of despatch. Any under/over pick

or despatch confirmation will be automatically reflected in Drinks Transport Planning.

The building of loads may be automated, if required, for specific transport centres. The transport planner need only create the pending load headers in advance, and the module will then add the appropriate orders (up to any specified maximum capacities defined for the vehicle type).

The consignment of loads to the carrier may be done manually, via the confirm load despatch screen, or automatically after printing (and rating where appropriate) the load.

The matching and authorisation of carrier invoices is only required where the load has been previously rated.

At the appropriate point, the load is closed and copied to history for future analysis.

Review Transport Requirements

In Drinks Transport Planning, the Load Build Screen presents the planner with all the information necessary to best assemble orders onto loads.

Once an order has been recorded, the following details are made available via the Load Build screen:

- Gross weight.
- Volume.
- Number of containers.
- Sourcing stockroom.
- Default route and drop sequence.
- Default carrier.
- Default vehicle type.
- Ship date and time.
- Customer's name and account.
- Suggested load number (if any).

Easy access is also provided via the following functions to provide more detail for the load planner:

- Pending loads prompt (i.e. loads not yet released).
- Load details enquiry.
- Order enquiry.
- Delivery profile enquiry.

The planner's attention is brought to orders having fixed or special instructions by a flashing asterisk against an order which has external text recorded against it.

Also, an asterisk is displayed against the customer if there are any delivery restrictions.

The order may then be selected to display either the Order Enquiry or Delivery Profile Enquiry respectively.

Create New Load

New load headers may be created individually on line or en masse via a batch function.

The module can automatically generate load numbers or they may be manually controlled.

The minimum amount of information required is a valid route code and ship date.

'Skeleton' load headers may be set up to represent a standard journey and the relevant one copied each time a load is created.

A load header may be created 'in flight' during load building if it has not been set up in advance.

Add Orders to Load

In the Load Build Screen, the planner may select a number of orders to be added to a new or existing load.

If a vehicle type has been specified, then the module will check that its' capacity has not been exceeded.

Facilities are provided to move the order to alternative routes and/or to re-sequence the drops.

On adding orders to loads they are automatically removed as a requirement from the Load Build Screen.

Release Load

Prior to releasing a load any final amendments are made to drops via the Load Maintenance Screen. Also, any driver, vehicle registration or security seal details may be assigned to the load.

On releasing a load, the necessary transport documentation can be printed immediately or the next time a print run is selected.

Once released a load is no longer available for planning. Its status must be returned back to 'pending' by the planner for any details to be amended prior to the load being consigned to the carrier.

Print Transport Documents

Load sheets, and optionally bills of lading, are printed for each released load. These are described in detail in the Documents section of this overview.

Details of the route, drop and load are printed on each pick/despatch note in Drinks Sales Order Processing, and the notes may be generated for a specific carrier, route or load.

If Drinks Warehouse Management is installed, facilities are provided to produce consolidated pick lists for the warehouse personnel to efficiently pick for loading of vehicles.

Calculate Transport Charges

Function is provided within Drinks Transport Planning to calculate the expected carrier charge for selected loads.

The calculations are based on the following parameters:-

- Charge per capacity unit (gross weight, volume, containers).

- Penalty charge (If below specified minimum).
- Charge per drop.
- Minimum drop charge.
- Maximum drop charge.
- Surcharge value/percentage.
- Minimum charge per area.
- Maximum charge per area.
- Minimum charge per load.

The charge rates (per unit or per drop) may be maintained as a fixed amount or in a table based on weight, volume or number of containers.

Four methods of automatic calculation are available (which can each be based on volume or number of containers rather than gross weight):-

- A charge based on the load gross weight, maintained in a table;
- A load charge based on the sum of drop charges which in turn are based on drop gross weight, maintained in a table;
- A charge based on a fixed unit rate multiplied by the gross weight dropped into each area (zone) contained in the load;
- As above except that the charge per area is based on a table of gross weight ranges, rather than a fixed rate.



*Note: Posting of Carrier Charges to Accounts
Payable has to be performed manually.*

Consign Load to Carrier

An option is provided for each load to be confirmed as despatched to ensure that it is date and time stamped on leaving the depot.

This stage may be bypassed allowing the load to be automatically consigned once the load sheet has been printed.

Authorise Carrier Payment

On receiving a carrier invoice it may be matched against the calculated charge for one or more loads.

If there is a discrepancy then only authorised users can authorise the payment.

Enquiries

Enquiries can be grouped into one of three categories:

- Planning.
- Static information.
- Status.

More simply, these can be regarded as:

- What is to be done?
- What are the parameters?
- Where are things?

Planning Enquiries

The 'Outstanding Loads Enquiry' displays all orders yet to be included on loads which satisfy the selection criteria.

This can also provide visibility of the future outstanding requirements for planning of transport, as a range of dates may be selected.

Static Information

Enquiry screens are available for the following:-

- Carrier details.
- Carrier/route restrictions.
- Delivery profile details.
- Delivery time slots.

Status Enquiries

Load enquiry screens are provided as follows:-

- Pending loads (i.e. list of loads not yet released).
- Load details (load header information).
- Load drops (all drop details for selected load).
- Load orders (all orders for selected load).
- Load consignee (consignee details for selected load).
- Load totals (quantity/value totals for selected load).

The 'Loads by Order' enquiry allows the current status of an order to be viewed i.e. which load(s), if any, it is assigned to. Direct access to the above load enquiries is provided by selecting one of these loads.

Reports

As part of the general policy before a report is run, selection and sequencing parameters are available.

In general, standard reports are printed on standard listing with 132 print positions and 6 lines to the inch.

All reports are printed with the procedure or program number in the top left and the page number and date of run in the top right of the report.

Planning / Status Reports

The 'Load Status' report provides a summary per date/route of the total capacity requirements of outstanding orders together with a view of any current loads. From this report, the planner can quickly establish which routes are under/over committed prior to building loads on the screen.

The 'Outstanding Orders' report provides details of all orders yet to be included on loads, sequenced by route/drop within date. This provides the planner with detailed capacity requirements which is of particular use where an over commitment has been identified on the 'Load Status' report.

The 'Load Details' report details all the drops and orders for selected loads.

Documents

Print and reprint facilities are available for two documents:

Load Sheets

These are printed for all released loads. The load sheet provides a list of all drops to be undertaken for each load selected (in ascending or descending drop sequence).

It serves three major purposes:

- as a marshalling document for all despatch notes included on the load sheet, particularly if the notes are from more than one stockroom.
- as an aid to loading the vehicle in the 'best' sequence for dropping.
- to be taken by the driver as an action and confirmation list.

Bills of Lading (BoL)

This is a more formal document than the load sheet and is normally produced only for selected external carriers.

The BoL is printed in any one of four formats:

- One BoL is printed per load
 - One totals line
 - List of despatch note numbers
- One BoL per drop/delivery point
 - One totals line
 - List of despatch note numbers

- One BoL per load
 - One totals line per drop
 - List of despatch note numbers per drop
- One BoL per load
 - One totals line per area
 - List of all despatch note numbers on the load

Pre-requisites

Modules

For the basic operation of the Drinks Transport Planning module, the following modules must be installed:

- System Manager.
- Drinks Inventory Management.
- Drinks Sales Order Processing.

The following additional modules make up the full complement of order capture modules which provide an interface into Drinks Transport Planning:-

- Drinks Distribution Requirements Planning (DRP) - for distribution orders.
- Drinks EDI Application Interface.
- Drinks Telesales.
- Drinks Warehouse Management.

The following financial modules provide for a full level of financial integration:

- Accounts Payable.
- General Ledger.

Data

Items

All items to be processed by Drinks Transport Planning must be defined to an associated sales/inventory stock holding company.

Customers

All delivery points to be processed by Drinks Transport Planning must be defined to an associated sales company.

Drinks Transport Planning Configuration

Data Considerations

The following data entities need to be considered during data set-up:

- Transport descriptions in Inventory.
- Company profile.
- Transport centres.
- Planners.
- Areas.
- Routes and nodes.
- Vehicle types.
- Carriers.
- Items.
- Delivery profiles.

Transport Descriptions File Entries

To enable the normal processing of the modules, there are some entries which need to be defined to the Inventory descriptions file.



Note: The Drinks Transport Planning descriptions file entries are maintained in Drinks Inventory Management under the 'Default Sales Company' defined to the Transport company profile. This enables the definition of a Transport company that need not be an existing Inventory or Sales company.

The following Description Identity Codes must be present:

CODE	DESCRIPTION
@STD	Container Headings
*STD	Container Columns
TPAR	Adjustment reason
TPBL	Bill of lading format
TPCC	Commodity code
TPCT	Carrier type
TPCY	County
TPDC	Capacity
TPIC	Creation of transport req.
TPLS	Load status
TPPM	Freight payment method
TPRM	Rating method
TPSE	Serious errors
RSNC	Reason code
TTYP	Text type
USGC	Text usage code

Low Level Codes



Note: System defined codes affect the operation of the software. They are 'recognised' by the programs. Additional codes or changes to the meaning of the standard codes supplied will require modification of the software.

With the description identity codes, various low level codes must be defined:

@STD = Container Headings (default - Code Length = 1)

There should be seven entries which have the seven categories into which the container summary will show during Build Loads. The actual codes are unimportant, but, for simplicity, use the values 1 through 7.

The description should be an abbreviated 4 character name. The limit field must contain one of the column numbers, 1 through 7.

For example:

Code	Description	Limit	
1	Kegs	1	(Kegs)
2	Case	2	(Cases)
3	Crte	3	(Crates)
4	Clnd	4	(Cylinders)
5	Palt	5	(Pallets)
6	Bott	6	(Bottles)
7	Othr	7	(Other)

***STD = Container Columns (default - Code Length = 2)**

These entries define which of the seven columns in Build Loads are shown by the Container Count. An entry is needed for each container type with the column number, 1 through 7, specified in the Limit field.

The container types are those product item classes 'PCLS', allocated to describe types of containers, and established on the Item Master for each container item.

For example:

Code	Description	Limit	
CA	Case	2	(The Case column on @STD)
CN	Cans	7	(The Other column on @STD)

@xxx = Container Headings for a Transport Centre

***xxx = Container Columns for a Transport Centre**

Using these two description entries, it is possible to specify a different structure of Container Summary in Build Loads for a specific Transport Centre, rather than using the default structure specified by @STD and *STD. The code xxx is a Transport Centre, defined under Transport Centre Maintenance.

Overrides can be specified for any Transport Centre - those not defined in this way, using the default structures.

The format and requirements of these entries is the same as for the default set.



Note: If the Transport Centre is to be used in conjunction with Container Columns in the Build Loads function, the Centre cannot be more than 3 characters long. Please refer to Processing, Build Loads - Order Selection for further details.



Note: Transport Centres can be 4 positions long. This feature is only available for Transport Centre codes of 3 characters or less. A

Transport Centre code of 'STD' will always use the company defaults.

TPBL = Bill of lading format (code length = 2)



Note: This is system defined, but you may change the description.

- 01 - One document per load.
- 02 - Document per drop/delivery point.
- 03 - One document with drop details.
- 04 - One document details by area.

TPDC = Capacity (code length = 1)



Note: This is system defined, but you may change the descriptions.

- 1 = Weight.
- 2 = Volume.
- 3 = Containers.

TPIC = Creation of transport req. (code length = 1)



Note: This is system defined, but you may change the descriptions.

- 1 - Order.
- 2 - Allocation.
- 3 - Picking note create.
- 6 - Confirm assembly.

TPLS = Load status (code length = 2)



Note: This is system defined, but you may change the descriptions.

- 10 - Pending (on hold, being planned).
- 20 - A'printing (awaiting printing or released).
- 30 - Allocated (not used).
- 40 - On pick (not used).
- 50 - Picked (not used).
- 60 - A'rating (awaiting rating).
- 70 - A'COD (awaiting confirmation of load despatch).
- 80 - A'auth.pay (awaiting payment authorisation).
- 90 - Completed.
- 95 - A'hist (awaiting drop to history).
- 99 - Cancelled.

TPRM = Rating method (code length = 2)



Note: This is system defined, but you may change the descriptions.

01 - Load and rate table.

02 - Drop and rate table.

03 - Area.

04 - Area and rate table.

TPSE = Serious errors (code length = 2)



Note: This is system defined, but you may change the descriptions.

01 - Sales order not found.

02 - Pick note header not found.

03 - Item record not found.

04 - Stockroom balance not found.

05 - Route specified not found.

06 - Time out for requirements update.

08 - Details changed after override.

09 - Global route change warning.

10 - Possible capacity problems.

TTYP = Text type (code length = 1)



Note: This is system defined, but you may change the descriptions.

K - Carrier.

C - Customer.

O - Order.

T - Transport load.

USGC = Text usage (code length = 1)



Note: This is system defined, but you may change the descriptions.

I - Internal.

P - Planner.

E - External.

Text type / usage combinations

KI - Internal carrier text.

CP - Planner customer text.

OE - External order text.

TE - External transport load text.

Company Profile

The Transport company profile defines a number of primary defaults. The following issues should be considered:

- When should transport requirements initially be received from Sales Order Processing?
- Should transport load references be created at company or transport centre level?
- What are the significant decimal places for capacity types i.e. weight, volume and number of containers?
- Order planning level i.e. header or line detail. This determines if the stockroom code at header or line level is used to determine the transport centre into which the order line requirements are to be placed.

Transport Centres

Transport centres define a delivery depot that will process order requirements and loads. The following issues should be considered:

- How many transport centres should be defined for the company?
- How many inventory stockrooms should be associated with each centre?
- Should these centres span sales companies i.e. allowing multiple company planning by a single centre?
- What is the default capacity type for the centre (weight, volume or number of containers) to be shown on panels when first displayed?
- Should requirements be assigned to loads on initial creation i.e. bypassing manual load build and allowing the system to automatically add them to suitable loads?
- Should loads be available for release prior to all the orders assigned to the load being flagged as ready?
- Should transport documentation be printed on-line on releasing the load?
- Is confirm of load despatch required?

Planners

All users must have a planner profile defined. The following issues should be considered:

- Should planners be authorised to plan loads across a number of transport centres?
- What level of authorisation should be assigned i.e. release loads, capacity overrides, payment/adjustment authorisation?

Areas

Areas or zones need to be defined for the purpose of rating and documentation. Consideration should be given as to how these areas are to relate to a transport centre i.e. geographical location or a radial pattern.

Routes & Nodes

All routes must be defined to the module together with optional start and end points. The following issues should be considered:

- Are internal or external carriers associated with routes?
- Are vehicle types a factor, i.e. do certain vehicle types run on particular routes?
- Are origins and destinations applicable i.e. movement between two locations rather than a circular trip back to the transport centre?
- Is formal documentation required for each route, i.e. a bill of lading, or is a load sheet sufficient?

Vehicle Types

Vehicle types need only be defined if analysis of transport requirements against vehicle capacities is required. The following issues should be considered:

- Internal and/or external types (as defined by carriers).
- Are discrete weight and volume capacities important (these may be set as infinite requiring manual review/control of load capacities)?

Carrier Types

All carriers must be defined to the module. The following issues should be considered:

- Internal transport or external carrier services.
- Is rating applicable?
- Are there any carrier route and/or rating restrictions?

Carrier Rates

Carrier rates need only be defined if calculation of transport charges is applicable for the business. This is generally only a feature of external transport of goods and rates will generally be communicated on a contract basis via the carrier. The following issues should be considered:

- Which of the four methods are appropriate?
- How many rate codes/effectivity dates are to be defined?



Note: Potentially a large amount of data may be required.

Items

These details are maintained in Drinks Inventory. Tare weights may be maintained against requirements but will not be assigned automatically as the requirement is added to the Transport Planning Module.

Delivery Profiles

All customer and distribution centre delivery points must be defined to the module. The following issues should be considered:

- Route and drop sequence.
- Default carrier.
- Exclusivity of loads to the customer.
- Delivery confirmation and time slots requirements.

Installing Application Manager PTF's

Application Manager PTF's must be restored and installed as QSECOFR.



Note: To install the Application Manager PTF's the system must be in a minimum state (that is with no users or subsystems / jobs running - this is important)

Use a normal User ID to create the state then sign off and sign on as QSECOFR.

At the first screen, add in library OSLPTP1 (ADDLIB OSLPTP1 *FIRST)

Type in MNGPTF and install the PTF as normal.

Once installed, the library and PTF object can only be removed by QSECOFR. Install this PTF then sign off and sign back in as PTFOwner for subsequent PTF's.

If the above is NOT done, PTFOwner, being inside Application manager, will say the AM PTF is installed when it has not, as PTFOwner is using one of the objects the PTF requires, and the system will work - but will NOT have been updated.