


BASIC SPECIFICATION

- PCB TO BE FABRICATED IN ACCORDANCE WITH IPC-6012 CLASS 2.
- BOARD VIEWED FROM PRIMARY SIDE (LAYER 1).
- REFER TO LAYER STACK-UP FOR CU THICKNESS.
- FULL NET LIST ELECTRICAL TEST REQUIRED.
- BOARD MATERIAL: 370HR OR EQUIVALENT.
- ALL MATERIAL SHALL BE ROHS COMPLIANT.
- ALL MATERIAL SHALL MEET UL 94V-0 FLAMMABILITY RATING.
- ALL MATERIAL SHALL BE LEAD FREE COMPATIBLE.
- SOLDERMASKS TO BE PHOTO-IMAGEABLE PLACED OVER BARE CU CONDUCTORS.
- PLATING FINISH: ELECTROLESS NICKEL: 3.0-6.0um,
IMMERSION GOLD: 0.075-0.125um.

DETAILED SPECIFICATION


- FLEX CONSTRUCTION.
- TOTAL CONDUCTIVE LAYERS = 2.
- MINIMUM SIGNAL TRACK WIDTH = 0.1MM.
- MINIMUM SIGNAL TRACK SPACING = 0.1MM.

DIMENSIONS

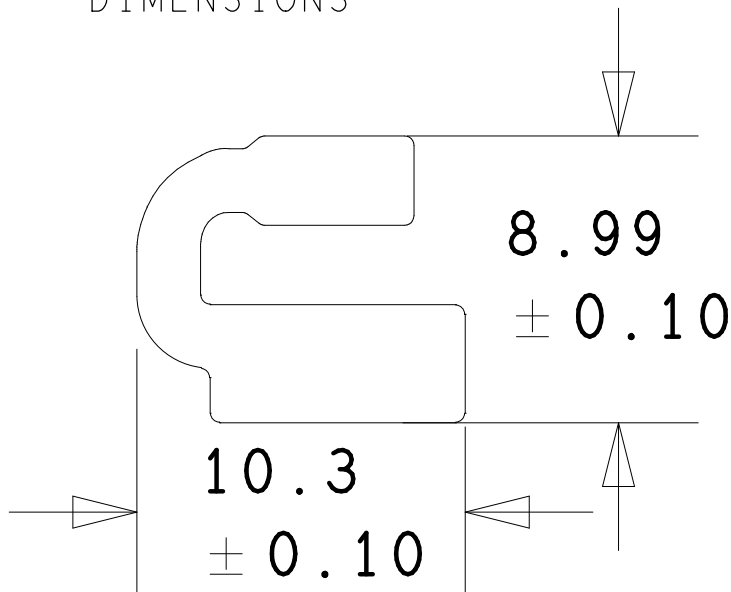


FOR DETAILED DIMENSIONS REFER TO GERBERS

STIFFENERS X 2

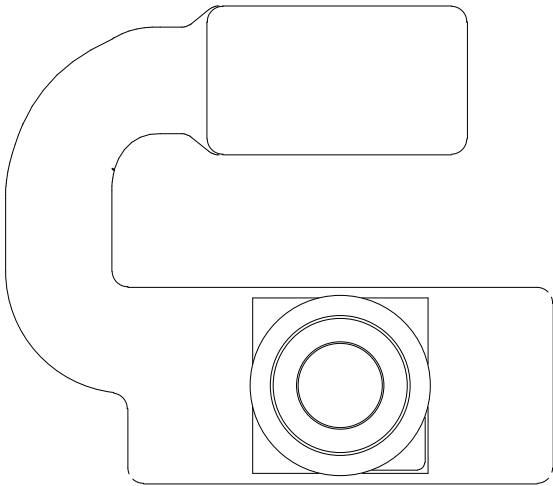

REFER TO STIFFENER DRAWING
513-0002-02

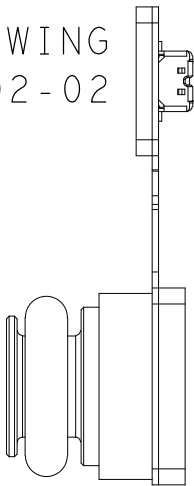

REFER TO STIFFENER DRAWING
513-0001-02

IMPEDANCE CONTROLLED NETS

NET	ROUTING SCHEME	TARGET IMPEDANCE
-----	----------------	------------------

COMPANY	UNA WATCH LTD		
	www.unawatch.com		
TITLE	UNAaltimeter_MS5837		
DRAWN BY	L . ALLISON		
SCALE: 1 TO 1	SHEET: 1 OF 1	SIZE: A2	