
REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1.0	First version of UNA_BODY_IHF	17-01-24	L.Allison
1.0	See Engineering Change Note 1	31-01-24	L.Allison


BASIC SPECIFICATION

1. PCB TO BE FABRICATED IN ACCORDANCE WITH IPC-6012 CLASS 2.
2. BOARD VIEWED FROM PRIMARY SIDE (LAYER 1).
3. REFER TO LAYER STACK-UP FOR CU THICKNESS.
4. FULL NET LIST ELECTRICAL TEST REQUIRED.
5. BOARD MATERIAL: 370HR OR EQUIVALENT.
6. ALL MATERIAL SHALL BE ROHS COMPLIANT.
7. ALL MATERIAL SHALL MEET UL 94V-0 FLAMMABILITY RATING.
8. ALL MATERIAL SHALL BE LEAD FREE COMPATIBLE.
9. SOLDERMASKS TO BE PHOTO-IMAGEABLE PLACED OVER BARE CU CONDUCTORS.
10. PLATING FINISH: ELECTROLESS NICKEL: 3.0-6.0um,
 IMMERSION GOLD: 0.075-0.125um.

DETAILED SPECIFICATION

1. TOTAL CONDUCTIVE LAYERS = 4.
2. OVERALL THICKNESS = 0.4MM +/- 5%.
3. MINIMUM SIGNAL TRACK WIDTH = 0.1MM.
4. MINIMUM SIGNAL TRACK SPACING = 0.1MM.
5. BOARD HAS MICROVIAS IN PADS ON L4.
7. L3-L4 MICROVIAS TO BE LASER DRILLED.
8. ALL MICROVIAS SHALL BE COPPER FILLED.
9. SOLDERMASK COLOUR = BLACK.



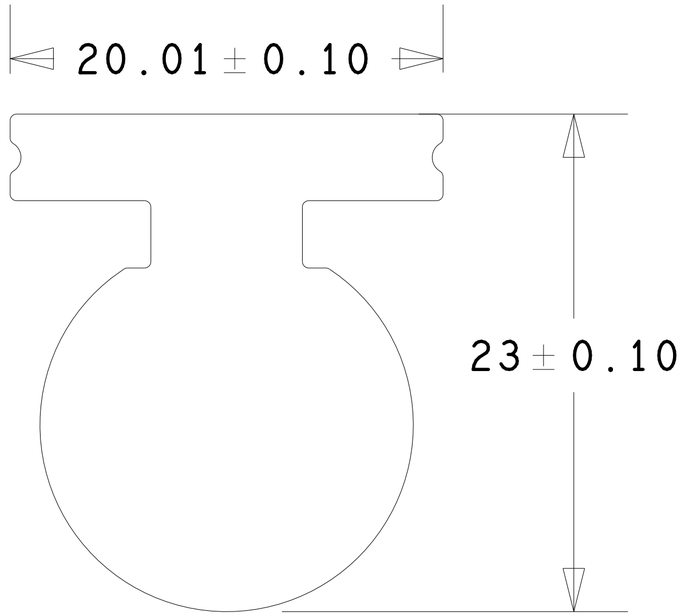

IMPEDANCE CONTROLLED NETS

NET	ROUTING SCHEME	TARGET IMPEDANCE

TITLE	UNA WATCH LTD www.unawatch.com
TITLE	UNA_BODY_IHF
DRAWN BY	L.ALLISON
SCALE: 1 TO 1	SHEET: 1 OF 1 / SIZE: A2