

22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

BASIC SPECIFICATION

- PCB TO BE FABRICATED IN ACCORDANCE WITH IPC-6012 CLASS 2.
- BOARD VIEWED FROM PRIMARY SIDE (LAYER 1).
- REFER TO LAYER STACK-UP FOR CU THICKNESS.
- FULL NET LIST ELECTRICAL TEST REQUIRED.
- BOARD MATERIAL: 370HR OR EQUIVALENT.
- ALL MATERIAL SHALL BE ROHS COMPLIANT.
- ALL MATERIAL SHALL MEET UL 94V-0 FLAMMABILITY RATING.
- ALL MATERIAL SHALL BE LEAD FREE COMPATIBLE.
- SOLDERMASKS TO BE PHOTO-IMAGEABLE PLACED OVER BARE CU CONDUCTORS.
- PLATING FINISH: ELECTROLESS NICKEL: 3.0-6.0um,
IMMERSION GOLD: 0.075-0.125um.


DETAILED SPECIFICATION

- RIGID-FLEX CONSTRUCTION.
- RIGID SECTION CONSISTS OF 4 LAYERS (L1-L4).
- FLEX SECTION CONSISTS OF 2 LAYERS (L2-L3).
- RIGID SECTION THICKNESS = 0.4MM +/- 5%.
- MINIMUM SIGNAL TRACK WIDTH = 0.1MM.
- MINIMUM SIGNAL TRACK SPACING = 0.1MM.
- RIGID SECTION HAS MICROVIAS IN PADS ON L1.
- L1-L2 MICROVIAS AND L2-L3 MICROVIAS TO BE LASER DRILLED.
- ALL MICROVIAS SHALL BE COPPER FILLED.
- SOLDERMASK COLOUR = BLACK.

IMPEDANCE CONTROLLED NETS

NET ROUTING SCHEME TARGET IMPEDANCE

BOARD DIMENSIONS

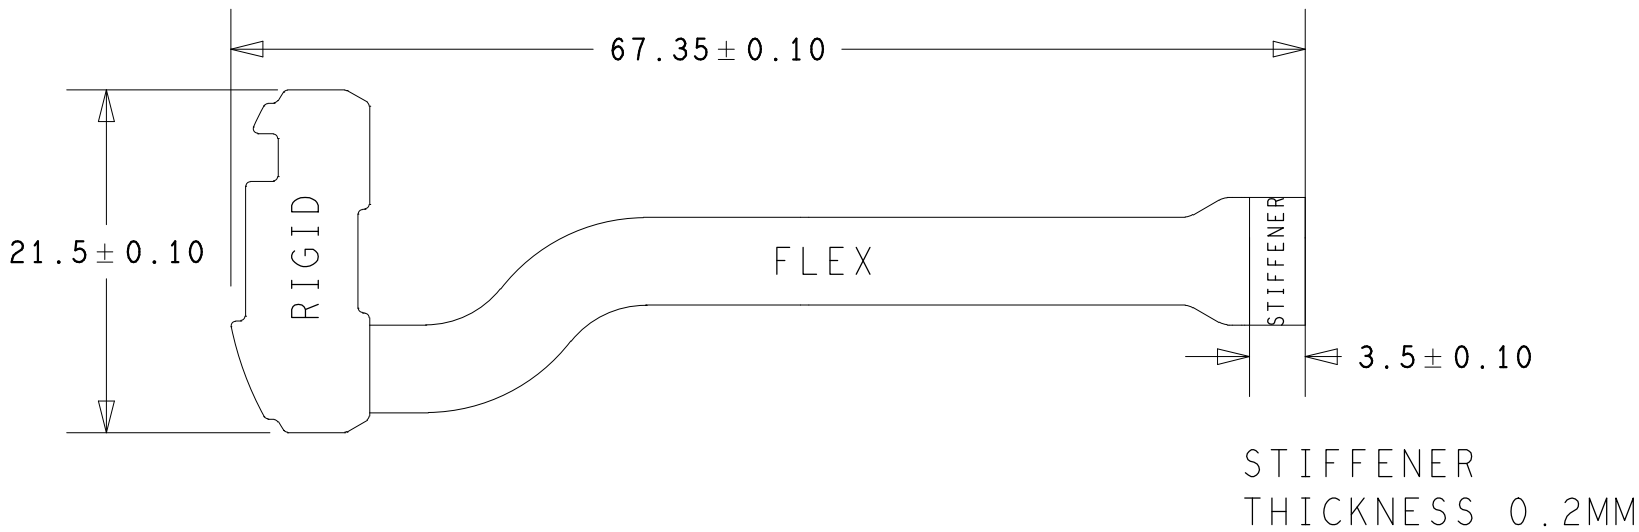

COMPANY	UNA WATCH LTD www.unawatch.com		
TITLE	UNAview_LS012		
DRAWN BY	L. ALLISON		
SCALE: 1 TO 1	SHEET: 1 OF 1	SIZE: A2	

22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1