


PINOUT

DevLab: I2C FT24C32A EEPROM Module

Top view

I²C Address Selection via DIP Switch

A0	A1	A2	ADDR
0	0	0	0X50
0	0	1	0X54
0	1	0	0X52
0	1	1	0X56
1	0	0	0X51
1	0	1	0X55
1	1	0	0X53
1	1	1	0X57

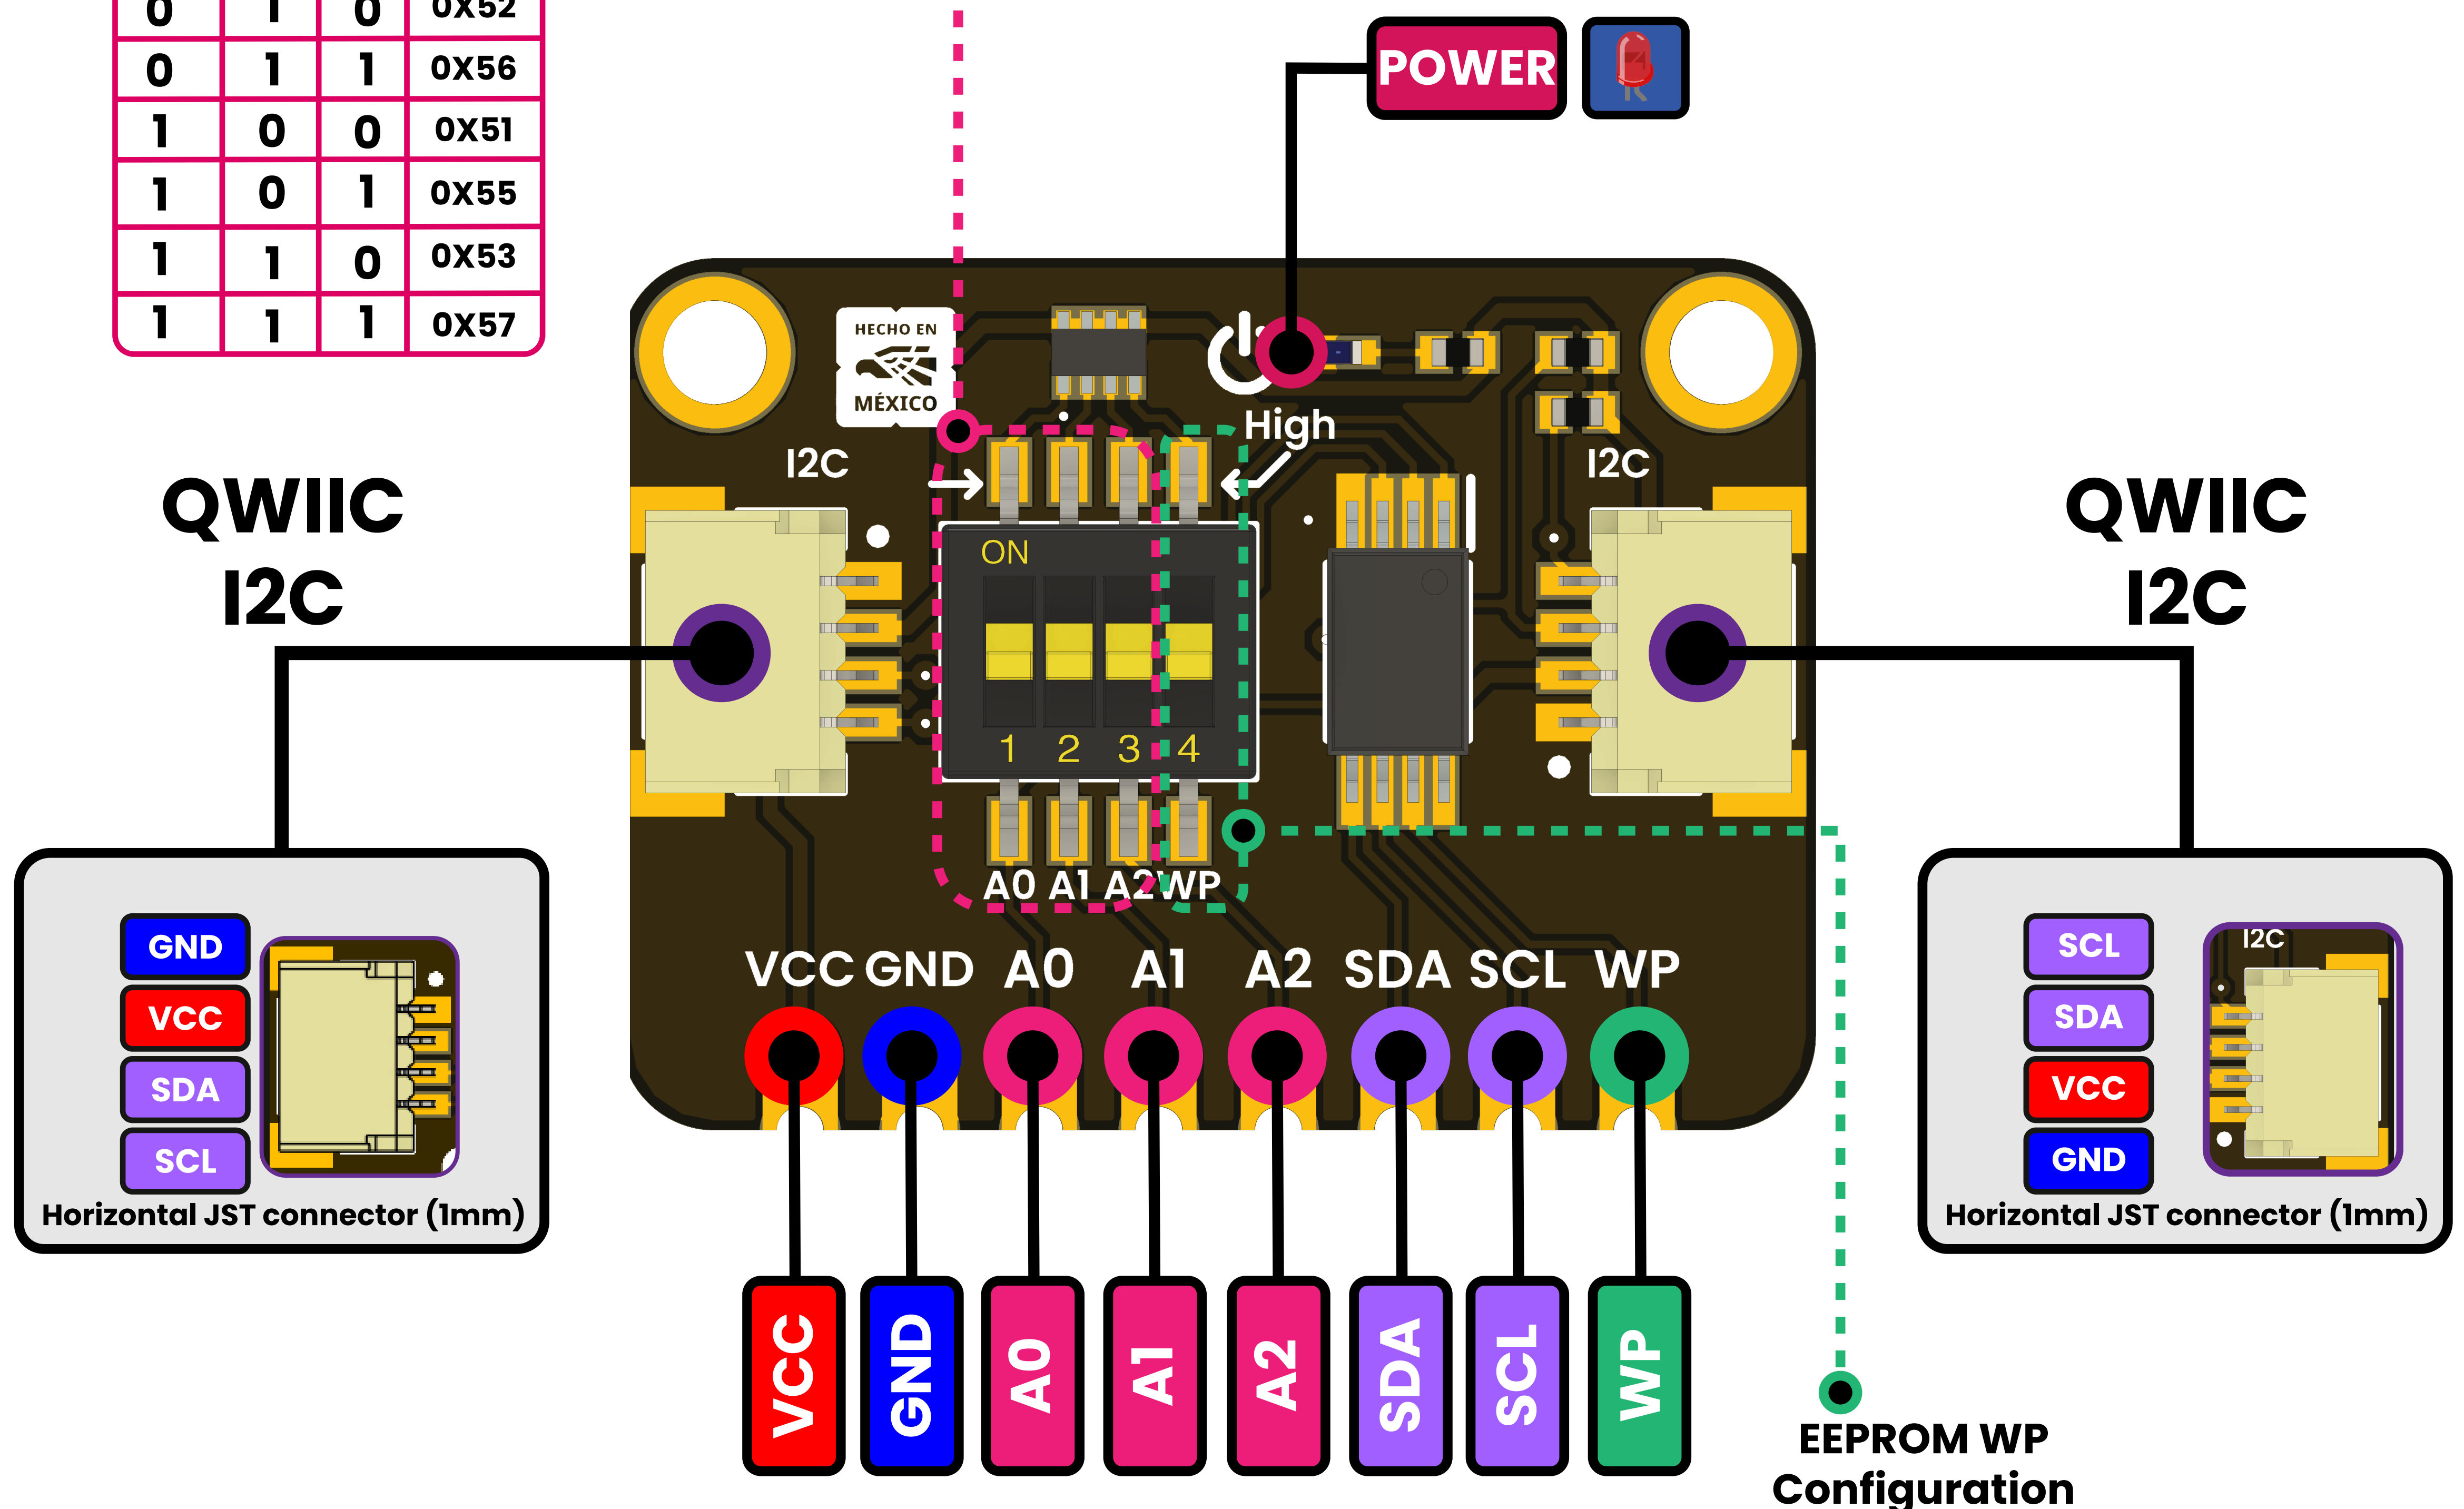

EEPROM WP Configuration

WP	STATE
0	Write Enable
1	Write Protect