



PINOUT

DevLab: I2C MAX30102 Heart Rate SPO2 Sensor

Top view

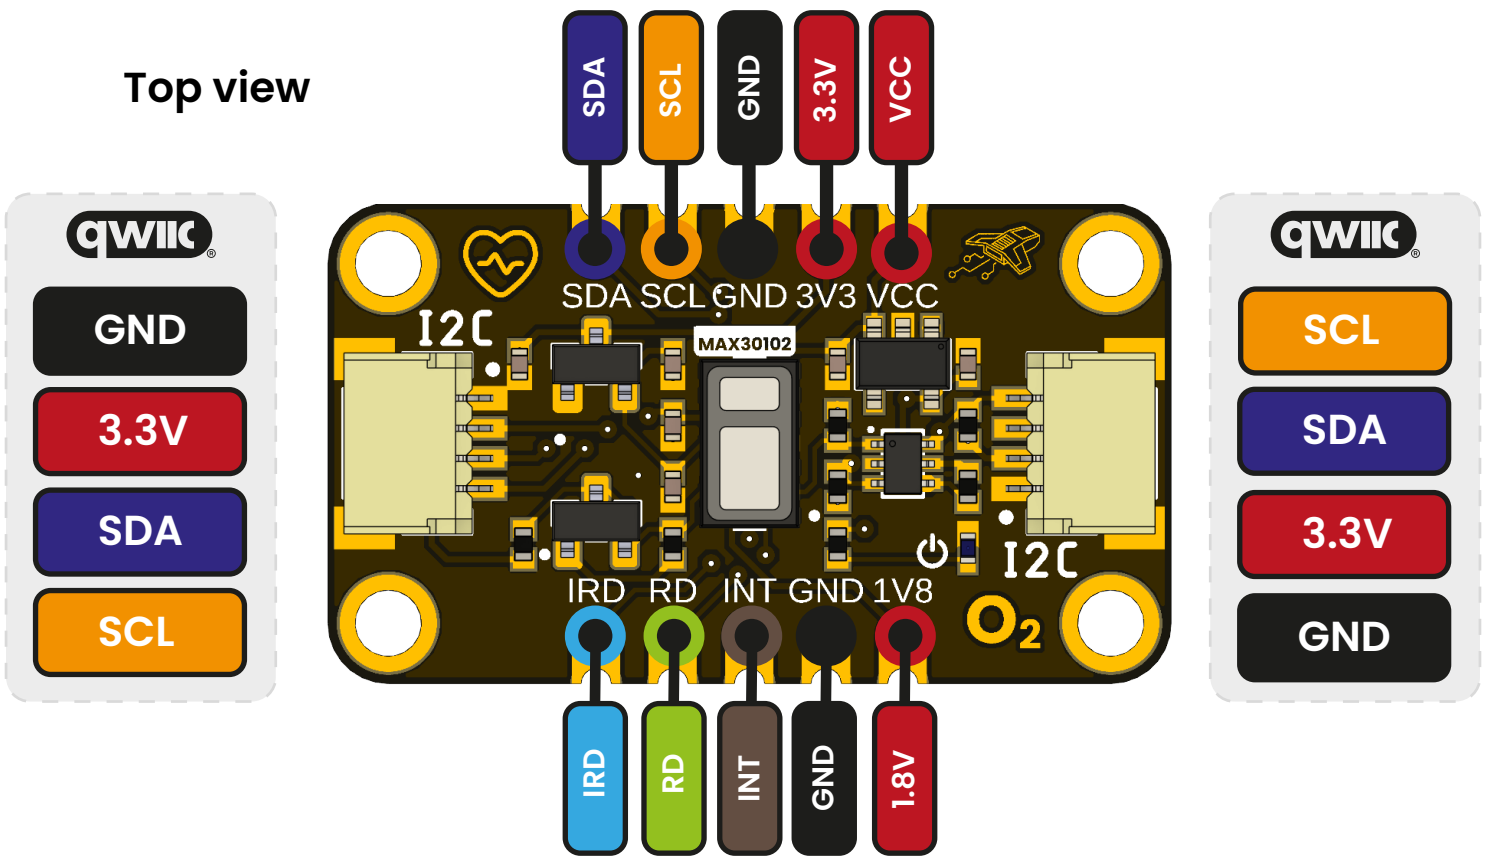

Bottom view

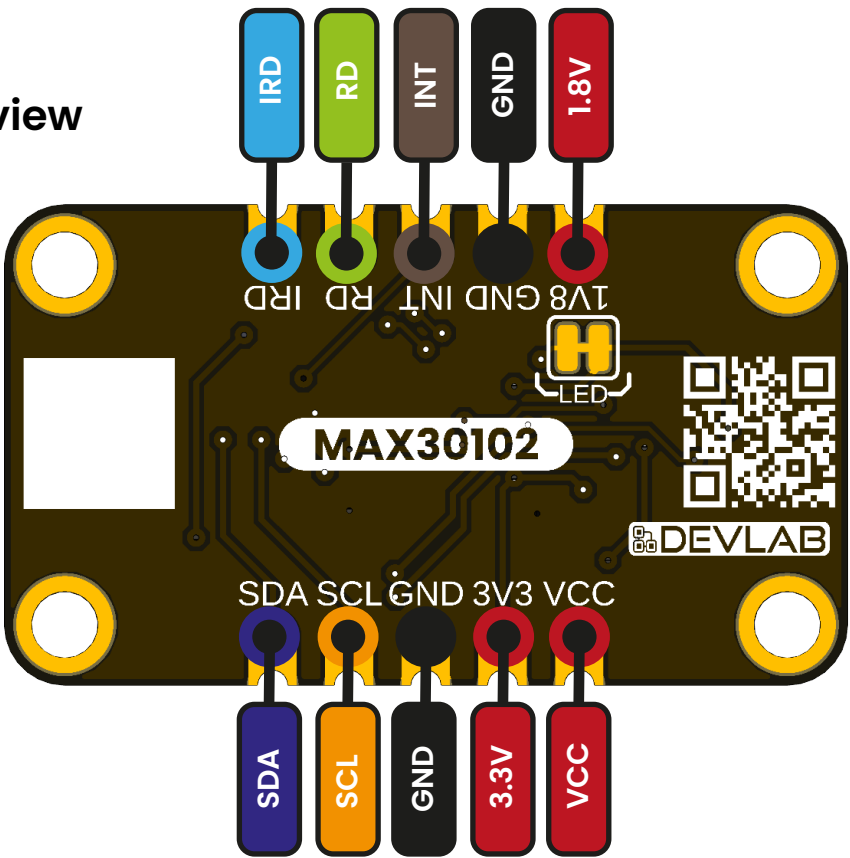

Notes

IRD	Infrared Driver. Output of the infrared LED current driver. It is used to connect an external IR LED and adapt the sensor to the application. It can also be used as a test point to analyze the LED pulse waveform with an oscilloscope.
RD	Red Driver. Output of the red LED current driver. It allows an external red LED to be controlled for testing different wavelengths and customizing the MAX30102. Using this pin is optional.
INT	Interrupt Pin. Used for interrupts. The interrupt output is active low when an event occurs. Some interrupt events include: the FIFO memory is almost full, new samples are available, or the temperature measurement has completed. For more information about these events, refer to the Register Maps and Descriptions.