


Audio

EMMIC-ICS43434

Break out Board for the InvenSense ICS-43434 MEMS Microphone



Description:

The ICS-43434 is a MEMS based, ultra-low noise, I²S interface microphone. It is available in a small 3.5x2.65x0.98mm LGA style package with the sound port on the bottom of the package. The ICS-43434 is comprised of a MEMS sensor, signal conditioning, 24bit A/D converter, on-board decimation and antialiasing filters, power management, and a 24bit I²S interface.

The ICS-43434's can be used in all sorts of applications including games, voice-recognition systems, intercom/teleconferencing systems, security systems, and microphone arrays. It offers a SNR of 64 dBA with a frequency response from 60Hz to 20KHz and a sensitivity tolerance of ± 1 dB, allowing it to be used in high-performance microphone arrays without the need for system calibration.

The EMMIC-ICS43434 provides an easy to use, low-cost, very small breakout board for the ICS-43434. All pins are all mapped to standard 2.54mm/0.1" headers. This allows for use in a standard bread board or to be 'wired' into an application. The header-header spacing is 7.62mm(300mil).

Additional Information:


For more information on the ICS-43434 users can get the complete datasheet from the link below.

<https://www.cdiweb.com/datasheets/invensense/DS-000069-ICS-43434-v1.0-2.pdf>


Features:

- Ultra-small 10x7.6mm (0.39"x0.3") breakout board with .1"/2.54mm header spacing that can be directly soldered into a prototype or used with a breadboard.
- 7.62mm (300mil) header-header spacing.
- All ICS-43434 pins are mapped to header pins.

EMMIC-ICS43434 Schematic

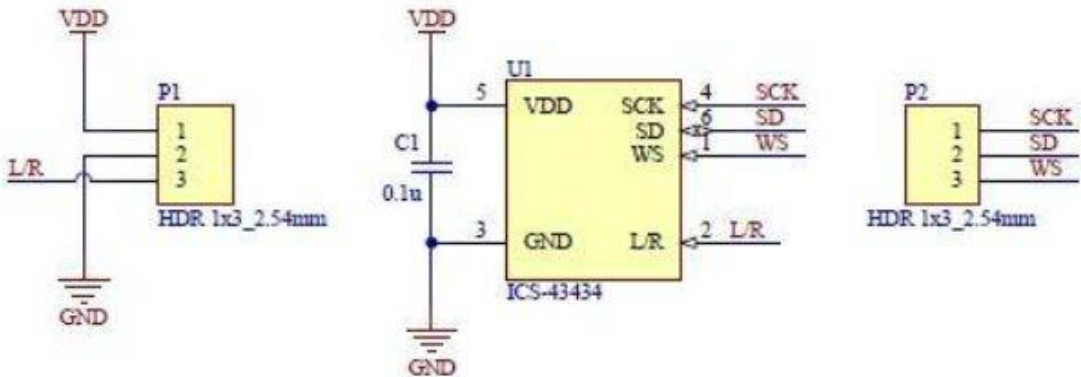


EMMIC-ICS43434 Pin Descriptions

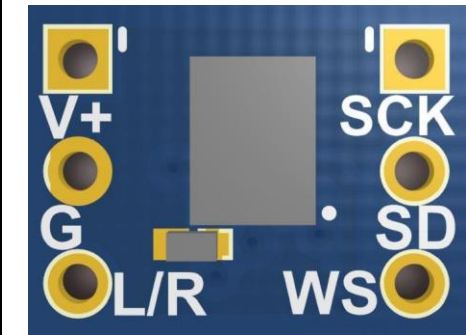

Pin	Name	Type	Function
P1 1	VDD	Input	Power 1.62 to 3.63V
P1 2	Gnd	Ground	Ground. Connect to ground on the PCB
P1 3	LR	Input	Left/Right Channel select low is the left channel, High is the right channel.
P2 1	SCK	Input	Serial data clock for I ² S
P2 2	SD	Output	Serial data output for I ² S
P2 3	WS	Input	Serial Data-Word Select for I ² S Interface


EMMIC-ICS43434 3D PCB – Top

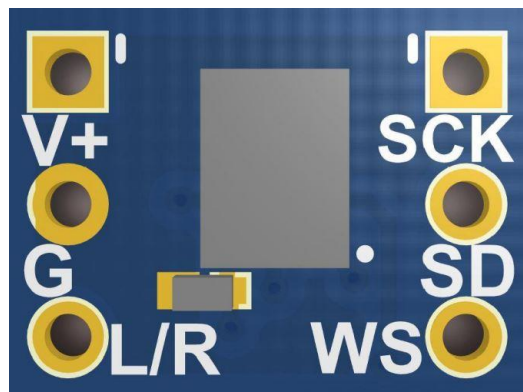

EMMIC-ICS43434 3D PCB – Bottom



EMMIC-ICS43434 PCB – Top

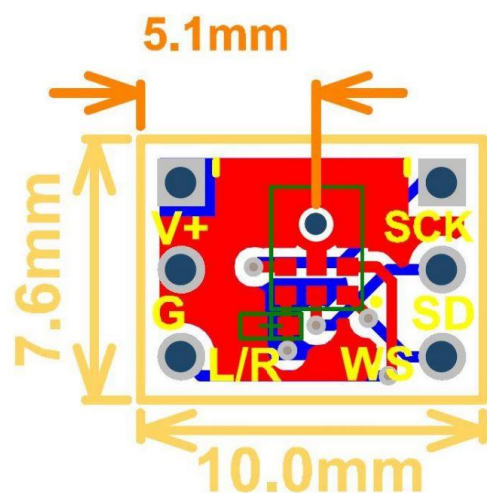

EMMIC-ICS43434 PCB – Bottom

