




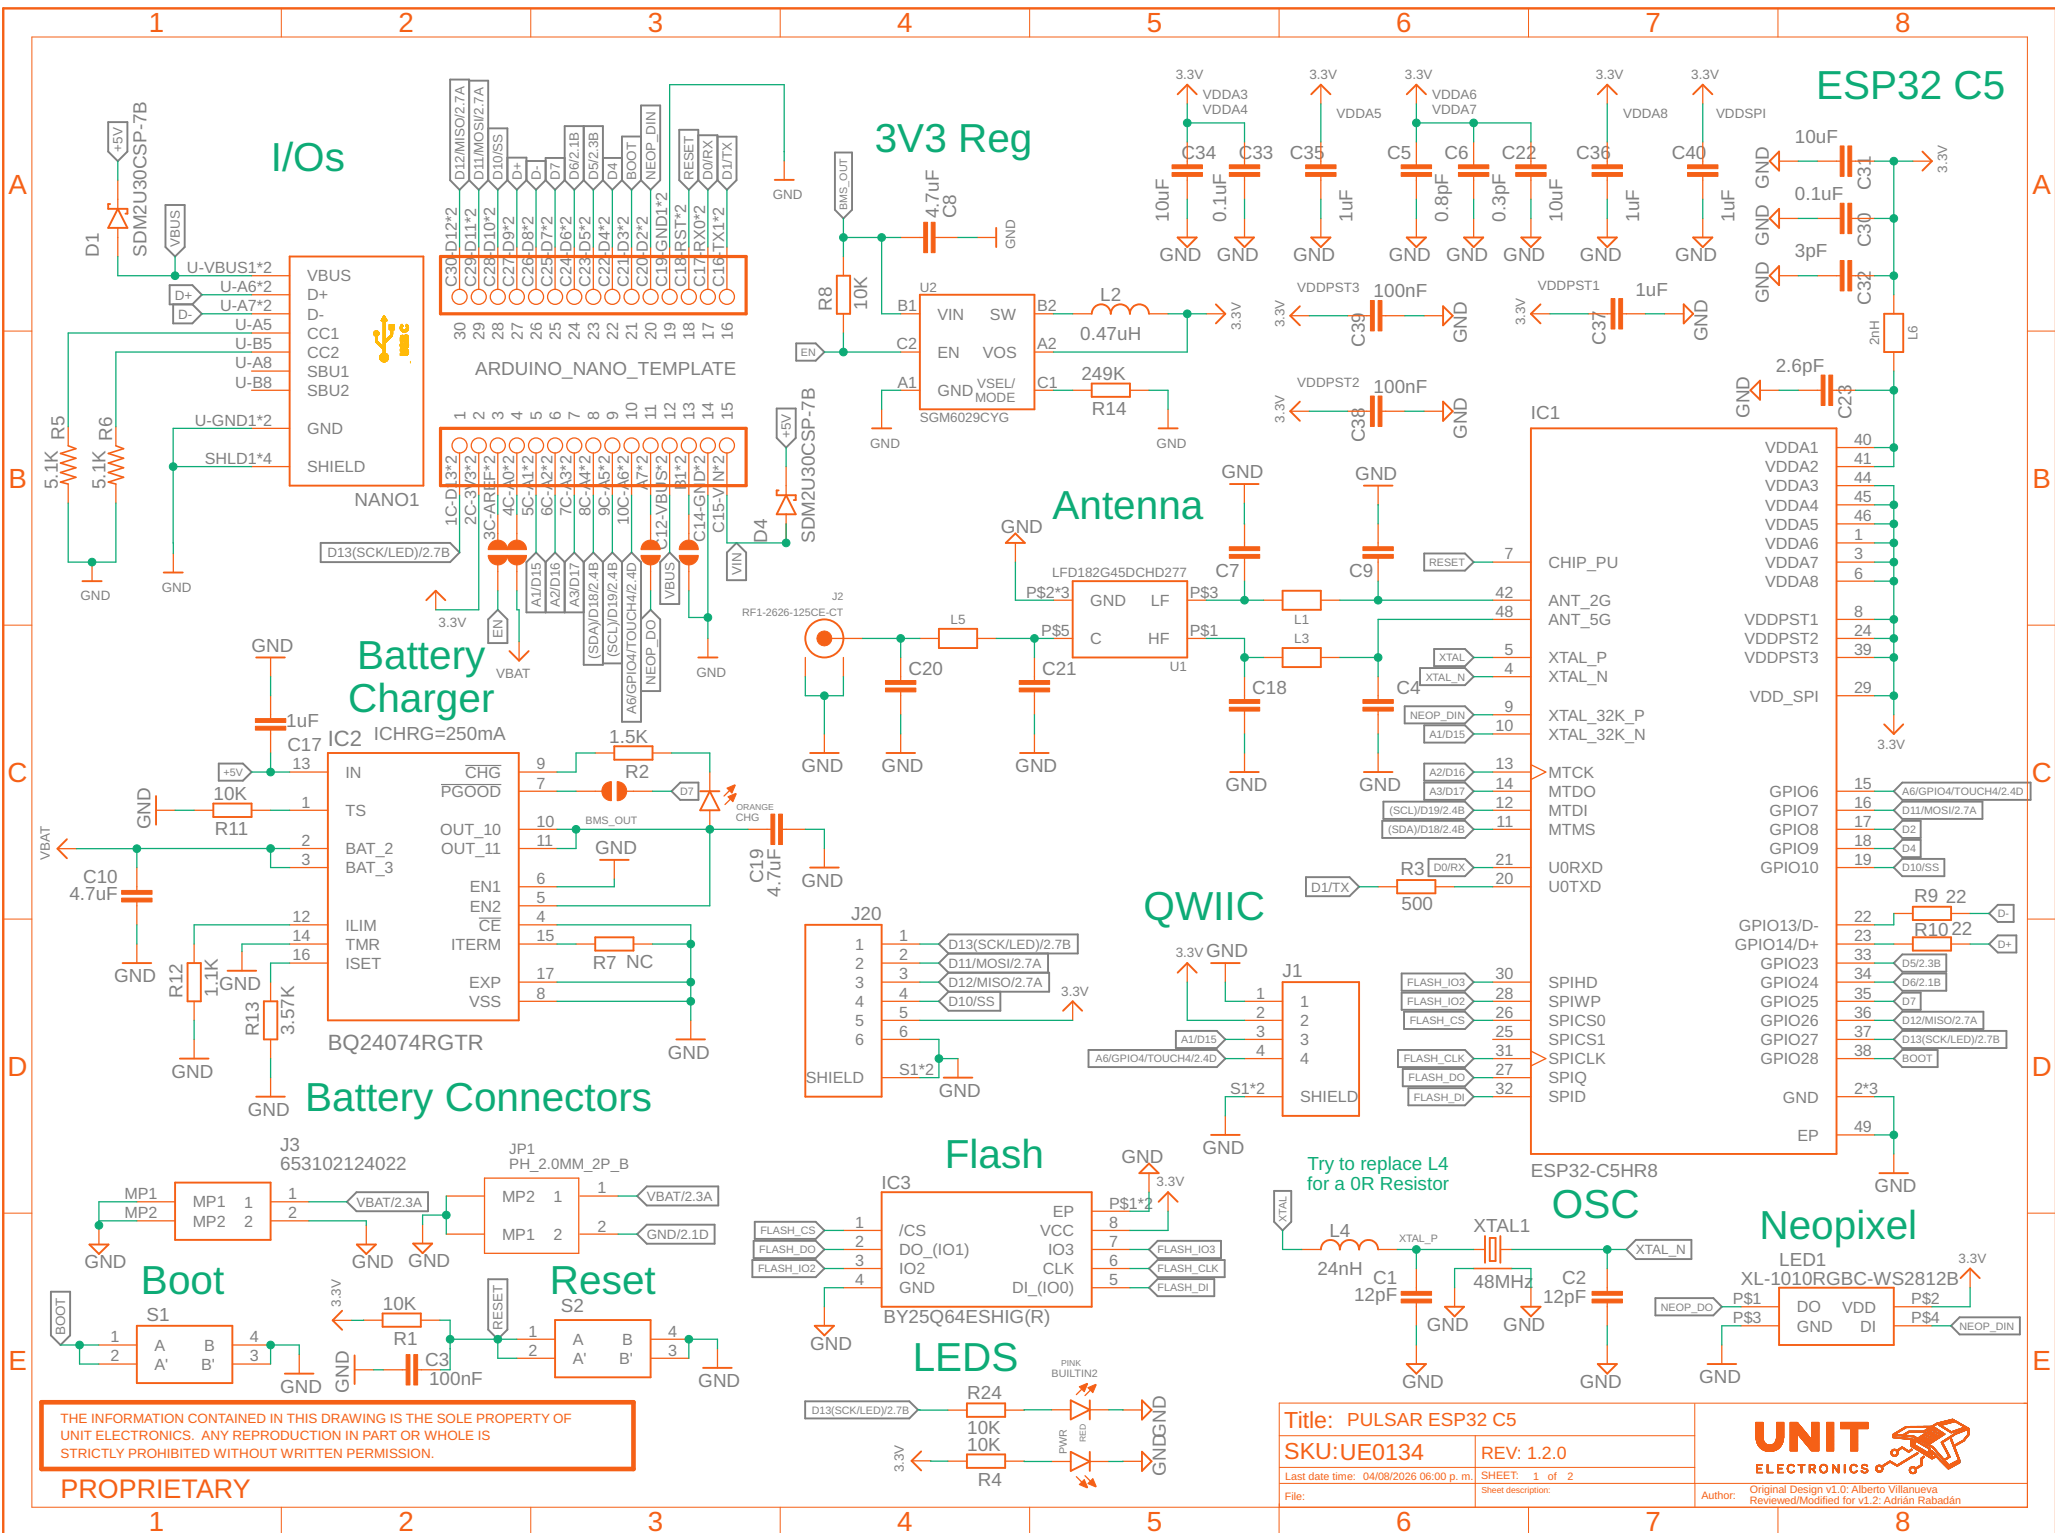


Battery Monitor

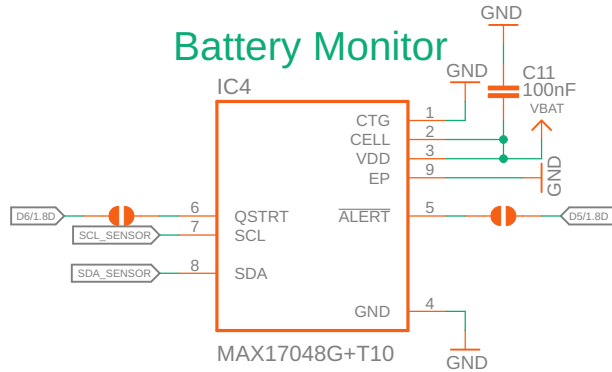


Magnetic Sensor

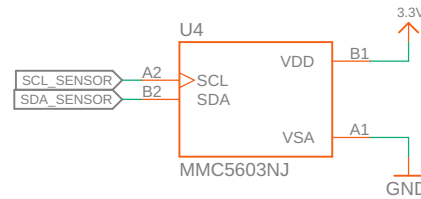


microSD

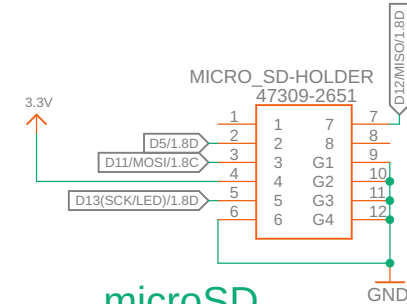


RH Sensor

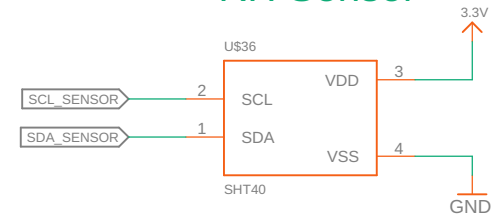

Light Sensor

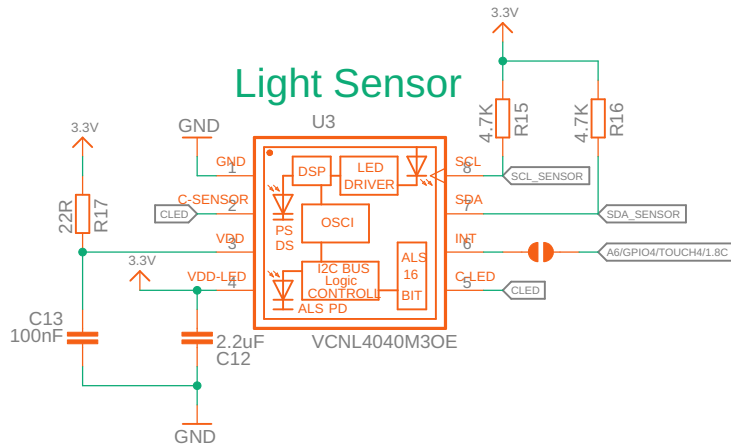

Pressure Sensor

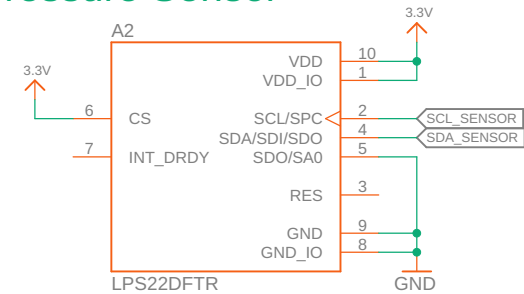

Revision History

Version 1.2
Date: August 4, 2026

- Added SHT40 temperature and humidity sensor.
- Added LPS22DFTR barometric pressure sensor.
- Added MMC5603NJ three-axis magnetometer.
- Connected the new sensors to the shared internal I2C bus (SDA_SENSOR / SCL_SENSOR).
- Improved power routing for higher current capability and increased power stability.
- Changed the header supply source to VBAT.
- Replaced the 1 A VIN/VUSB protection diodes (NSR0320MW2T1G) with 2 A 0603 Schottky diodes (SDM2U30CSP-7B).
- Changed the BQ24074RGTR ISET resistor (R12) to 1.5 kΩ, setting the USB charging current to approximately 1 A.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
UNIT ELECTRONICS. ANY REPRODUCTION IN PART OR WHOLE IS
STRICTLY PROHIBITED WITHOUT WRITTEN PERMISSION.

PROPRIETARY

Title: PULSAR ESP32 C5

SKU:UE0134

REV: 1.2.3

Last date time: 04/08/2026 06:00 p. m.

Sheet description: 2 of 2

File:

UNIT
ELECTRONICS

Original Design v1.0: Albeno Villanueva
Reviewed/Modified for v1.2: Adrián Rabadán