
PINOUT

Devlab: Pulsar ESP32 C5

Top view

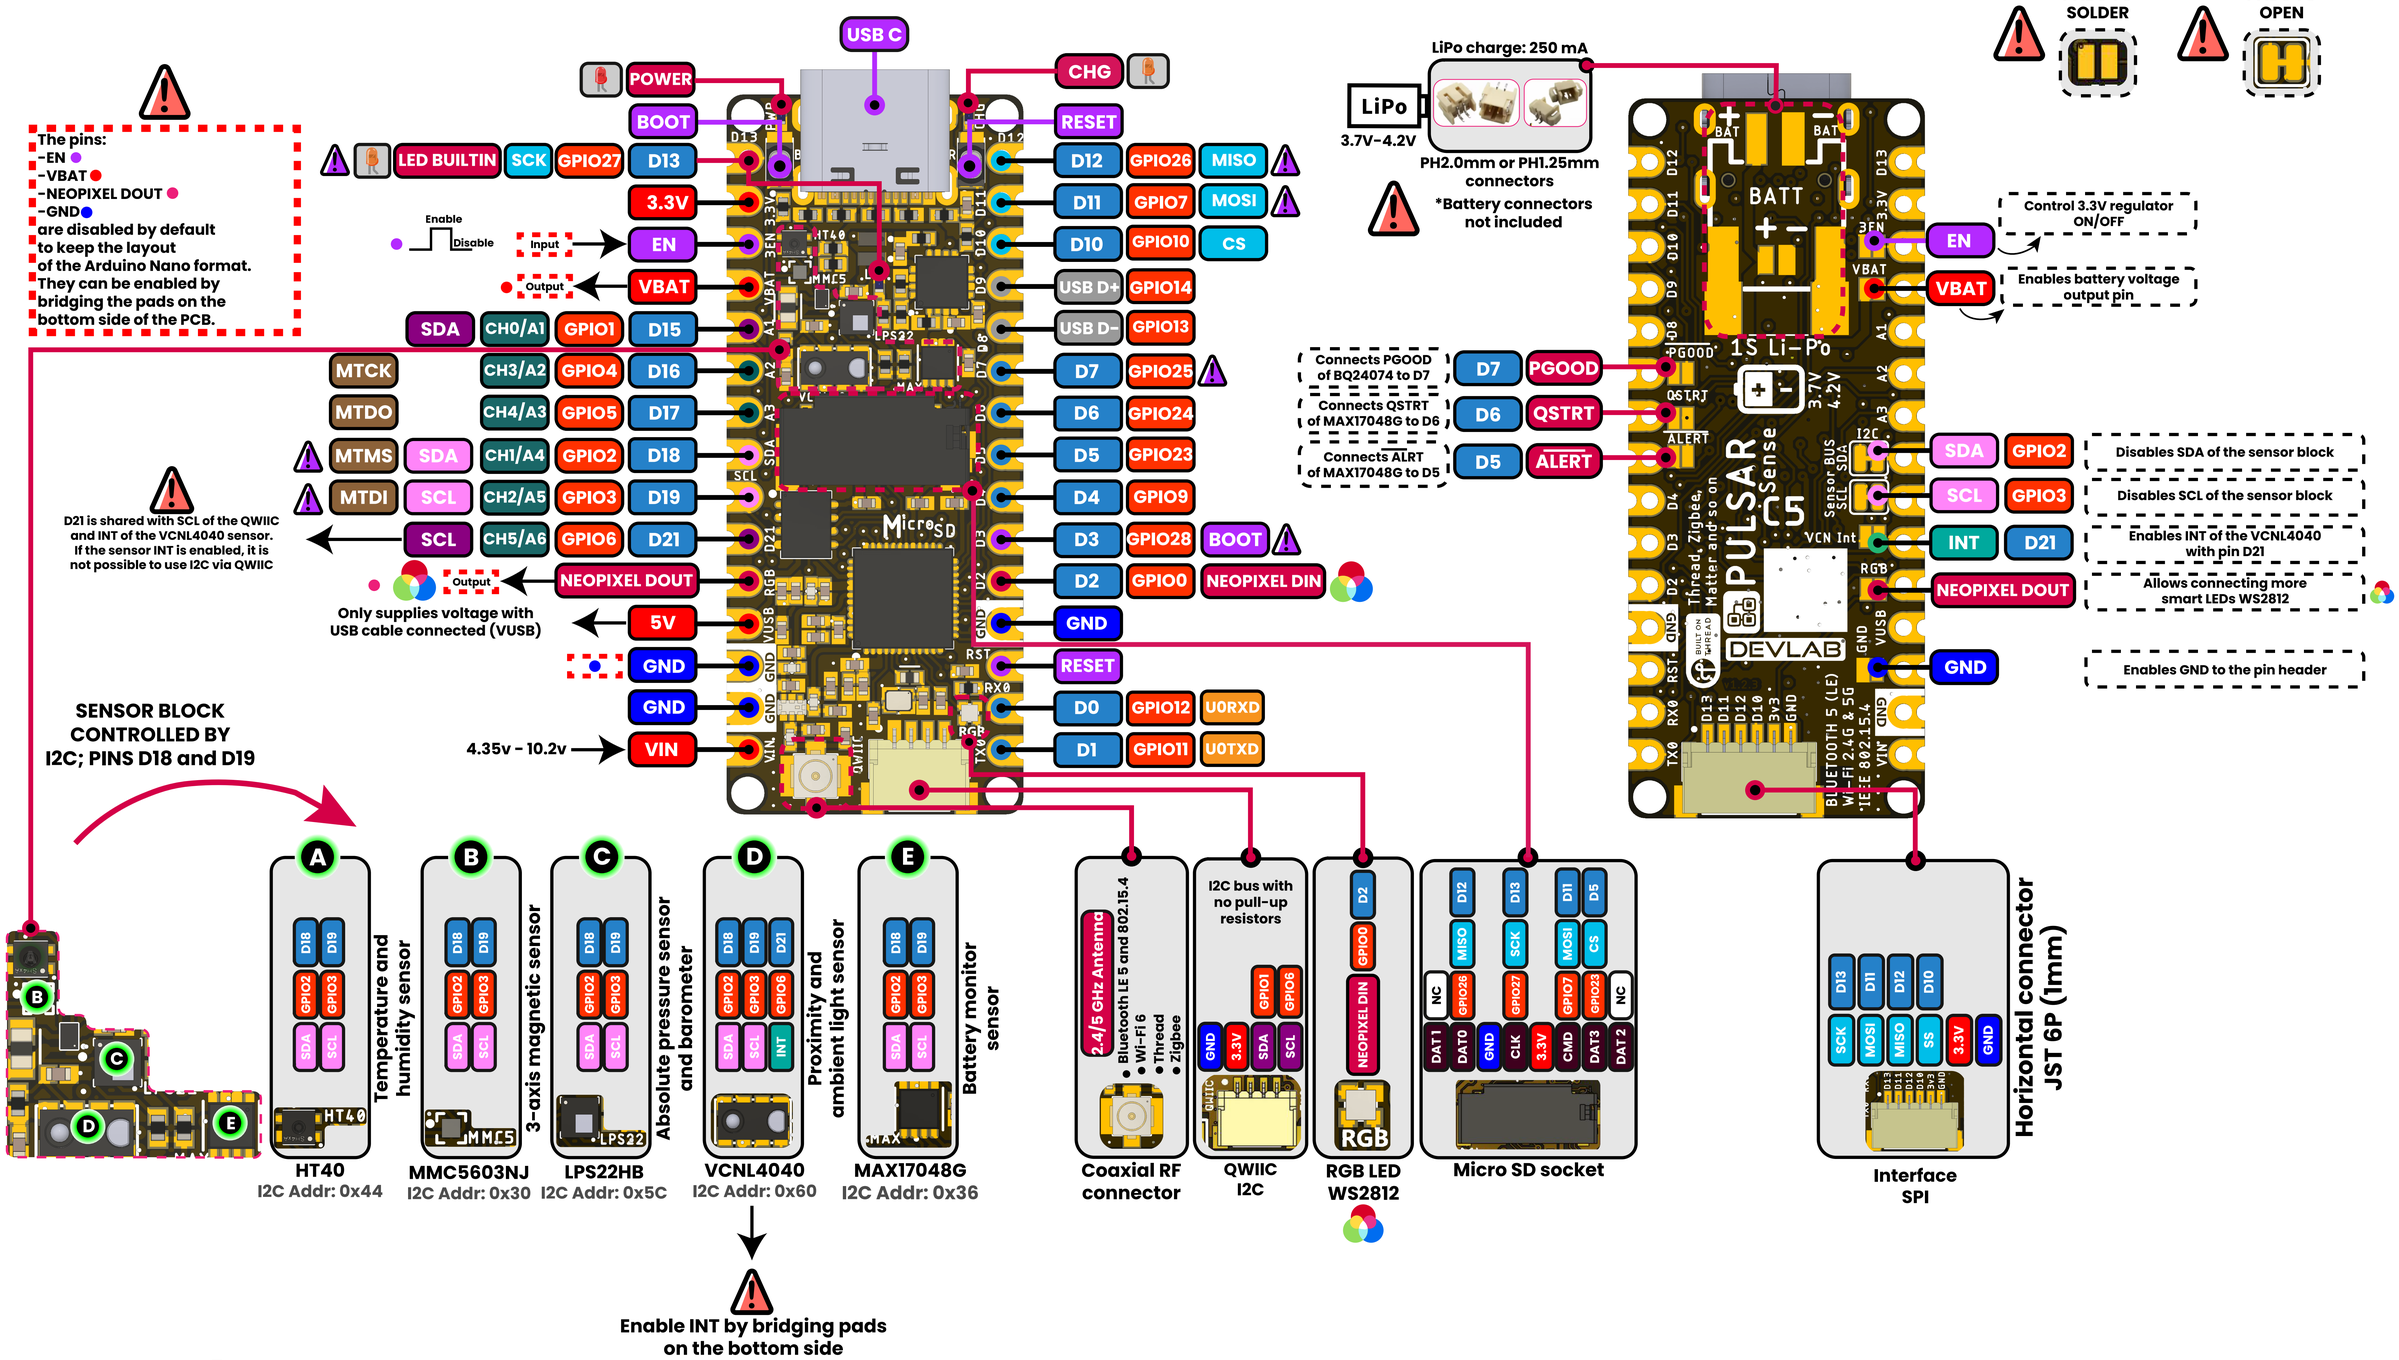

Bottom view

Legend

- Power
- GND
- System
- Devices
- GPIO compatible with Arduino NANO
- GPIO ESP32-C5HR8
- Analog channels compatible with Arduino NANO
- Micro SD
- SPI
- I2C
- I2C of JST QWIIC connector
- UART
- JTAG
- Important note to consider
- **Strapping pins**
  -Boot pins: their level at power-on or reset affects the boot mode
- LED (POWER, CHG, BUILTIN)
- USB data
- RGB LED