

S3 Development Board Product Brief


ESP32-S3 development board with 2.4GHz Wi-Fi and Bluetooth 5.0

Version: 1.0

Modified: 2025-06-23 14:27

Introduction

Unit TouchDot S3 is a compact development board powered by the versatile ESP32-S3 mini chip. Leveraging the ESP32-S3 chip, the Touch-dot S3 is a versatile development board crafted for creative wearables, IoT implementations, and smart devices. Inspired by the Lilypad aesthetic but delivering modern functionality, it marries a compact form factor with robust connectivity and power management features for seamless prototyping.

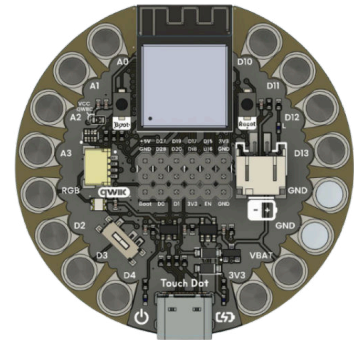

Functional Description

- Integrated ESP32-S3 module with Wi-Fi and Bluetooth 5.0
- USB-C for power and programming
- 3.3V power rail compatible with low-voltage peripherals
- Built-in QWIIC connector for rapid sensor integration

Electrical Characteristics

- Operating voltage: 3.3V
- Max current draw: 500mA (with Wi-Fi active)
- GPIO logic level: 3.3V
- ADC resolution: 12-bit (0–4095)
- Touchpad sensitivity: configurable

Applications

- IoT sensor nodes
- Smart home automation
- Environmental monitoring
- Educational prototyping platforms

Settings

Interface Overview

Interface	Signals / Pins	Typical Use
UART	Tx, Rx	Serial terminal or sensor communication
I2C	SDA, SCL	QWIIC modules, OLED displays
SPI	MOSI, MISO, SCK, CS	External flash, TFT display
USB	D+, D-	Native USB device or host

Supported Pins

Symbol	I/O	Description
VCC	Input	Power supply (3.3V or 5V)
GND	GND	Ground connection
IO	Bidirectional	General-purpose I/O pins


Pin & Connector Layout

Group	Available pins	Suggested use
GPIO	D2 to D13	Sensors, actuators
UART	Tx and Rx	Serial communication
TouchPad	T1 to T11	Capacitive sensors for touch detection
Analogic	A0 to A8	12-bit (0–4095) resolution
SPI	Optional	Displays, additional memory


Block Diagram

UNIT Touchdot S3

Top view

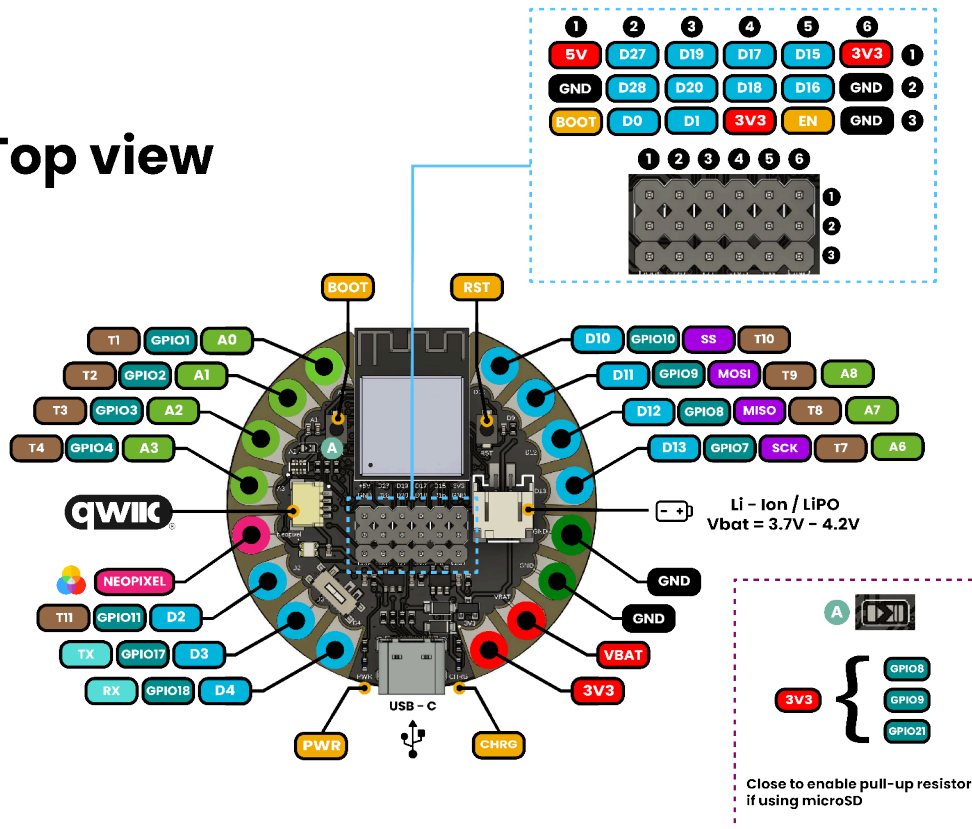


Bottom view

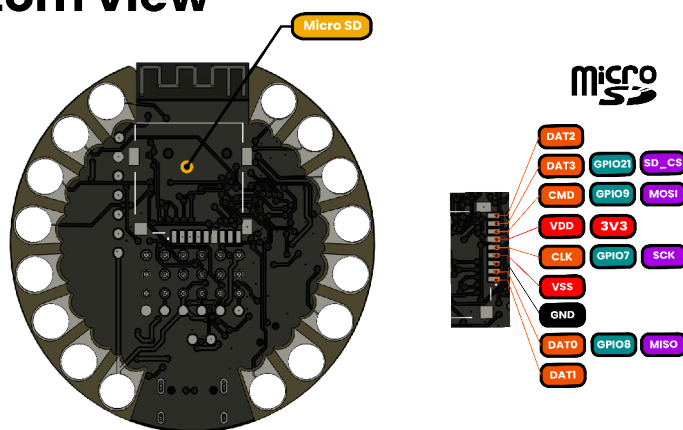

Description:

■ Supply voltage	■ GPIO compatible with Arduino	■ Touch Pad	■ Micro SD Data
■ GND	■ GPIO ESP32	■ Analogic	■ RGB
■ Components	■ UART	■ SPI	■ Exposed pad

Dimensions

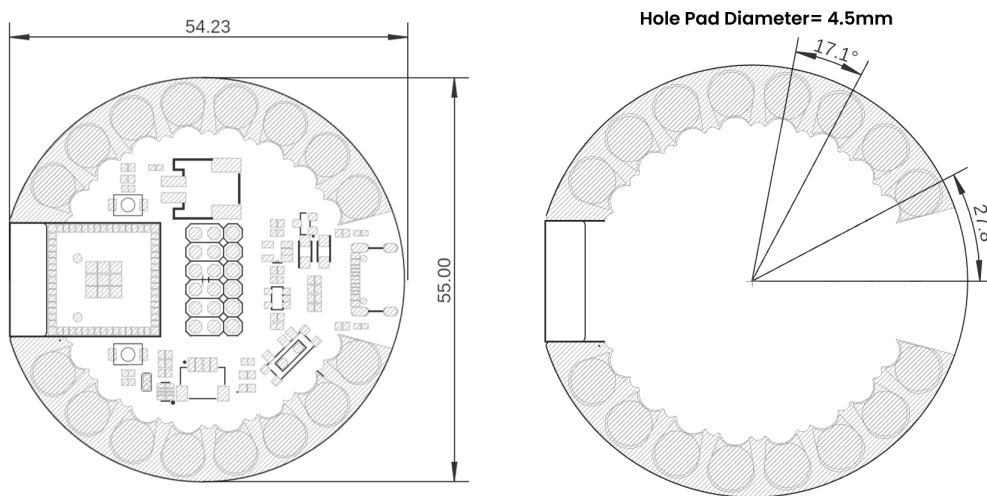

Mechanical dimensions in millimeters of Touch Dot S3

Usage

- Arduino IDE (ESP32 board manager)
- PlatformIO (ESP32-S3 support)
- ESP-IDF toolchain
- MicroPython firmware
- CircuitPython (via UF2 bootloader)

Downloads

- Schematic PDF
- Board Dimensions DXF
- Pinout Diagram PNG

Purchase

- Buy from UNIT Electronics
- Open product page