

ECE 447

Lesson 24

Pulse Shaping & Intersymbol Interference (ISI)



UNITED STATES
AIR FORCE
ACADEMY

SCHEDULE AND ADMIN

- [Schedule](#)
- Admin
 - **HW5.** Was due Lesson 23 (13 Oct).
 - **Lab 5.** Due tonight (Lesson 24, 15 Oct) to Gradescope.
 - **HW6.** Assigned today. Due Lesson 28 (Tue, 27 Oct) to Gradescope.
 - Problem 4 of HW6 uses M -ary signaling from Lesson 26 – start with Problems 1-3.


REVIEW

- Line codes - set of symbols a_k that determine the amplitude of the baseband pulses, $p(t)$
- Sum of scaled pulses transmitted at $R_b = 1/T_b$ pulses per second: $y(t) = \sum_k a_k p(t - kT_b)$
- Desired properties:
 - Low bandwidth
 - Power efficiency
 - Error detection/correction capability
 - No DC content
 - Timing info (self-clocking)
 - Transparency
- PSD of $y(t)$ controlled both by line code and pulse shape
- Time-limited signal (e.g., $p(t) = \Pi\left(\frac{t}{T_b}\right)$) has ∞ bandwidth
- Band-limited signal (e.g., $P(f) = \Pi\left(\frac{f}{R_b}\right)$) needs ∞ time

INTERSYMBOL INTERFERENCE (ISI)

- Time-limited pulse transmitted over low-pass channel → Spectral distortion occurs → Pulse spreads beyond its allotted T_b interval
- Band-limited pulse transmitted over band-limited channel → Not time-limited pulse → Pulse spreads beyond its allotted T_b interval
- Either way ISI occurs!
- ISI is not noise - caused by channels that aren't distortionless over the signal bandwidth
- Pulse spreading fine **as long as no effect at *decision-making instant***




SYMBOL DETECTION

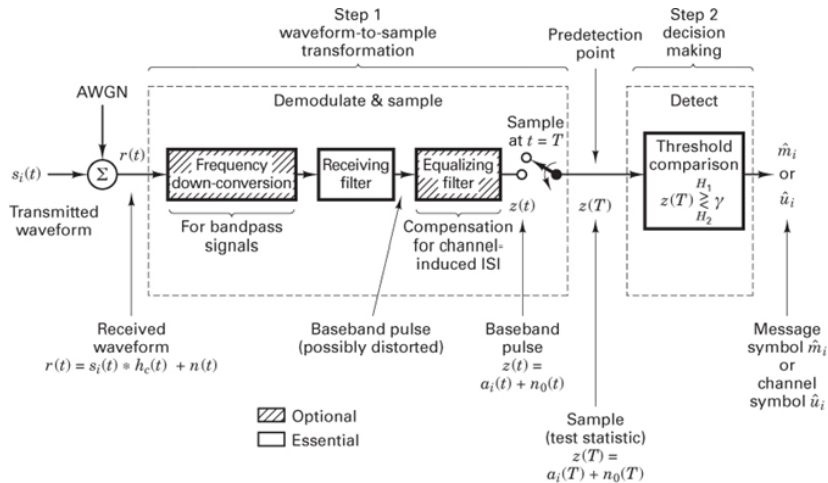

NYQUIST'S FIRST CRITERION FOR ZERO ISI

$$p(t) =$$

- Pulses allowed to overlap, but shaped to have zero ISI at decision points
- $p(t) = \text{sinc}(\pi R_b t)$ only one to meet Nyquist's First Criterion with min BW $R_b/2$ Hz, but...

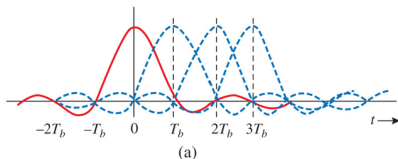


NYQUIST'S FIRST CRITERION FOR ZERO ISI

- Want pulse with sharper roll-off to mitigate time jitter errors
- Nyquist showed this desired pulse will have bandwidth

$$B_T = \frac{(1 + r)R_b}{2}$$

where r is the **roll-off factor** between $0 \leq r \leq 1$

- $r = \frac{\text{excess bandwidth}}{\text{theoretical minimum bandwidth}} = \frac{f_x}{R_b/2}$, where f_x is the bandwidth in excess of min bandwidth $R_b/2$
- Family of raised cosine pulses meets Nyquist's first criterion

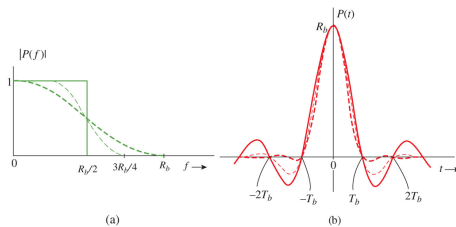

RAISED COSINE

- Where have you seen this before?
- We will come back to it in a future lesson on Matched Filters
- Lab 5 shapes the transmitted symbols with a Root-Raised-Cosine (RRC) filter to control the bandwidth — you sweep its **roll-off factor** α and watch bandwidth trade off against how fast the pulse decays in time
- Using the square root of the raised cosine creates ISI... but by using another RRC filter on the receiver, we end up with a regular raised cosine filter - which meets Nyquist's First Criterion and minimizes ISI!