

ECE 447

Lesson 36

Binary System

Performance, Part 1






UNITED STATES
AIR FORCE
ACADEMY

SCHEDULE AND ADMIN

- **Schedule.**
 - Lesson 36 - Matched filters, binary digital system performance (Part 1)
 - Lesson 37 - Binary digital system performance (Part 2)
 - Lesson 38 - Error correction
 - Lesson 39 - SDR Lab 8: Capstone image transfer
 - Lesson 40 - Advanced topics: OFDM, MIMO, CDMA
 - Lesson 41 - Course review
 - **Final Exam** – 0730-1120, Saturday, 12 Dec
- **Admin**
 - **HW9.** Assigned today. Due Lesson 40 (Mon, 7 Dec) to Gradescope.
 - **Lab 7.** Due Lesson 37 (Mon, 23 Nov) to Gradescope.

BINARY COMMUNICATION SYSTEMS

- Received signal is $y(t) = \pm p(t) + n(t), 0 \leq t \leq T_b$
- Receiver filters signal through $H(f)$: $r(t) = h(t) * y(t) = \pm p_o(t) + n_o(t)$
(ideally the filter aligns $r(t)$ so it is sampled at the "widest opening of the eye")
- Decision variable: $r(t_m) = \pm p_o(t_m) + n_o(t_m)$, where $n_o(t_m) \sim \mathcal{N}(0, \sigma_n^2)$
- Let $\pm p_o(t_m) = \pm A_p$. Then $r_0(t) \sim \mathcal{N}(-A_p, \sigma_n^2)$ and $r_1(t) \sim \mathcal{N}(A_p, \sigma_n^2)$
- Optimum detection threshold? Probability of bit error P_e ?

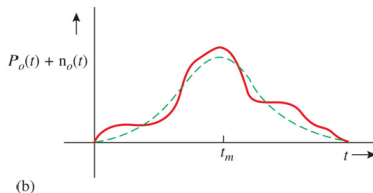



MATCHED FILTER

- Want to minimize P_e using best possible receiver filter $H(f)$
- Did you follow the matched filter derivation in the reading (Section 9.1.2)?
- Cauchy-Schwarz inequality!
- General matched filter: $H(f) = \frac{P^*(f)e^{-j2\pi ft_m}}{S_n(f)}$
- For AWGN:
 - $S_n(f) = N_0/2$ where N_0 (or $\mathcal{N}$ in the textbook) is the noise PSD (or a measure of the total noise power in 1 Hz of bandwidth)
 - $H(f) = P^*(f)e^{-j2\pi ft_m}$ and $h(t) = p(t_m - t)$ for any real valued pulse $p(t)$
 - t_m becomes T_0 since $p_0(t) = h(t) * p(t)$ reaches its max amplitude at $t = T_0$
 - $H(f) = P^*(f)e^{-j2\pi fT_0}$ and $h(t) = p(T_0 - t)$
 - $P_e = Q\left(\sqrt{\frac{2E_p}{N_0}}\right)$, where $E_p = \int_0^{T_0} |p(t)|^2 dt$ is the energy of the pulse
- Correlation detector produces equivalent result as matched filter - uses cross-correlation to measure similarity of received signal with $p(t)$



BINARY SIGNALING

- Generalized form of what we've already covered - allow two different transmit pulses, $p(t)$ or $q(t)$ (representing 1 or 0)
- Both have same noise $n(t)$ added to them
- $p_{r|m} \sim$ Gaussian with mean either $q_0(T_b)$ or $p_0(T_b)$ and variance σ_n^2
- Optimal threshold: $a_0 = \frac{p_0(T_b) + q_0(T_b)}{2}$ (assuming equally likely transmission, i.e., $p_m(0) = p_m(1) = 0.5$)

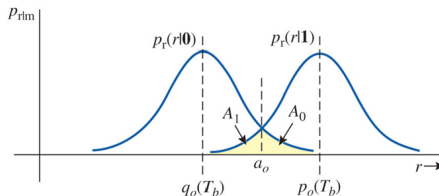

BINARY SIGNALING (CONT'D)

- Optimum filter: $H(f) = [P^*(f) - Q^*(f)]e^{-j2\pi fT_b}$ and $h(t) = p^*(T_b - t) - q^*(T_b - t) \rightarrow$ matched to pulse $p(t) - q(t)$
- $P_e = P_b = Q \left(\sqrt{\frac{E_p + E_q - 2E_{pq}}{2N_0}} \right)$, where $E_{pq} = \text{Re} \left\{ \int_0^{T_b} p(t)q^*(t)dt \right\}$
- For real values pulses, $h(t) = p(T_b - t) - q(T_b - t)$

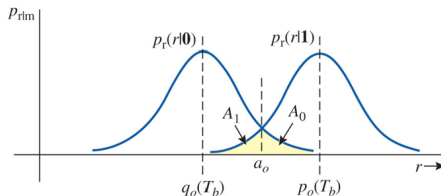

BINARY SIGNALING PERFORMANCE (AWGN)

Polar signaling, $q(t) = -p(t)$

