

## 54th CIRP Conference on Manufacturing Systems

# Predictive analytics in quality assurance for assembly processes: lessons learned from a case study at an industry 4.0 demonstration cell

Peter Burggräf<sup>a</sup>, Johannes Wagner<sup>a</sup>, Benjamin Heinbach<sup>a</sup>, Fabian Steinberg<sup>a</sup>, Alejandro R. Pérez M.<sup>\*a</sup>, Lennart Schmallenbach<sup>a</sup>, Jochen Garcke<sup>b,c</sup>, Daniela Steffes-lai<sup>b</sup>, Moritz Wolter<sup>b,d</sup>

<sup>a</sup>Chair of International Production Engineering and Management (IPEM), Universität Siegen, Paul-Bonatz-Straße 9-11, Siegen - 57076, Germany

<sup>b</sup>Fraunhofer Institute for Algorithms and Scientific Computing (SCAI), Schloss Birlinghoven 1, Sankt Augustin- 53757, Germany

<sup>c</sup>Institute for Numerical Simulation, Universität Bonn, Endenicher Allee 19b, 53115 Bonn

<sup>d</sup>Institute for Computer Science, Universität Bonn, Endenicher Allee 19a, 53115 Bonn

\* Corresponding author. Tel.: +49-271-740-4509; fax: +49-271-740-2630. E-mail address: [alejandro.perez@uni-siegen.de](mailto:alejandro.perez@uni-siegen.de)

## Abstract

Quality assurance (QA) is an important task in manufacturing to assess whether products meet their specifications. However, QA might be expensive, time-consuming, incomplete, or delayed. This paper presents a solution for predictive analytics in QA based on machine sensor values during production while employing specialized machine-learning models for classification in a controlled environment. Furthermore, we present lessons learned while implementing this model, which helps to reduce complexity in further industrial applications. The paper's outcome proves that the developed model was able to predict product quality, as well as to identify the correlation between machine-status and faulty product occurrence.

© 2021 The Authors. Published by Elsevier B.V.

This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0/>)  
Peer-review under responsibility of the scientific committee of the 54th CIRP Conference on Manufacturing System.

**Keywords:** Machine-Learning; Predictive Quality; Production; Quality Assurance; Logistic Regression

## 1. Introduction

For companies aiming at quality leadership, the final quality of any goods produced is vital for market success. Thus, companies need to ensure that every product meets the expected customer and legal requirements. The quality control (QC) of production processes and products is one fundamental part of general quality management. It contains the measures and activities needed to fulfill specific quality requirements [13].

Over the years, diverse methods to ensure the quality of products have been developed [13]. Among the most used methods, we have Auditing, Total Quality Control (TCQ) [9], Poka-Yoke Techniques [15], the 100% control of each produced product [8], and statistical methods like the Statistical Process Control (SPC) [17]. Independently of the method used, the goal is the same, to avoid the production, or to identify and remove faulty products before delivering those to the customer.[13]. However, the relationship between cost and efficiency varies from one method to another. This is noticeable, e.g., at the cost

of highly specialized equipment for automated inspection, or the cost of employees performing a manual inspection of the produced products versus the accuracy of detecting all faulty products [16].

In general, the quality characteristics of a product can be classified as attributes or variables. *Attributes* are qualitative measurable characteristics, i.e., color or texture. On the other hand, *variables* are quantitative measurable characteristics, which are shown as numbers, i.e., length or width [13]. The advantage of variable measurements is that in the event of a defective intermediate or end product, precise measured values are available, which enable precise adjustment of the process parameters, as well as the possibility of observing trends in the collected data. This would enable the possibility to employ predictive models to determine the quality of the product before the QC process takes place [3, 10].

With the evolution of machine learning (ML) applications [7], approaches combining QC and predictive models are becoming more relevant. The applications diversify from the defect analysis of the produced piece [5, 18], to process-oriented QC [11, 10, 2, 14], see Section. 2. Independently of the research

group previous stated, within the scope of the related works, there is no evidence of an evaluation framework for diverse ML techniques applied in QC process.

Considering the high amount of data available in today's industries, one possible approach to reduce the inspection costs and simultaneously increase the accuracy would be to implement an ML model capable to predict the product quality based on the initial state of the machine. This will not only help to detect faulty products before the QC process is performed, it would also strengthen the current QC methods by combining them with QC predictive models to compensate for their current weakness.

While implementing ML models to QC, several challenges arise that have not yet been completely addressed, e.g., what to consider while evaluating the output from ML models for industrial applications? (model accuracy vs applicability at industrial environments); what steps should be followed to prepare the data for predictive QC methods?; and what findings and lessons are worth to consider for further applications in the area?. For this, we cover the methods used in quality check in production, as well as the bases of predictive analytics in production (Section. 2). We describe a suitable industrial platform to implement the ML models (Section. 3). Then, we explain the three machine learning methods implemented on this work: Multilayer perceptrons, Support Vector Machines, Decision Tree (Section. 4), followed by the description of the experiment process from the data acquisition and preprocessing, to the classifier optimization and testing (Section. 5). Finally, we describe the remarks and findings achieved after the finalization of this project phase (Section. 6), as well as presents a list of lessons learned during the implementation of the project, which might be helpful on further implementations (Section. 7).

## 2. Related Works

According to Delen and Damirkan, predictive analytics (PA) consists of unraveling the inherent relationships (if any) between input and output by using data and mathematical techniques [4]. PA offers a wide range of applications, and it can be implemented, as long as the provided data are sufficiently available [3]. According to Krauß, there is a wide range of applications for PA in the industrial and production environment. Some common industrial applications of PA in the industry are focused products (design and optimization), machines and assets (predictive maintenance, anomaly detection, self learning-machines) and process (scheduling, process design, predictive process control) [10].

An explorative literature review on this matter reveals that publications that combine PA and QC became more relevant in the last six years. This could be in great part, due to computer power limitations in the early research phase and the recent increase of ML applications in this area. Related works are mostly allocated into two groups, defects analysis of produced pieces and process-oriented QC. Due to the recent advances in ML approaches specialized in image and patterns recognition [3], a great number of publications are focused on

the products-analysis based on images from cameras during the production process, e.g., Escobar employs pattern recognition for defect detection in a binary classification problem based on a  $l_1$ -regularized logistic regression [5]; Sohnius focus on defect prediction within printed layers by employing supervised models based on features extracted directly from the machine code and the scan of the layers surface [18]. Other authors focus their research in process-oriented QC, e.g., Krauß focused on describing the ML pipeline to implement automated machine learning for predictive quality in production [11] and product quality prediction in a process chain [10]; Aumi focussed on the model development for predictive quality control of batch processes [2]; Ritter studied the ways of process modeling on quality prediction and assurance of chipboard [14].

Applications that combine PA with QC might improve the current QC processes. However, based on the previous findings, there are no clear references to the impact of implementing ML models based just on model accuracy, together with industrial factors of the QC process. By employing machine learning (ML) techniques (Section. 4), together with the QC traditional methods, it would be possible to upgrade, and to improve the relationship between inspection costs and the probability of detecting faulty products during the QC process, as well as, decrease the risk of labeling NOK pieces as OK and deliver them to costumers. However, before implementing these techniques, it is important to define the platform where these predictive analytics models will be implemented in a controlled and transparent industrial environment.

## 3. The case industry 4.0 demonstration cell

Our case study is an abstraction of an assembly process of the industry. This case study is a highly flexible and transparent platform regarding software and hardware access and manipulation. The industry 4.0 demonstration cell is composed of three independent conveyor belts, a robotic assembly arm (UR3), a laser scanner used for quality control as well as a wide range of sensors, all orchestrated by a SIEMENS PLC S7-1200, see Figure 1. The executed abstracted assembly process consists of stacking two disks of different sizes on top of each other. The corresponding pseudo product quality is later determined by the laser scanner by evaluating the concentricity of both disks. If the disks' concentricity is within a tolerance of 1.5mm, the piece is classified as OK, if not, it is classified as NOK. By considering that malfunctions can occur during industrial production processes, our demonstration cell can simulate failures in diverse areas, such as:

- Assembly errors due to the robotic arm: incorrectly positioned disks.
- Bearing damage on the conveyor belts: vibration changes in the conveyor belt motors.
- Resistance on the conveyor belts: temperature changes in the conveyor belt motors.

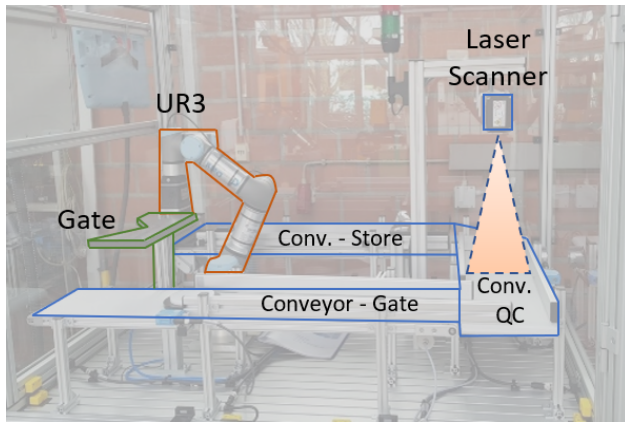


Fig. 1: The industry 4.0 demonstration cell at the University of Siegen

- Malfunction of the gate door due to leakage in the compressed air system: cylinder stroke at the assembly barrier is slower.
- Faster operating point: disks shift position due to the high belt speeds.
- Missing material at the end of the warehouse: production stop due to lack of material.

Those simulated failures have an impact on the data collected by the sensors. Anomalies can be observed at the vibration sensors, temperature rise, fluctuations in the air pressure system, noticeable shifting on pieces' position as well as the stop of the process.

The continuous data collection and the clear correlation between the machine parameters and the quality of the product, is the ideal play-ground to implement a sandbox for machine learning implementations. With this in mind, our goal is to predict the quality of the product (concentricity of the assembled parts), prior to the actual quality check done by the laser scanner.

## 4. Machine Learning Methods

To study which implementation would be more suitable for industrial applications, we compare Multilinear Perceptrons (MLPs), Support Vector Machines (SVM), as well as random forests on the task of quality prediction. All three will be introduced next.

### 4.1. Multilayer perceptrons

These feedforward neural networks typically combine multiple layers and activation functions [3]. A layer contains a large weight matrix and a bias vector. To evaluate the layer the input vector must be multiplied with the weight matrix before the bias vector is added. Each layer is typically followed by an activation function which adds non-linearity to the network graph. Rectified linear units (ReLUs) are zero for negative inputs leave positive inputs unchanged. ReLUs are the recommended activation function for modern neural networks [7] we use these

here as well. Since the linear parts of the ReLU and the linear matrix multiplication are differentiable we can employ gradient descent to train our classifier.

### 4.2. Support Vector Machines

Support Vector Machines (SVM) attempt to separate data along hyperplanes [1]. SVM offer a convex alternative to MLPs [19]. A convex classifier is guaranteed to converge to a global solution regardless of its initialization. Non-separable data can become separable if projected to a different possibly high dimensional space through a Kernel function. The Kernel trick allows SVM to solve some non-linear classification problems [19]. Radial basis functions (RBF) are commonly chosen as kernels [19], therefore, we choose to follow this practice as well.

### 4.3. Decision Tree

Decision trees are essentially binary trees, which work with the input features at the roots, decisions are made by moving up the tree to top leaves. At every branch in the tree, a decision is made, until one arrives at the decision [12]. For numerical input features, each decision partitions the data [1]. For example by comparison to a threshold value. To construct the tree these cutoff values have to be chosen at every branch. The construction problem turns into an optimization problem when a split criterion is introduced. Common choices are cross-entropy of Gini-coefficient [1]. During construction, the chosen function must be minimized.

## 5. Experiments

### 5.1. Data acquisition

Industrial projects require to work with a variety of sensors and controllers from different manufacturers. Thus, there is a risk of incompatibility between technologies. To avoid that problem, universal protocols are often implemented in industrial projects. This is the case for our industry 4.0 demonstration cell, which shares data via the protocol OPC-UA.

The Figure 3 describes a simplified version of the real connection diagram of the demonstration cell. In our case, the data is acquired independently from two OPC-UA servers. This represents the interaction between multiple servers in real production environments.

Before collecting the data, we need to find the variables of interest and mapping their source, as well as to determine the use cases of interest. Our study focussed on the data described in Table 1 and the six use cases described in Table 2. The data was manually collected by using the software "UAExpert - v1.5.1". Approximately 15 hours of data were collected in different sessions, while equally sampling each use case during the data acquisition stage.

| Data of interest | Server Source | Variable                                |
|------------------|---------------|---|
| Conveyor speed   | Siemens PLC   | Conveyor: Gate                          |
|                  |               | Conveyor: QC                            |
|                  |               | Conveyor: Store                         |
| UR3 Position     | Siemens PLC   | xyz Gripper position                    |
| Action Flags     | Siemens PLC   | UR3 gripper open/close                  |
|                  |               | Grab/drop disk based on disk type       |
| Quality control  | SICK SIM4000  | OK-NOK label                            |
|                  |               | xy disk deviation from the center point |
| Gate position    | SICK SIM4000  | Absolute disk deviation Position        |
|                  |               | Speed                                   |
|                  |               | Safe to go                              |
| Store            | SICK SIM4000  | Disk Size                               |

Table 1: Industry 4.0 demonstration cell: Relevant data linked with its reference source server.

| Use Case   | Description              |
|------------|--------------------------|
| Use Case 1 | Conveyor speed: Slow     |
| Use Case 2 | Robot position: OK       |
|            | Conveyor speed: Slow     |
| Use Case 3 | Robot position: NOK      |
|            | Conveyor speed: Fast     |
| Use Case 4 | Robot position: OK       |
|            | Conveyor speed: Fast     |
| Use Case 5 | Robot position: NOK      |
|            | Conveyor speed: Too Fast |
| Use Case 6 | Robot position: OK       |
|            | Conveyor speed: Too Fast |
|            | Robot position: NOK      |

Table 2: Industry 4.0 demonstration cell: Controlled Use-Cases. Use-Cases with the value *Robot position: NOK* and *Conveyor speed: Too Fast* will result in NOK pieces.

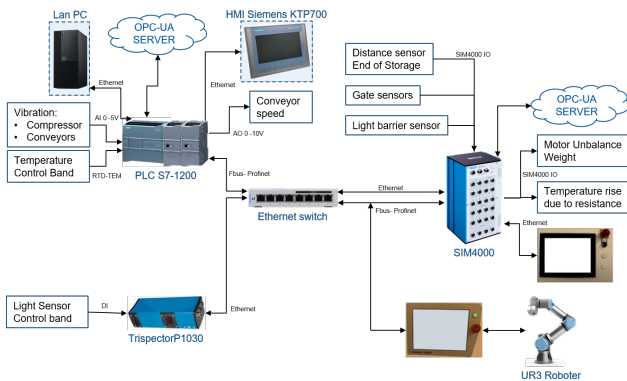


Fig. 2: Industry 4.0 demonstration cell: Connection diagram (simplified).

## 5.2. Data preprocessing

Once the data was collected, the next step was to clean the raw data and organize it accordingly [7]. In our case, that means to merge the data collected from the two OPC-UA servers, and synchronize the time-stamp. Since our systems were not completely synchronized, as common in practice, it was needed to calculate the delta-time between servers by referencing each server's base clock. Once the delta-time was determined, a time-stamp function was implemented to correct the time-shift between samples and be able to merge all the data without incompatibilities.

Data tags interpretation is an important step in the preprocessing process [7]. The raw data collected from the sensors is usually tagged by an alphanumeric code predefined by the sensor manufacturer. To work with the data, it was needed to implement diverse functions which have the task to clean the raw data in a more human-readable form. This means to remove samples out of clear boundaries and missing values, as well as to translate the sensor code tags based on human-readable words predefined by the authors. This last step, might be optional in other implementations, however, it proves to be a great addition for testing purposes.

Once the data is clean and compiled in one directory, the next step was to split the data based on the assembly cycle. For our purpose, we split the dataset into individual data-samples with help of the action tags included in the dataset Table 1. Subsequently, each data-sample is automatically checked for missing sensor values and discarded if so. At this point, we have a series of data-samples based on time series. However, we are not interested in a time series analysis, since having the time parameter would not necessarily improve the prediction results, but rather make the approach more complex, and more data would be needed, therefore it was needed to compress each time-series based data-sample into atemporal data-samples.

Each time-series sample collected is the result of data collected during one machine assembly cycle (MAC). The starting point of one MAC is the very first moment the robotic arm grabs the black disk from the store area and the ending point is before grabbing the next black disk in the same area. To eliminate time as a variable in our dataset, it was needed to acquire the data at specific moments of the MAC. For that reason, we defined a set of sampling-conditions that helped us to collect the relevant data during the MAC:

- Value of the robot position (xyz) while dropping both disks in the storage area
- Mean conveyor speed value per conveyor band
- Absolute deviation (xy) value at the quality control check
- Absolute quality control value: OK - NOK

Each time-series sample was evaluated based this sampling-condition, and the result of each evaluation was considered as our atemporal data-sample, which we used as the base for our classifier.



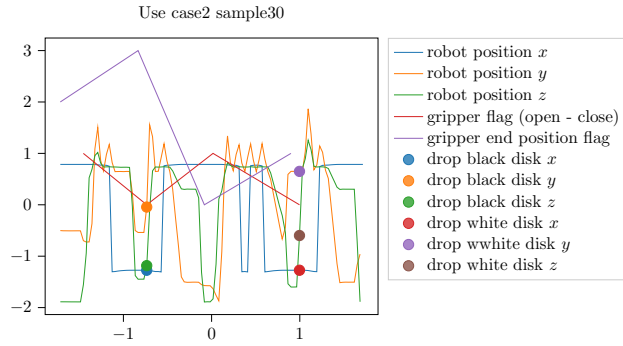


Fig. 3: Robot arm movement patterns. We show the movement of the cell's robot arm, its grippers, and the encoding of the overall position in the system. The changes in the grip flag are triggered, when the gripper opens or closes. 0 indicates an open, while one indicates a closed gripper. The position flags mark the state of the cell's arm. 0 means the black disk is in store, one that the black disk is at the gate, two that the white disk is in store and three that the white disk is located at the gate.

| Approach               | accuracy |
|------------------------|----------|
| Naïve-Baseline         | 64 %     |
| Support Vector Machine | 82 %     |
| Multilayer Perceptron  | 88 %     |
| Decision Tree          | 98 %     |

Table 3: Comparison of Support Vector Machine (SVM), Multilayer Perceptron and Random Forest classification on our anomaly detection task. The first row shows the performance of naively predicting a broken piece every time.

### 5.3. Classifier optimization and testing

The robot's position at disk drop is marked in Figure 3. The quality prediction problem is framed as a classification task. The input vectors which we feed into our classifiers consist of the arm positions at the disk drops for both disks in three dimensions, as well as the largest recorded belt speed of all three belts. The interpretation of the quality measurement is used as the training target. It can be OK or NOK which we encode as zero and one.

We work with a total of 528 measurements. Each containing arm and belt data logs of individual cell run. 50 samples are set aside at random for testing purposes, leaving 478 training samples. The random number generator seed is set to one to ensure the train and test set splits are identical for all experiments.

We compare a total of three different classifier architectures on the data. A Support Vector Machine (SVM), a Multilayer Perceptron (MLP) and a Random Forest structure. All three methods are trained using standard hyperparameters.<sup>1</sup>

**(AP: According to Prof. Garcke, we should stick either with "Random Forest" or with "Decision Tree". I would like you, Moritz, to decide what would be the best for this case.)**

Results are shown in table 3. For 32 of the total 50 test samples quality measurements indicate a problem. This sets the

|                  |     | True Values |             | Total       |
|------------------|-----|-------------|-------------|-------------|
|                  |     | OK          | NOK         |             |
| Predicted Values | OK  | 18          | 0           | 18 + 0 = 18 |
|                  | NOK | 8           | 24          | 8 + 24 = 32 |
| Total            |     | 18 + 8 = 26 | 0 + 24 = 24 | 50          |

(a) Support Vector Machine.

|                  |     | True Values |             | Total       |
|------------------|-----|-------------|-------------|-------------|
|                  |     | OK          | NOK         |             |
| Predicted Values | OK  | 18          | 0           | 18 + 0 = 18 |
|                  | NOK | 6           | 26          | 6 + 26 = 32 |
| Total            |     | 18 + 6 = 24 | 0 + 26 = 26 | 50          |

(b) Multilayer Perceptron.

|                  |     | True Values |             | Total       |
|------------------|-----|-------------|-------------|-------------|
|                  |     | OK          | NOK         |             |
| Predicted Values | OK  | 17          | 1           | 17 + 1 = 18 |
|                  | NOK | 0           | 32          | 0 + 32 = 32 |
| Total            |     | 17 + 0 = 17 | 1 + 32 = 33 | 50          |

(c) Decision Tree.

Table 4: Confusion matrices result of the prediction of 50 test data-points. We present the result of the predictions given by all three algorithms in detail based on the comparison between true values vs predictions. The tables read from the upper-left cell to the right-cell as: true-positive, false-positive, false-negative, true-negative.

baseline over the entire data set, which would be obtained by simply labeling all samples as faulty. Over the test set, we require to classify more than 64% of the data correctly. We would therefore expect any naive classifier to produce at least 64% accuracy, which we have to surpass. In Table 3, we observe that this is indeed the case for all three approaches evaluated here.

Based on the MLP prediction results presented on Table 4b show that even though the prediction model is not 100% accurate, the percentage of false-positive predictions is 0%. The false-negative results represent the 12% of the test sample and the true predictions constitute 88% of the test data.

The outcome of the models shows that the random forest performed best followed by the multilayer perceptron and the support vector machine. However, by reviewing the confusion matrices presented in Table 4, multilayer perceptron would be the preferred solution to be implemented in industrial applications due to the 0% ratio in false-positive results and high accuracy of 88%.

## 6. Conclusion

Based on the explorative literature review, we observed that the hundred percent quality check method proves to be the most efficient method to guarantee the final product quality, however, the high implementation cost is its biggest draw-back. On the other hand, we have the statistical methods, which are known to be fast and efficient, but the lack of reviewing each product until the next batch review might imply a considerable loss of the produced products whenever NOK products are found. This is based on the uncertainty of when did the error occur and how many products are affected.

By implementing ML models capable to predict the quality of the product, based on just the initial conditions of the pro-

<sup>1</sup> To allow exact reproduction of these results source code is available at <https://github.com/manubrain/Demo-Cell-Classification>

cess would be a great asset for the industrial processes. Within the limits of our work, we predict with 98% certainty the product quality by implementing a decision tree model with a 6-variables vector as input. However, our decision for industrial applications would be the MLP with 88% accuracy as to guarantee that all passed parts are OK and avoid labeling a NOK piece as OK. For further work, we expect to increase the accuracy of the prediction model by collecting more data-samples and experimenting with other, more complex, ML models.

It is important to state that this prediction model is not yet ready to fully replace the statistical methods, nor the hundred percent quality check method, since this research is still in its early stages and needs further development. However, a combination of SPC along prediction models could work well together, since the prediction model will evaluate each produced piece, and this might compensate for disadvantages of the statistical methods.

It is worth to mention the most important points learned during the project implementation. This might help as building blocks for further research in the area.

## 7. Lesson Learned

**Incompatibility between technologies;** devices configured on the same network presented troubles to share data due to network restrictions, as well as the limitation to access and modify restricted program-code given by the machine manufacture. To overcome the situation stated above, it was necessary to reprogram big sections of the machine control system.

**Data synchronization;** two OPC-UA servers were used on this implementation. This lead to a series of data synchronization problems due to differences in the internal clock of both servers. To solve the issue, it was needed to write a time-stamp synchronization script that was deployed during the data preprocessing phase. Without harmonious time-stamps, determining the production cycle would have been impossible and the input data for the ML model would have been useless, and the model inaccurate.

**Data interpretation;** this process is considered complicated, time-consuming, and a fundamental step for any ML applications. It is fundamental to understand the assembly process, the timing from the machine movements, the boundaries of the machine's sensors, as well a basic correlation within the presented data.

**Missing values;** to minimize the risk of false results delivered by the ML model, it would be compulsory to carefully review the ML input data. Missing values can have a great impact on the ML prediction, that is the reason why we deliberately review all the input data and validate it with the expected output from the diverse sensors. Whenever there was missing data, and as long as we did not fabricate data, we employed statistical methods to fill the data gap.

**Adapting the industry 4.0 demonstration cell;** the initial state of the demonstrator was very limited. Even though the process was well known, the lack of labels or flags whenever certain actions occur, made it complicated to have accurate data

sampling from each assembly cycle. To overcome this uncertainty, we modified the machine program to raise specific flags whenever certain actions were executed.

**Machine Learning;** careful measurement and meaningful preprocessing of our cell-data was key to the successful application of all three algorithms. Without the labels, the problem could not have been framed as a supervised classification problem.

**Dataset size;** as the starting point we collected as many data points as the ones found in the iris Dataset [6]. The next step was to collect batches of data of around 30 minutes per use case. This process was repeated until accumulate around 15 hours of data.

## Acknowledgments

This work was funded by the European Regional Development Fund (ERDF) within the project "ManuBrain".

## References

- [1] Aggarwal, C.C., 2014. Data classification.
- [2] Aumi, S., Corbett, B., P., M., 2012. Model predictive quality control of batch processes. American Control Conference .
- [3] Bishop, C.M., 2006. Pattern recognition and machine learning. springer.
- [4] Delen, D., Demirkan, H., 2013. Data, information and analytics as services. Decision Support Systems 55.
- [5] Escobar, C.A., Morales-Menendez, R., 2018. Machine learning techniques for quality control in high conformance manufacturing environment. Advances in Mechanical Engineering 10, 1687814018755519. URL: <https://doi.org/10.1177/1687814018755519>, doi:10.1177/1687814018755519, arXiv:<https://doi.org/10.1177/1687814018755519>.
- [6] Fisher, R.A., 1936. The use of multiple measurements in taxonomic problems. Annals of Eugenics 7, 179–188. doi:10.1111/j.1469-1809.1936.tb02137.x.
- [7] Goodfellow, I., Bengio, Y., Courville, A., Bengio, Y., 2016. Deep learning. volume 1. MIT press Cambridge.
- [8] Hinkley, C.M., 1997. Defining the best quality-control systems by design and inspection. Clinical Chemistry 43, 873–879. URL: <https://doi.org/10.1093/clinchem/43.5.873>, doi:10.1093/clinchem/43.5.873.
- [9] Illés, B., Tamás, P., Dobos, P., Skapinyecz, R., 2017. New challenges for quality assurance of manufacturing processes in industry 4.0. Solid State Phenomena 261.
- [10] Krauß, J., Dorißen, J., Mende, H., Frye, M., Schmitt, R., 2019. Machine learning and artificial intelligence in production: Application areas and publicly available data sets. Production at the leading edge of technology 9.
- [11] Krauß, J., Pacheco, B.M., Zang, H.M., Schmitt, R., 2020. Automated machine learning for predictive quality in production. Procedia CIRP 93.
- [12] Marsland, S., 2015. Machine learning: An algorithmic perspective.
- [13] Mitra, A., 2016. Fundamentals of Quality Control and Improvement. wiley.
- [14] Ritter, C., Schweitzer, F., 1992. Neue wegene der prozeßmodellierung für die rechnergestützte qualitätsvorhersage und -sicherung in der spanplattenfertigung. Holz als Roh- und Werkstoff 50.
- [15] Robinson, H., 2011. Using poka-yoke techniques for early defect detection.
- [16] Sandoval-Chávez, D.A., Beruvides, M.G., 1998. Using opportunity costs to determine the cost of quality: A case study in a continuous-process industry. The Engineering Economist 43, 107–124. doi:10.1080/00137919808903192.

- [17] Selvamuthu, D., Das, D., 2018. Introduction to Statistical Methods, Design of Experiments and Statistical Quality Control. Springer Nature Singapore Pte Ltd.
- [18] Sohnus, F., Schlegel, P., Ellerich, M., Schmitt, R.H., 2019. Data-driven prediction of surface quality in fused deposition modeling using machine learning, in: Wulfsberg, J.P., Hintze, W., Behrens, B.A. (Eds.), *Production at the leading edge of technology*, Springer Berlin Heidelberg, Berlin, Heidelberg, pp. 473–481.
- [19] Suykens, J.A., Van Gestel, T., De Brabanter, J., De Moor, B., Vandewalle, J.P., 2002. *Least squares support vector machines*. World scientific.