



gem5 Neoverse-V2 FDP

EVES + VTAGE, FEAT_SB; AES-256-GCM secret lane, 64 B, real `sb`

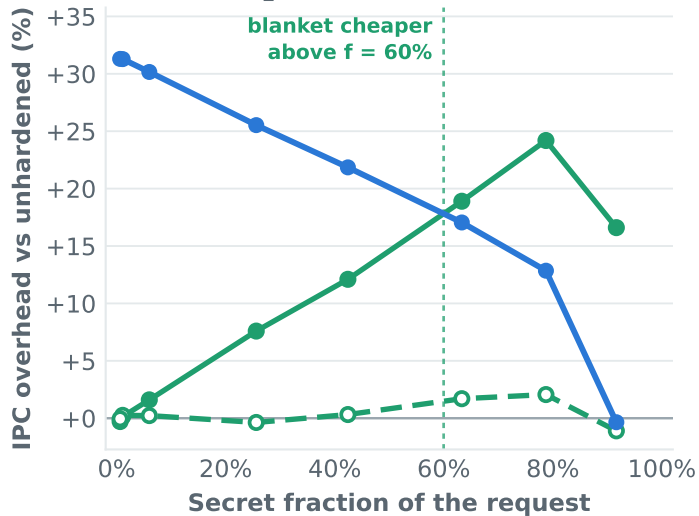

Apple M4 — shipping silicon

36-bit load value predictor, measured; AES-256-GCM secret lane, 64 B

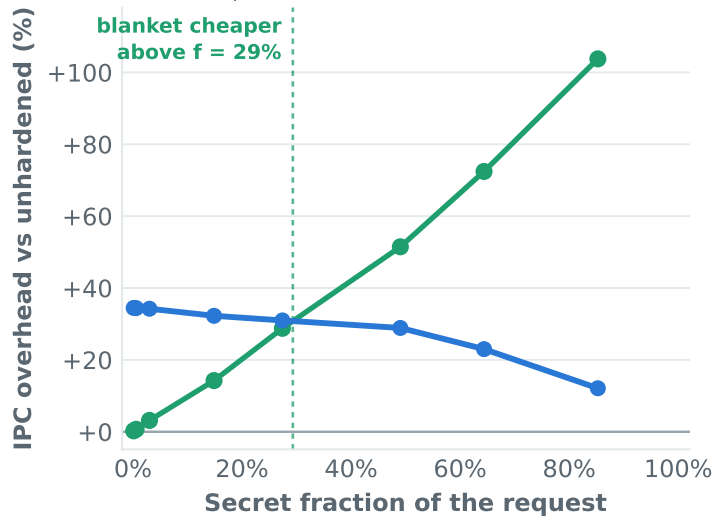

- blanket DIT
- Apple's bracket (mrs DIT, msr #1, sb, call, restore) — flush-after switch (--apple)
- the same bracket under the renamed switch (--expedite, gem5 only)