




USB-C CONNECTOR

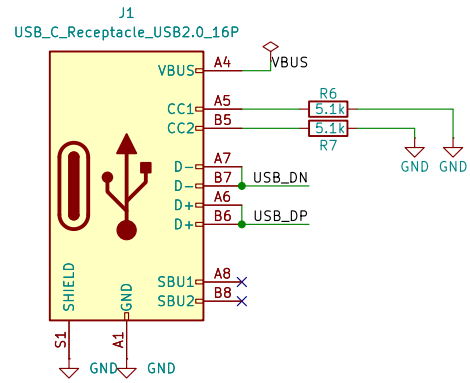


BATTERY CHARGER AND FLOW CONTROL

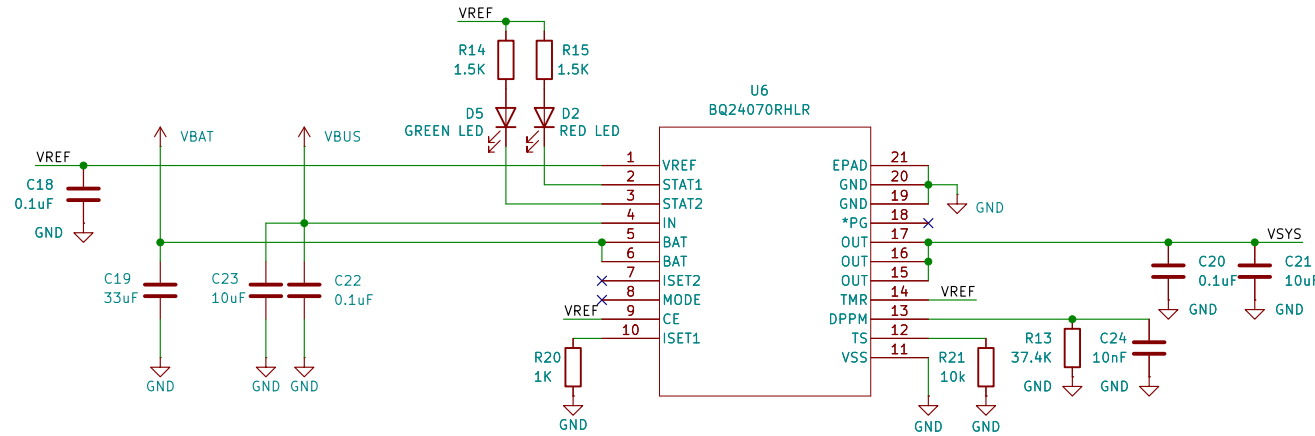


VSYS TO 3V3 REG

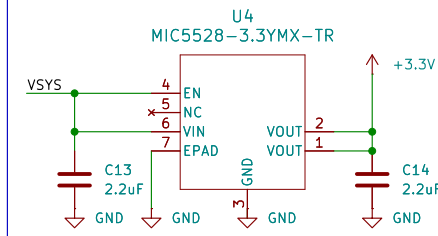


BATTERY MONITORING CIRCUIT

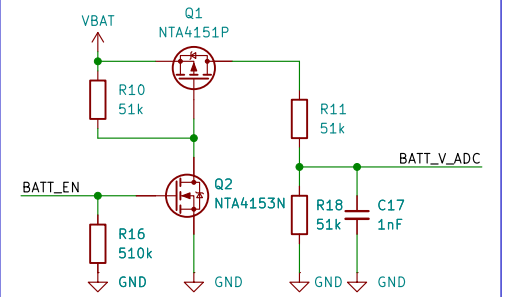

MICROCONTROLLER

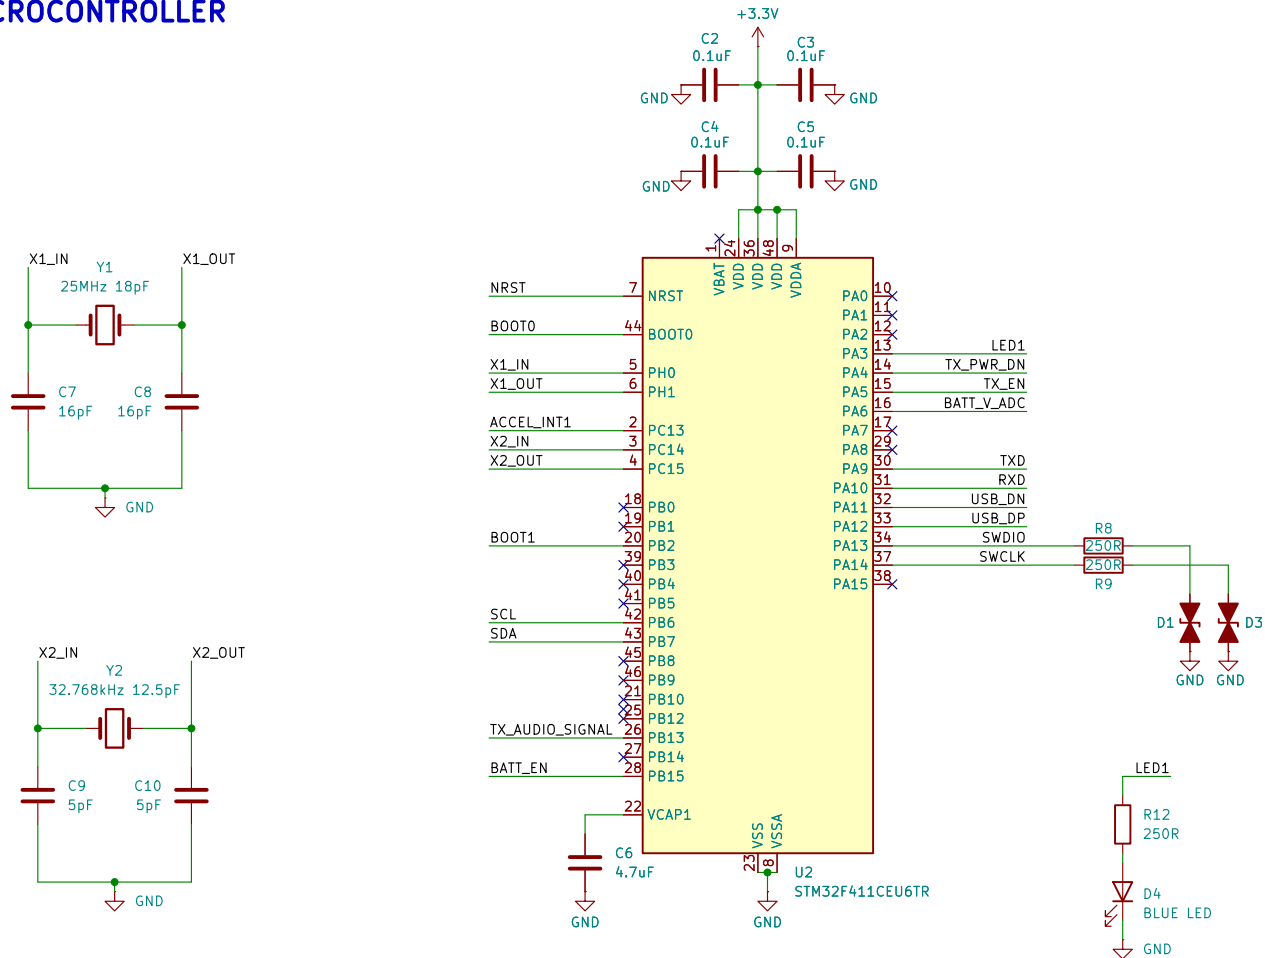


SA868S TRANSMITTER

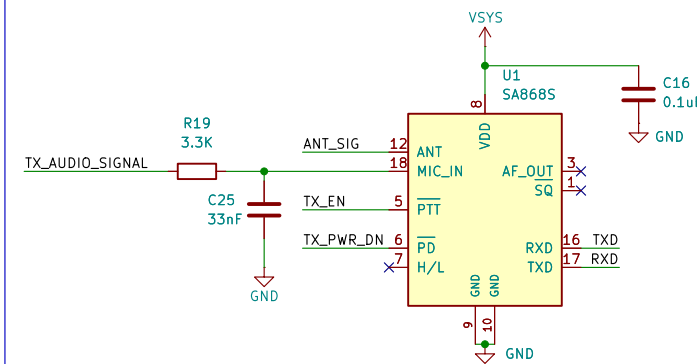


UART Baud Rate 9600

ANTENNA INPUT




Pads are plated mounting holes used as RF feed and GND clamp for fabric antenna. No connector installed


BATTERY CONNECTOR



SWD CONNECTOR




ACCELEROMETER

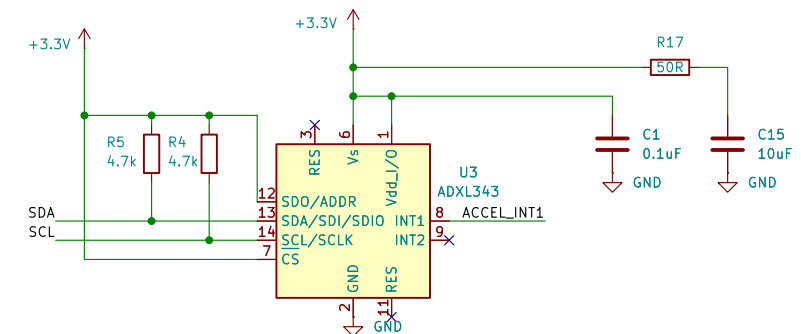


With the ALT ADDRESS pin high, the 7-bit I2C address for the device is 0x1D, followed by the R/W bit. This translates to 0x3A for a write and 0x3B for a read


BOOT CIRCUIT

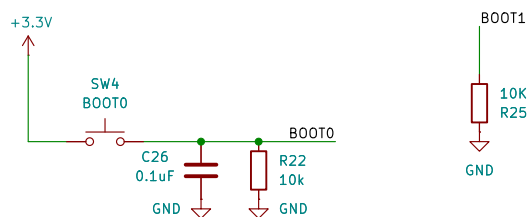

RESET CIRCUIT



TEST POINTS



Sheet: /

File: Beacon_and_eggs.kicad_sch

Title:

Size: A3

Date:

Rev:

KiCad E.D.A. 10.0.6

Id: 1/1