

# 1. Description

# 1.1. Project

Project Name	RoboSoccer_F767ZI
Board Name	NUCLEO-F767ZI
Generated with:	STM32CubeMX 6.9.2
Date	07/07/2025


# 1.2. MCU

MCU Series	STM32F7
MCU Line	STM32F7x7
MCU name	STM32F767ZITx
MCU Package	LQFP144
MCU Pin number	144

# 1.3. Core(s) information

Core(s)	Arm Cortex-M7

# 2. Pinout Configuration

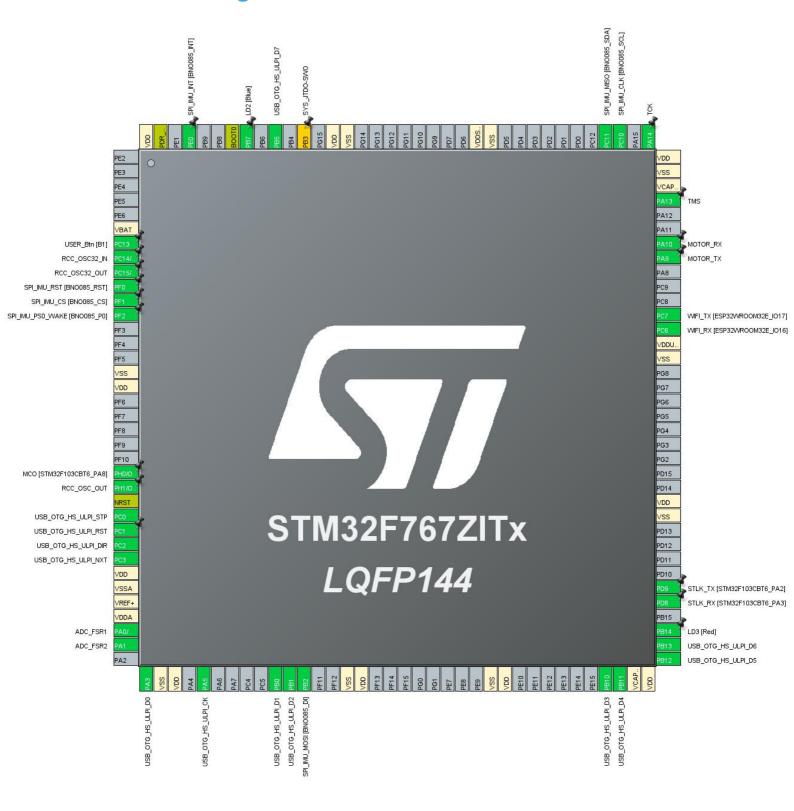

# 3. Pins Configuration

Pin Number	Pin Name	Pin Type	Alternate	Label
LQFP144	(function after		Function(s)	
	reset)			
6	VBAT	Power		
7	PC13	I/O	GPIO_EXTI13	USER_Btn [B1]
8	PC14/OSC32_IN	I/O	RCC_OSC32_IN	
9	PC15/OSC32_OUT	I/O	RCC_OSC32_OUT	
10	PF0 *	I/O	GPIO_Output	SPI_IMU_RST [BNO085_RST]
11	PF1 *	I/O	GPIO_Output	SPI_IMU_CS [BNO085_CS]
12	PF2 *	I/O	GPIO_Output	SPI_IMU_PS0_WAKE [BNO085_P0]
16	VSS	Power		
17	VDD	Power		
23	PH0/OSC_IN	I/O	RCC_OSC_IN	MCO [STM32F103CBT6_PA8]
24	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
25	NRST	Reset		
26	PC0	I/O	USB_OTG_HS_ULPI_STP	
27	PC1 *	I/O	GPIO_Output	USB_OTG_HS_ULPI_RST
28	PC2	I/O	USB_OTG_HS_ULPI_DIR	
29	PC3	I/O	USB_OTG_HS_ULPI_NXT	
30	VDD	Power		
31	VSSA	Power		
32	VREF+	Power		
33	VDDA	Power		
34	PA0/WKUP	I/O	ADC1_IN0	ADC_FSR1
35	PA1	I/O	ADC1_IN1	ADC_FSR2
37	PA3	I/O	USB_OTG_HS_ULPI_D0	
38	VSS	Power		
39	VDD	Power		
41	PA5	I/O	USB_OTG_HS_ULPI_CK	
46	PB0	I/O	USB_OTG_HS_ULPI_D1	
47	PB1	I/O	USB_OTG_HS_ULPI_D2	
48	PB2	I/O	SPI3_MOSI	SPI_IMU_MOSI [BNO085_DI]
51	VSS	Power		
52	VDD	Power		
61	VSS	Power		


Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
62	VDD	Dower		
62		Power	LICE OTO LIC LILE DO	
69	PB10	1/0	USB_OTG_HS_ULPI_D3	
70	PB11	I/O	USB_OTG_HS_ULPI_D4	
71	VCAP_1	Power		
72	VDD	Power	HOD OTO HO HI DI DE	
73	PB12	1/0	USB_OTG_HS_ULPI_D5	
74	PB13	1/0	USB_OTG_HS_ULPI_D6	1 D0 [D - 4]
75	PB14 *	1/0	GPIO_Output	LD3 [Red]
77	PD8	I/O	USART3_TX	STLK_RX [STM32F103CBT6_PA3]
78	PD9	I/O	USART3_RX	STLK_TX [STM32F103CBT6_PA2]
83	VSS	Power		
84	VDD	Power		
94	VSS	Power		
95	VDDUSB	Power		
96	PC6	I/O	USART6_TX	WIFI_RX [ESP32WROOM32E_IO16]
97	PC7	I/O	USART6_RX	WIFI_TX [ESP32WROOM32E_IO17]
101	PA9	I/O	USART1_TX	MOTOR_TX
102	PA10	I/O	USART1_RX	MOTOR_RX
105	PA13	I/O	SYS_JTMS-SWDIO	TMS
106	VCAP_2	Power		
107	VSS	Power		
108	VDD	Power		
109	PA14	I/O	SYS_JTCK-SWCLK	TCK
111	PC10	I/O	SPI3_SCK	SPI_IMU_CLK [BNO085_SCL]
112	PC11	I/O	SPI3_MISO	SPI_IMU_MISO [BNO085_SDA]
120	VSS	Power		
121	VDDSDMMC	Power		
130	VSS	Power		
131	VDD	Power		
133	PB3 **	I/O	SYS_JTDO-SWO	
135	PB5	I/O	USB_OTG_HS_ULPI_D7	
137	PB7 *	I/O	GPIO_Output	LD2 [Blue]
138	BOOT0	Boot		
141	PE0	I/O	GPIO_EXTI0	SPI_IMU_INT [BNO085_INT]

Pin Number LQFP144	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
143	PDR_ON	Reset		
144	VDD	Power		

<sup>\*</sup> The pin is affected with an I/O function

<sup>\*\*</sup> The pin is affected with a peripheral function but no peripheral mode is activated

# 4. Clock Tree Configuration

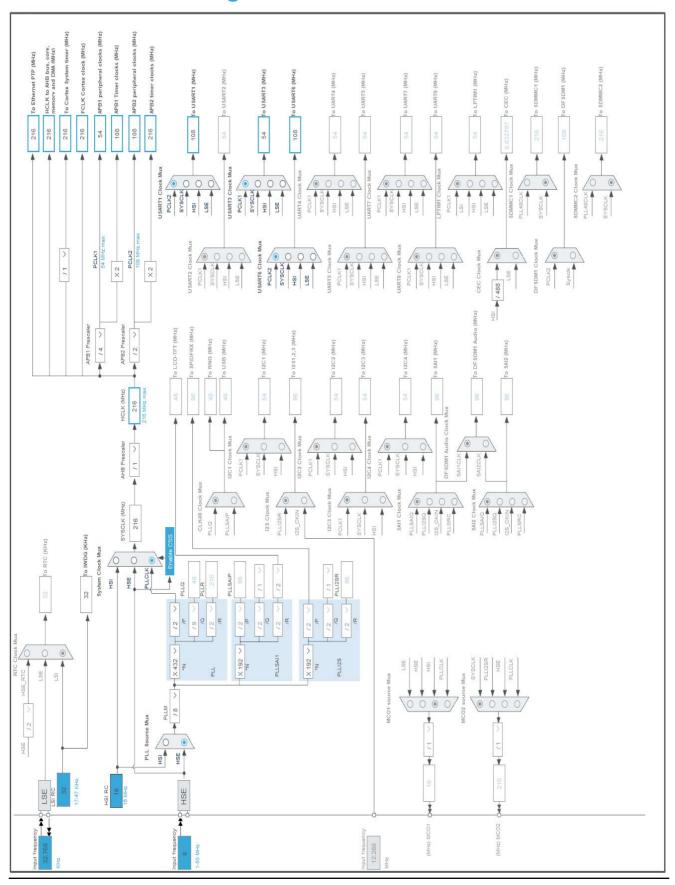

# 5. Software Project

# 5.1. Project Settings

Name	Value
Project Name	RoboSoccer_F767ZI
Project Folder	C:\Users\Bowen\Documents\UW_Files\Proj\RoboSoccer_F767ZI
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F7 V1.17.3
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

# 5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	Yes
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power	No
consumption)	
Enable Full Assert	No

# 5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_USART3_UART_Init	USART3
5	MX_ADC1_Init	ADC1
6	MX_TIM2_Init	TIM2
7	MX_SPI3_Init	SPI3
8	MX_USART1_UART_Init	USART1
9	MX_IWDG_Init	IWDG
10	MX_USB_DEVICE_Init	USB_DEVICE
11	MX_USART6_UART_Init	USART6

RoboSoccer_F767ZI Project Configuration Report

# 1. Power Consumption Calculator report

# 1.1. Microcontroller Selection

Series	STM32F7
Line	STM32F7x7
мси	STM32F767ZITx
Datasheet	DS11532_Rev4

# 1.2. Parameter Selection

Temperature	25
Vdd	3.3

# 1.3. Battery Selection

Battery	Alkaline(9V)	
Capacity	625.0 mAh	
Self Discharge	0.3 %/month	
Nominal Voltage	9.0 V	
Max Cont Current	200.0 mA	
Max Pulse Current	0.0 mA	
Cells in series	1	
Cells in parallel	1	


# 1.4. Sequence

04-22	014	01 0
Step	Step1	Step2
Mode	RUN	STOP UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	ICTM FLASH-SingleBank REGON	n/a
CPU Frequency	216 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	118 mA	130 µA
Duration	0.1 ms	0.9 ms
DMIPS	462.0	0.0
Ta Max	89.42	104.98
Category	In DS Table	In DS Table

# 1.5. Results

Sequence Time	1 ms	Average Current	11.92 mA
Battery Life	2 days, 4 hours	Average DMIPS	462.24005
			DMIPS

# 1.6. Chart

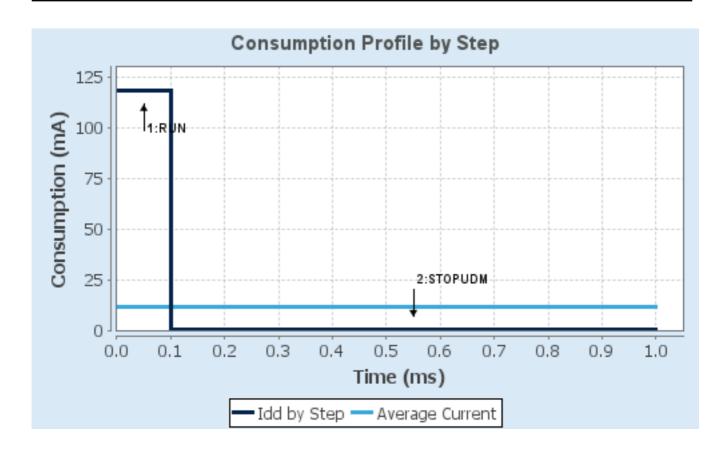

# 2. Peripherals and Middlewares Configuration

2.1. ADC1 mode: IN0 mode: IN1

## 2.1.1. Parameter Settings:

ADCs_Common_Settings:	<b>ADC</b>	s Com	ımon S	Settings:
-----------------------	------------	-------	--------	-----------

Mode Independent mode

ADC\_Settings:

Clock Prescaler PCLK2 divided by 4

Resolution 12 bits (15 ADC Clock cycles)

Data Alignment Right alignment

Scan Conversion Mode Enabled

Continuous Conversion Mode Disabled

Discontinuous Conversion Mode Disabled

DMA Continuous Requests Enabled \*

End Of Conversion Selection EOC flag at the end of single channel conversion

ADC Regular ConversionMode:

Number Of Conversion 2 \*

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None
Rank 1

Channel 0

Sampling Time 480 Cycles \*

<u>Rank</u> 2 \*

Channel 1 \*
Sampling Time 480 Cycles \*

ADC\_Injected\_ConversionMode:

Number Of Conversions 0

WatchDog:

Enable Analog WatchDog Mode false

2.2. **IWDG** 

mode: Activated

2.2.1. Parameter Settings:

**Watchdog Clocking:** 

IWDG counter clock prescaler
IWDG window value
IWDG down-counter reload value
32 \*
4095
IWDG down-counter reload value
999 \*

#### 2.3. RCC

High Speed Clock (HSE): BYPASS Clock Source Low Speed Clock (LSE): Crystal/Ceramic Resonator

# 2.3.1. Parameter Settings:

### **System Parameters:**

VDD voltage (V) 3.3

Flash Latency(WS) 7 WS (8 CPU cycle)

**RCC Parameters:** 

HSI Calibration Value 16

TIM Prescaler Selection Disabled

HSE Startup Timout Value (ms) 100

LSE Startup Timout Value (ms) 5000

**Power Parameters:** 

Power Over Drive Enabled

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

## 2.4. SPI3

# Mode: Full-Duplex Master 2.4.1. Parameter Settings:

## **Basic Parameters:**

Frame Format Motorola

Data Size 8 Bits \*

First Bit MSB First

**Clock Parameters:** 

Prescaler (for Baud Rate) 32 \*

Baud Rate 1.6875 MBits/s \*

Clock Polarity (CPOL) High \*
Clock Phase (CPHA) 2 Edge \*

**Advanced Parameters:** 

CRC Calculation Disabled

NSS Signal Type Software

2.5. SYS

**Debug: Serial Wire** 

**Timebase Source: TIM6** 

2.6. TIM2

Clock Source: Internal Clock

2.6.1. Parameter Settings:

**Counter Settings:** 

Prescaler (PSC - 16 bits value) 107 \*
Counter Mode Up

Counter Period (AutoReload Register - 32 bits value ) 0xFFFFFFF
Internal Clock Division (CKD) No Division
auto-reload preload Disable

**Trigger Output (TRGO) Parameters:** 

Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

Trigger Event Selection TRGO Reset (UG bit from TIMx\_EGR)

2.7. USART1

**Mode: Asynchronous** 

2.7.1. Parameter Settings:

**Basic Parameters:** 

Baud Rate 1000000 \*

Word Length 8 Bits (including Parity)

Parity None Stop Bits 1

**Advanced Parameters:** 

Data Direction Receive and Transmit

Over Sampling 16 Samples
Single Sample Disable

**Advanced Features:** 

Auto Baudrate Disable

TX Pin Active Level Inversion Disable

RX Pin Active Level Inversion Disable
Data Inversion Disable
TX and RX Pins Swapping Disable
Overrun Enable
DMA on RX Error Enable
MSB First Disable

#### 2.8. **USART3**

## **Mode: Asynchronous**

## 2.8.1. Parameter Settings:

## **Basic Parameters:**

Baud Rate 115200

Word Length 8 Bits (including Parity)

Parity None Stop Bits 1

#### **Advanced Parameters:**

Data Direction Receive and Transmit

Over Sampling 16 Samples
Single Sample Disable

#### **Advanced Features:**

Auto Baudrate Disable Disable TX Pin Active Level Inversion Disable **RX Pin Active Level Inversion** Disable Data Inversion Disable TX and RX Pins Swapping Overrun Enable DMA on RX Error Enable MSB First Disable

#### 2.9. **USART6**

# Mode: Asynchronous

## 2.9.1. Parameter Settings:

## **Basic Parameters:**

Baud Rate 115200

Word Length 8 Bits (including Parity)

Parity None

Stop Bits 1

**Advanced Parameters:** 

Data Direction Receive and Transmit

Over Sampling 16 Samples
Single Sample Disable

**Advanced Features:** 

Auto Baudrate Disable TX Pin Active Level Inversion Disable **RX Pin Active Level Inversion** Disable Data Inversion Disable Disable TX and RX Pins Swapping Overrun Enable DMA on RX Error Enable MSB First Disable

## 2.10. USB\_OTG\_HS

## **External Phy: Device\_Only**

## 2.10.1. Parameter Settings:

Speed Device High Speed 480MBit/s

Enable internal IP DMA

Physical interface

External Phy
Low power

Disabled

Link Power Management

Use dedicated end point 1 interrupt

VBUS sensing

Disabled

Signal start of frame

Disabled

Disabled

## **2.11. FREERTOS**

Interface: CMSIS\_V2

## 2.11.1. Config parameters:

API:

FreeRTOS API CMSIS v2

**Versions:** 

FreeRTOS version 10.2.1 CMSIS-RTOS version 2.00

MPU/FPU:

ENABLE\_MPU Disabled ENABLE\_FPU Disabled

Kernel settings:

USE\_PREEMPTION Enabled

CPU\_CLOCK\_HZ SystemCoreClock

1000 TICK\_RATE\_HZ MAX\_PRIORITIES 56 128 MINIMAL\_STACK\_SIZE MAX\_TASK\_NAME\_LEN 16 USE\_16\_BIT\_TICKS Disabled IDLE\_SHOULD\_YIELD Enabled Enabled USE\_MUTEXES USE\_RECURSIVE\_MUTEXES Enabled Enabled USE\_COUNTING\_SEMAPHORES QUEUE\_REGISTRY\_SIZE 8 USE\_APPLICATION\_TASK\_TAG Disabled ENABLE\_BACKWARD\_COMPATIBILITY Enabled USE\_PORT\_OPTIMISED\_TASK\_SELECTION Disabled Disabled USE\_TICKLESS\_IDLE USE\_TASK\_NOTIFICATIONS Enabled

Memory management settings:

RECORD\_STACK\_HIGH\_ADDRESS

Memory Allocation Dynamic / Static

Enabled \*

TOTAL\_HEAP\_SIZE 15360

Memory Management scheme heap\_4

**Hook function related definitions:** 

USE\_IDLE\_HOOK Enabled \*
USE\_TICK\_HOOK Disabled
USE\_MALLOC\_FAILED\_HOOK Disabled
USE\_DAEMON\_TASK\_STARTUP\_HOOK Disabled
CHECK\_FOR\_STACK\_OVERFLOW Option2 \*

Run time and task stats gathering related definitions:

GENERATE\_RUN\_TIME\_STATS

USE\_TRACE\_FACILITY

USE\_STATS\_FORMATTING\_FUNCTIONS

Enabled \*

Co-routine related definitions:

USE\_CO\_ROUTINES Disabled MAX\_CO\_ROUTINE\_PRIORITIES 2

Software timer definitions:

USE\_TIMERS Enabled
TIMER\_TASK\_PRIORITY 2

TIMER\_QUEUE\_LENGTH 10
TIMER\_TASK\_STACK\_DEPTH 256

#### Interrupt nesting behaviour configuration:

LIBRARY\_LOWEST\_INTERRUPT\_PRIORITY 15
LIBRARY\_MAX\_SYSCALL\_INTERRUPT\_PRIORITY 5

#### Added with 10.2.1 support:

MESSAGE\_BUFFER\_LENGTH\_TYPE size\_t
USE\_POSIX\_ERRNO Disabled

## 2.11.2. Include parameters:

#### Include definitions:

vTaskPrioritySet Enabled uxTaskPriorityGet Enabled vTaskDelete Enabled vTaskCleanUpResources Disabled vTaskSuspend Enabled vTaskDelayUntil Enabled Enabled vTaskDelay xTaskGetSchedulerState Enabled xTaskResumeFromISR Enabled Enabled xQueueGetMutexHolder xSemaphoreGetMutexHolder Disabled Disabled pcTaskGetTaskName Enabled uxTaskGetStackHighWaterMark xTaskGetCurrentTaskHandle Disabled Enabled eTaskGetState Disabled xEventGroupSetBitFromISR xTimerPendFunctionCall Enabled Disabled xTaskAbortDelay Disabled xTaskGetHandle Disabled uxTaskGetStackHighWaterMark2

## 2.11.3. Advanced settings:

Newlib settings (see parameter description first):

USE\_NEWLIB\_REENTRANT Enabled \*

Project settings (see parameter description first):

Use FW pack heap file Enabled

#### 2.12. USB\_DEVICE

## Class For HS IP: Communication Device Class (Virtual Port Com)

## 2.12.1. Parameter Settings:

#### **Basic Parameters:**

USBD\_MAX\_NUM\_INTERFACES (Maximum number of supported interfaces)

1
USBD\_MAX\_NUM\_CONFIGURATION (Maximum number of supported configuration)

1
USBD\_MAX\_STR\_DESC\_SIZ (Maximum size for the string descriptors)

512
USBD\_SELF\_POWERED (Enabled self power)

Enabled

USBD\_DEBUG\_LEVEL (USBD Debug Level) 0: No debug message

USBD\_LPM\_ENABLED (Link Power Management) 1: Link Power Management supported

**Class Parameters:** 

USB CDC Rx Buffer Size 2048
USB CDC Tx Buffer Size 2048

### 2.12.2. Device Descriptor:

#### **Device Descriptor:**

VID (Vendor IDentifier) 1155

LANGID\_STRING (Language Identifier) English(United States)

MANUFACTURER\_STRING (Manufacturer Identifier) STMicroelectronics

**Device Descriptor HS:** 

PID (Product IDentifier) 22336

PRODUCT\_STRING (Product Identifier) STM32 Virtual ComPort

CONFIGURATION\_STRING (Configuration Identifier)

INTERFACE\_STRING (Interface Identifier)

CDC Interface

CDC Interface

<sup>\*</sup> User modified value

# 3. System Configuration

# 3.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0/WKUP	ADC1_IN0	Analog mode	No pull-up and no pull-down	n/a	ADC_FSR1
	PA1	ADC1_IN1	Analog mode	No pull-up and no pull-down	n/a	ADC_FSR2
RCC	PC14/OSC3 2_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15/OSC3 2_OUT	RCC_OSC32_O UT	n/a	n/a	n/a	
	PH0/OSC_I	RCC_OSC_IN	n/a	n/a	n/a	MCO [STM32F103CBT6_PA8]
	PH1/OSC_O UT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI3	PB2	SPI3_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High	SPI_IMU_MOSI [BNO085_DI]
	PC10	SPI3_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High	SPI_IMU_CLK [BNO085_SCL]
	PC11	SPI3_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High	SPI_IMU_MISO [BNO085_SDA]
SYS	PA13	SYS_JTMS- SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK- SWCLK	n/a	n/a	n/a	тск
USART1	PA9	USART1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	MOTOR_TX
	PA10	USART1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	MOTOR_RX
USART3	PD8	USART3_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	STLK_RX [STM32F103CBT6_PA3]
	PD9	USART3_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	STLK_TX [STM32F103CBT6_PA2]
USART6	PC6	USART6_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	WIFI_RX [ESP32WROOM32E_IO16
	PC7	USART6_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High	WIFI_TX [ESP32WROOM32E_IO17 ]
USB_OTG_ HS	PC0	USB_OTG_HS_ ULPI_STP	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PC2	USB_OTG_HS_	Alternate Function Push Pull	No pull-up and no pull-down	Very High	

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
		ULPI_DIR		down	Ороса	
	PC3	USB_OTG_HS_ ULPI_NXT	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PA3	USB_OTG_HS_ ULPI_D0	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PA5	USB_OTG_HS_ ULPI_CK	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB0	USB_OTG_HS_ ULPI_D1	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB1	USB_OTG_HS_ ULPI_D2	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB10	USB_OTG_HS_ ULPI_D3	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB11	USB_OTG_HS_ ULPI_D4	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB12	USB_OTG_HS_ ULPI_D5	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB13	USB_OTG_HS_ ULPI_D6	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
	PB5	USB_OTG_HS_ ULPI_D7	Alternate Function Push Pull	No pull-up and no pull-down	Very High	
Single Mapped Signals	PB3	SYS_JTDO- SWO	n/a	n/a	n/a	
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	USER_Btn [B1]
	PF0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SPI_IMU_RST [BNO085_RST]
	PF1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Very High	SPI_IMU_CS [BNO085_CS]
	PF2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	SPI_IMU_PS0_WAKE [BNO085_P0]
	PC1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	USB_OTG_HS_ULPI_RST
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD3 [Red]
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Blue]
	PE0	GPIO_EXTI0	External Interrupt Mode with Falling	Pull-up *	n/a	SPI_IMU_INT [BNO085_INT]
			edge trigger detection			

# 3.2. DMA configuration

DMA request	Stream	Direction	Priority
ADC1	DMA2_Stream0	Peripheral To Memory	Medium *

# ADC1: DMA2\_Stream0 DMA request Settings:

Mode: Circular \*
Use fifo: Disable
Peripheral Increment: Disable
Memory Increment: Enable \*
Peripheral Data Width: Half Word
Memory Data Width: Half Word

# 3.3. NVIC configuration

# 3.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	15	0
System tick timer	true	15	0
EXTI line0 interrupt	true	4	0
USART1 global interrupt	true	5	0
USART3 global interrupt	true	5	0
SPI3 global interrupt	true	5	0
TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts	true	15	0
DMA2 stream0 global interrupt	true	5	0
USB On The Go HS global interrupt	true	5	0
PVD interrupt through EXTI line 16		unused	
Flash global interrupt		unused	
RCC global interrupt		unused	
ADC1, ADC2 and ADC3 global interrupts		unused	
TIM2 global interrupt		unused	
EXTI line[15:10] interrupts	unused		
USART6 global interrupt	unused		
USB On The Go HS End Point 1 Out global interrupt	unused		
USB On The Go HS End Point 1 In global interrupt	unused		
FPU global interrupt		unused	

# 3.3.2. NVIC Code generation


Enabled interrupt Table	Select for init	Generate IRQ	Call HAL handler
	sequence ordering	handler	
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
System service call via SWI instruction	false	false	false
Debug monitor	false	true	false
Pendable request for system service	false	false	false
System tick timer	false	false	true
EXTI line0 interrupt	false	true	true
USART1 global interrupt	false	true	true
USART3 global interrupt	false	true	true
SPI3 global interrupt	false	true	true
TIM6 global interrupt, DAC1 and DAC2 underrun error interrupts	false	true	true
DMA2 stream0 global interrupt	false	true	true
USB On The Go HS global interrupt	false	true	true

<sup>\*</sup> User modified value

# 4. System Views

- 4.1. Category view
- 4.1.1. Current

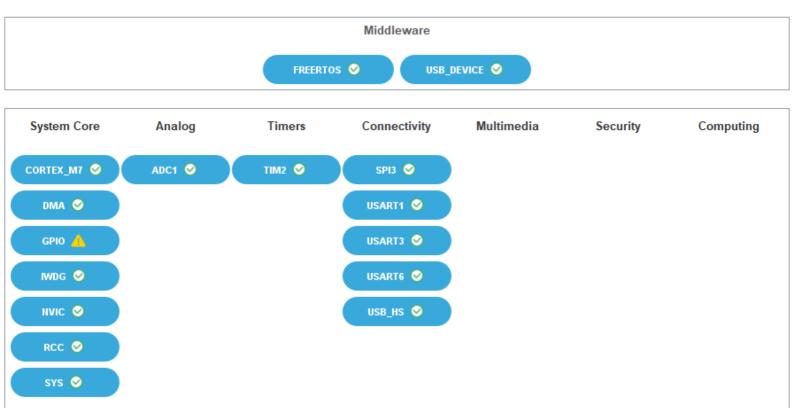

# 5. Docs & Resources

Type Link

BSDL files https://www.st.com/resource/en/bsdl\_model/stm32f7\_bsdl.zip

IBIS models https://www.st.com/resource/en/ibis\_model/stm32f7\_ibis.zip

System View https://www.st.com/resource/en/svd/stm32f7-svd.zip

Description

Presentations https://www.st.com/resource/en/product\_presentation/stm32-

stm8\_embedded\_software\_solutions.pdf

Presentations https://www.st.com/resource/en/product\_presentation/stm32\_eval-

tools\_portfolio.pdf

Presentations https://www.st.com/resource/en/product\_presentation/stm32\_stm8\_functi

onal-safety-packages.pdf

Presentations https://www.st.com/resource/en/product\_presentation/stm32-

stm8\_software\_development\_tools.pdf

Presentations https://www.st.com/resource/en/product\_presentation/microcontrollers-

stm32-family-overview.pdf

Brochures https://www.st.com/resource/en/brochure/products-and-solutions-for-plcs-

and-smart-i-os.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32nucleo.pdf

Flyers https://www.st.com/resource/en/flyer/flstm32trust.pdf

Application Notes https://www.st.com/resource/en/application note/an1709-emc-design-

guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an2606-stm32-

microcontroller-system-memory-boot-mode-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an3126-audio-and-

waveform-generation-using-the-dac-in-stm32-products-

stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an3154-can-protocol-

used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an3155-usart-protocol-

used-in-the-stm32-bootloader-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application\_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4031-using-the-stm32f2-stm32f4-and-stm32f7-series-dma-controller-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4566-extending-the-dac-performance-of-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4660-migration-of-microcontroller-applications-from-stm32f42xxxf43xxx-devices-to-stm32f7-series-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4661-getting-startedwith-stm32f7-series-mcu-hardware-development-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4676-stm32f7-series-peripheral-interconnections-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4731-stm32cubemcu-package-examples-for-stm32f7-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4839-level-1-cacheon-stm32f7-series-and-stm32h7-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4850-stm32-mcus-

- spreadspectrum-clock-generation-principles-properties-andimplementation-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4936-migration-of-microcontroller-applications-from-stm32f7-series-to-stm32h743753-line-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4990-getting-started-with-sigmadelta-digital-interface-on-applicable-stm32-microcontrollers-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an5073-receiving-spdif-audio-stream-with-the-stm32f4f7h7-series-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4760-quadspiinterface-on-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an5293-migration-guide-from-stm32f7-series-to-stmh74x75x-stm32h72x73x-and-stmh7a37bx-devices-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4879-introduction-to-usb-hardware-and-pcb-guidelines-using-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

- Application Notes https://www.st.com/resource/en/application\_note/an5537-how-to-use-adcoversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcusstmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an5036-guidelines-for-thermal-management-on-stm32-applications-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an2867-guidelines-for-oscillator-design-on-stm8afals-and-stm32-mcusmpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4277-how-to-use-pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4861-introduction-to-lcdtft-display-controller-ltdc-on-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
- Application Notes https://www.st.com/resource/en/application\_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an5020-introduction-to-

digital-camera-interface-dcmi-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an4044-floating-point-for related Tools unit-demonstration-on-stm32-microcontrollers-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an4323-getting-started-

for related Tools with-stemwin-library-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an4435-guidelines-for-for related Tools obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-

& Software application-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an4657-stm32-

for related Tools inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an4667-stm32f7-series-

for related Tools system-architecture-and-performance-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an4731-stm32cube-

for related Tools mcu-package-examples-for-stm32f7-series-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an4749-managing-

for related Tools lowpower-consumption-on-stm32f7-series-microcontrollers-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an4841-digital-signal-for related Tools processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an5056-integration-

for related Tools guide-for-the-xcubesbsfu-stm32cube-expansion-package-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an5360-getting-started-

for related Tools with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an5361-getting-started-

for related Tools with-projects-based-on-dualcore-stm32h7-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an5394-getting-started-

for related Tools with-projects-based-on-the-stm32l5-series-in-stm32cubeide-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an5418-how-to-build-a-for related Tools simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an5426-migrating-for related Tools graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software 550-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an5564-getting-started-

for related Tools with-projects-based-on-dualcore-stm32wl-microcontrollers-in-

& Software stm32cubeide-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an4865-lowpower-timer-

& Software stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an5698-adapting-the-for related Tools xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-

& Software other-safety-standards-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application\_note/an5731-stm32cubemx-

for related Tools and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application note/an4502-stm32-

for related Tools smbuspmbus-expansion-package-for-stm32cube-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an5952-how-to-use-

for related Tools cmake-in-stm32cubeide-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an5054-how-to-perform-for related Tools secure-programming-using-stm32cubeprogrammer-stmicroelectronics.pdf

& Software

Application Notes https://www.st.com/resource/en/application\_note/an6179-how-to-

for related Tools integrate-the-stl-firmware-into-a-time-critical-user-application-

& Software stmicroelectronics.pdf

Design Notes & https://www.st.com/resource/en/design\_tip/dt0117-microphone-array-

Tips beamforming-in-the-pcm-and-pdm-domain-stmicroelectronics.pdf

Errata Sheets https://www.st.com/resource/en/errata\_sheet/es0334-stm32f76xxx-and-

stm32f77xxx-device-errata-stmicroelectronics.pdf

Datasheet https://www.st.com/resource/en/datasheet/dm00273119.pdf

Programming https://www.st.com/resource/en/programming\_manual/pm0253-stm32f7-

Manuals series-and-stm32h7-series-cortexm7-processor-programming-manual-

stmicroelectronics.pdf

Reference https://www.st.com/resource/en/reference\_manual/rm0410-stm32f76xxx-

Manuals and-stm32f77xxx-advanced-armbased-32bit-mcus-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical\_note/tn1163-description-of-

& Articles wlcsp-for-microcontrollers-and-recommendations-for-its-use-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical\_note/tn1204-tape-and-reel-

& Articles shipping-media-for-stm32-microcontrollers-in-bga-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical\_note/tn1205-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical note/tn1206-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical note/tn1207-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical\_note/tn1208-tape-and-reel-

& Articles shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-

packages-stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical\_note/tn1433-reference-device-

& Articles marking-schematics-for-stm32-microcontrollers-and-microprocessors-

stmicroelectronics.pdf

Technical Notes https://www.st.com/resource/en/technical\_note/tn1489-security-bulletin-

& Articles tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-

stmicroelectronics.pdf

User Manuals https://www.st.com/resource/en/user\_manual/um2318-stm32f7-series-

safety-manual-stmicroelectronics.pdf

User Manuals https://www.st.com/resource/en/user\_manual/um3251-stm32f7-series-

ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf