ACTUATORS

SERVO MOTOR

use the complementary PWM mode

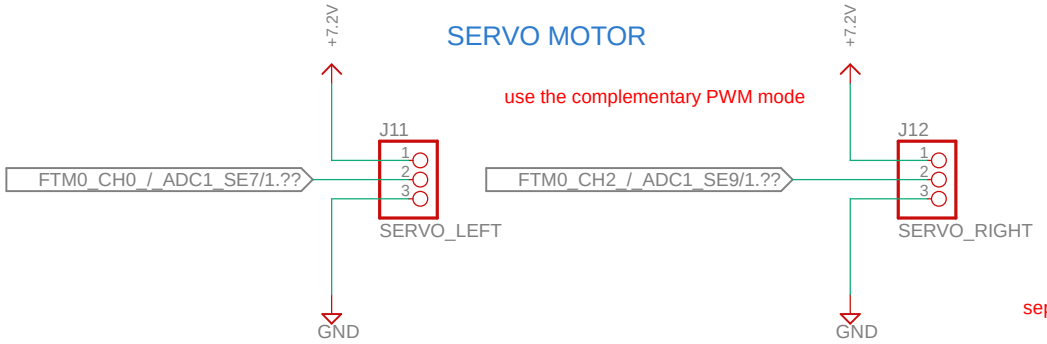

BLDC controlling ESC

separe the 7.2V GND

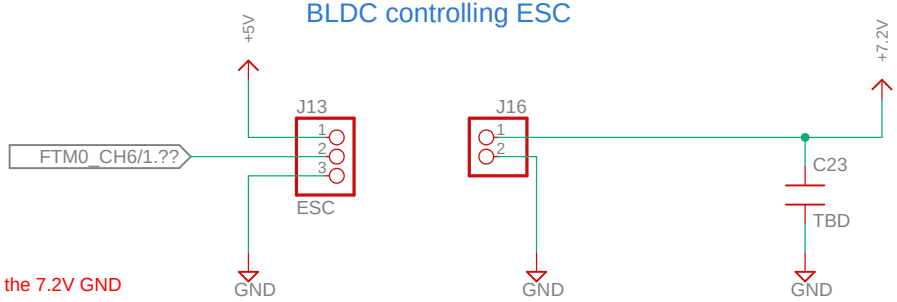

DON'T FORGET TEST POINTS

SENSORS

QUAD ENCODER

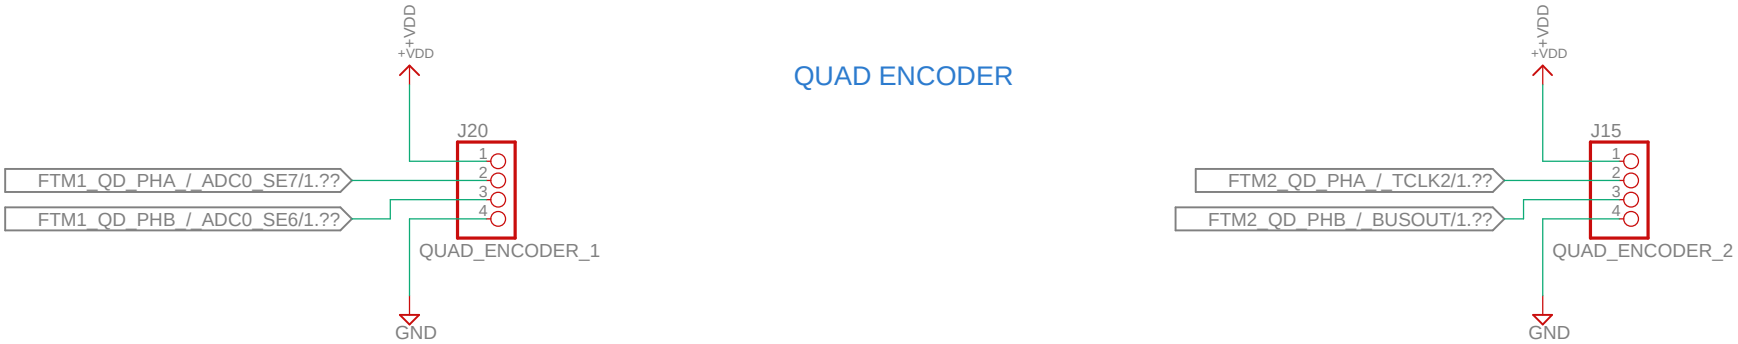

HALL EFFECT SENSOR
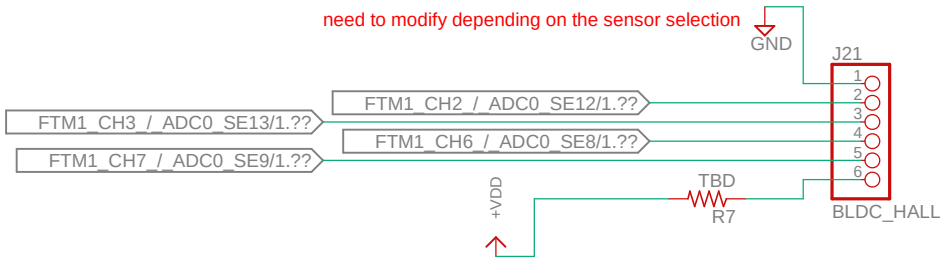
need to modify depending on the sensor selection