MegaRAC Development Kit for the AST2600 BMC

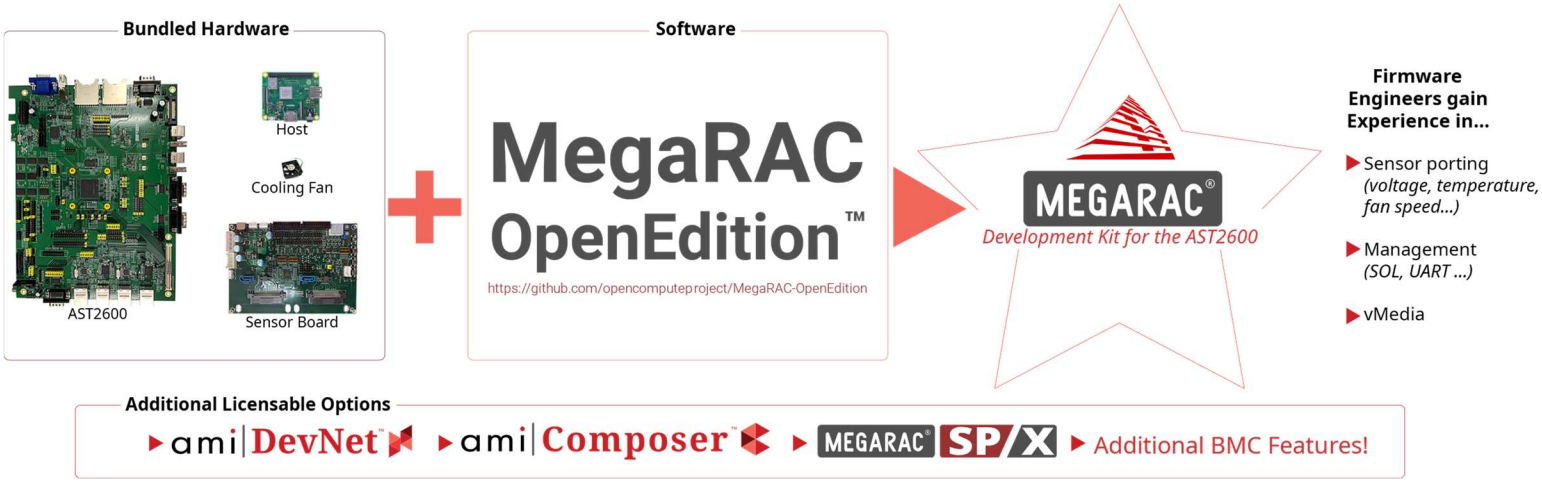

Bundled Hardware

- AST2600 EVB
- AMI Sensor Board
- Host System
- Fan

Tutorials

- Firmware & AMI DevNet™ Installation and Environment Preparation
- Projects to gain development experience

OEM/ODM Provided

- USB Driver (SD, USB flash for virtual media)
- Ethernet, Serial and/or Display Cable(s)

MegaRAC OpenEdition™开发工具包适用于 AST2600 BMC 的硬件功能，教程以及提供 MegaRAC OpenEdition OpenBMC 固件的访问权限，可帮助开发人员和工程师进行传感器移植，管理技术（如 SOL 和 UART 等管理技术）和虚拟媒体（vMedia）的体验。这个完整的套件能让 OEM 和 ODM 客户使用 MegaRAC OpenEdition BMC 固件和 ASPEED Technology 的 AST2600 BMC 来立即进行项目开发和教育训练。

MegaRAC OpenEdition™ Firmware

MegaRAC OpenEdition 是基于 OpenBMC 固件的可强化生产版本。 MegaRAC OpenEdition 可以藉由增加 OEM 和 ODM 信赖多年，成熟、安全的远程服务器管理 AMI IP 软件包进行强化。 MegaRAC OpenEdition 具有直观，可扩展的开放开发框架。

其关键“公用核心”概念可提供高度可管理的代码基础，高 ROI，以及用于广泛产品部署的完整服务处理器解决方案。 MegaRAC OpenEdition 包括值得所有 AMI 客户信任和期望的专属支持，代码更新和安全升级建议。

MegaRAC OpenEdition 包含全系列交融的固件/软件，工具和实用程序及服务：

MegaRAC 固件/软件 解决方案

- 服务器基板管理控制器 (BMC)
- 机箱 (机箱 或 机架管理)
- 必要的可授权 IP 模块以提供完整的可管理性
- 功能齐全的 AMI NevNet 开发环境，为固件强化提供了明显的优势与好处

MegaRAC 服务

- 用于产品完整开发与交付的收费服务
- 包含 BMC 功能设计与订制的项目承包和工程 NRE 服务
- 硬件平台移植服务
- 质量检验 (QA) & 安全分析服务

支援平台

- Microsoft® Project Olympus platform
- Intel® Server System ("Wolfpass") CRB
- MiTAC® Tioga Pass, WiWynn® Tioga Pass

MegaRAC OpenEdition 固件支持多种(CRB) 设计,并会定期增加新的平台支持

For more information please visit the request form at
ami.com/devkit

ami®
power • manage • secure

Bundled Hardware

MEGARAC®

AST2600 EVB

AST2600 Remote Management Server Processor

Host



Raspberry Pi™

Raspberry Pi™ is a trademark of the Raspberry Pi Foundation in the US and other countries.

Fan

Cooling Fan

AMI 感测版

S997 系列传感器板是设计来仿真数据中心服务器平台上常见的传感器。 可立即让 ODM 和 OEM 客户用于 MegaRAC BMC 固件和 AST2600 BMC 开发。固件工程师可取得传感器移植，SOL/UART 以及 vMedia 管理的实做经验。

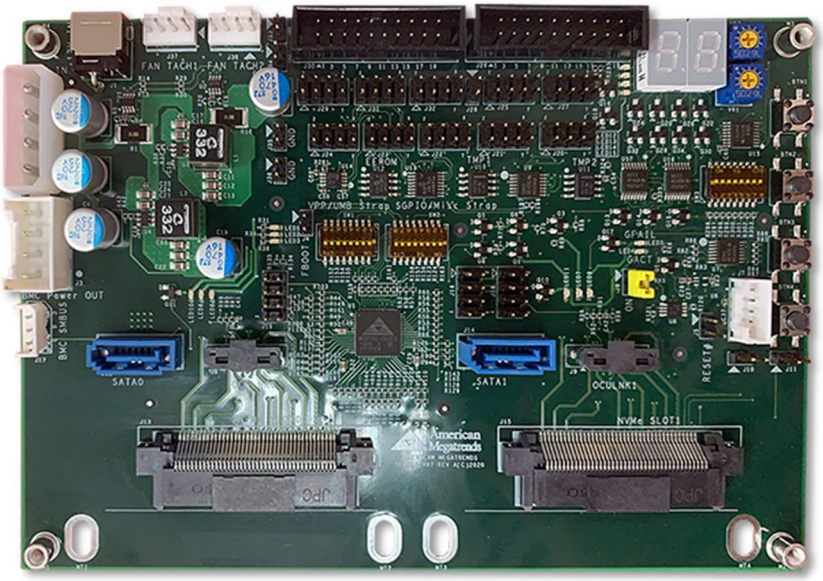

- 2x Current/voltage sensors (INA219A) for 12V and 5V DC power monitoring
- 2x drive facing connectors for NVMe/SAS/SATA (SFF-8639 U.2 Slot; U.3 compatible)
- 2x host facing connectors for U.2/U.3 NVMe (x4 OCulink)
- 2x host facing connectors for SATA/SAS (std 7-pin SATA)
- 1x Backplane Controller (AMI MG9100) UBM/VPP/SGPIO host protocol for drive, LED and BMC management
- 1x NVMe I²C management interface (accessible via pin header)
- 1x 2-channel I²C MUX with Interrupt (PCA9543A)
- 2x temperature sensors (TM75AID)
- 1x 16K bit EEPROM (24LC16B)
- 1x 2-to-1 I²C master de-multiplexer with an arbiter function (PCA9641)
- 1x I²C repeater (PCA9617)
- 1x Parallel-in/serial-out (74LV165A) with 8 position DIP switch
- 2x Serial-in/parallel-out (74LV595A) with 7 segment LED display
- 2x potentiometers for +12V, +5V voltage monitoring (to BMC ADC input)
- 1x 2-channel +12V DC FAN control (PWM)/monitoring(TACHO)
- Signals are available via pin headers for composing desired I²C topologies
- 4 GPIO controlled LEDs
- 4 digital inputs via 4 tactile switches

MG9100 can be configured via DIP Switches to serve multiple backplane applications

For more information please visit the request form at
ami.com/devkit

ami®
power • manage • secure

The Linux Foundation and OpenBMC™ are a marks of LF Projects, LLC in the US and other countries.
©2021 American Megatrends International LLC. All rights reserved. Product specifications are subject to change without notice. Products mentioned herein may be trademarks or registered trademarks of their respective companies. No warranties are made, either expressed or implied, with regard to the contents of this work, its merchantability or fitness for a particular use. This publication contains proprietary information and is protected by copyright. AMI reserves the right to update, change and/or modify this product at any time.