MegaRAC Development Kit for the AST2600 BMC

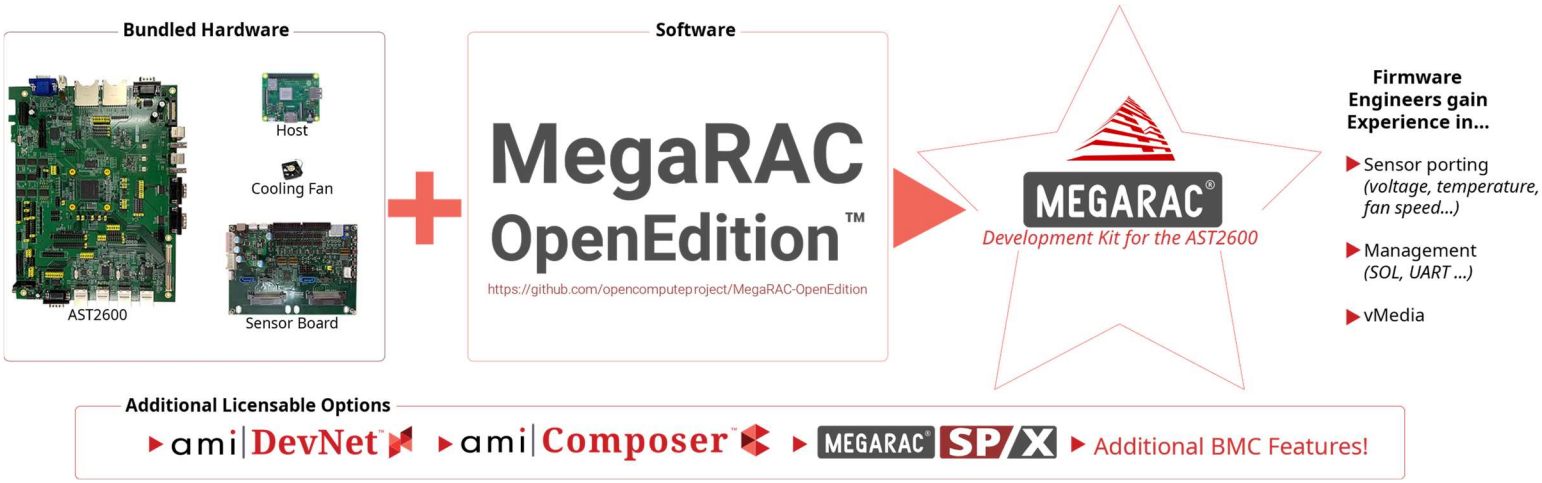

Bundled Hardware

- AST2600 EVB
- AMI Sensor Board
- Host System
- Fan

Tutorials

- Firmware & AMI DevNet™ Installation and Environment Preparation
- Projects to gain development experience

OEM/ODM Provided

- USB Driver (SD, USB flash for virtual media)
- Ethernet, Serial and/or Display Cable(s)

MegaRAC OpenEdition™開發套件適用於 AST2600 BMC 的硬體功能，教程以及提供 MegaRAC OpenEdition™ Open BMC 韌體的存取權限，可幫助開發人員和工程師進行感測器移植，管理技術（如 SOL 和 UART 等管理技術）和虛擬媒體（vMedia）的體驗。這個完整的套件能讓 OEM 和 ODM 客戶使用 MegaRAC OpenEdition™ BMC 韌體和 ASPEED Technology 的 AST2600 BMC 來立即進行專案開發和教育訓練。

MegaRAC OpenEdition™ Firmware

MegaRAC OpenEdition™是基於 OpenBMC 韌體的可強化生產版本。 MegaRAC OpenEdition™可以藉由增加 OEM 和 ODM 信賴多年，成熟、安全的遠程服務器管理 AMI IP 軟件包進行強化。 MegaRAC OpenEdition™具有直觀，可擴展的開放開發框架。

其關鍵“公用核心”概念可提供高度可管理的代碼基礎，高 ROI，以及用於廣泛產品部署的完整服務處理器解決方案。 MegaRAC OpenEdition™包括值得所有 AMI 客戶信任和期望的專屬支持，代碼更新和安全升級建議。

MegaRAC OpenEdition™包含全系列交融的韌體/軟體，工具和實用程序及服務：

MegaRAC 韌體/軟體 解決方案

- 伺服器基板管理控制器 (BMC)
- 機箱 (機箱 或 機架管理)
- 必要的可授權 IP 模組以提供完整的可管理性
- 功能齊全的 AMI NevNet 開發環境，為韌體強化提供了明顯的優勢與好處

MegaRAC 服務

- 用於產品完整開發與交付的收費服務
- 包含 BMC 功能設計與訂製的專案承包和工程 NRE 服務
- 硬體平台移植服務
- 品質檢驗 (QA) & 安全分析服務

支援平台

- Microsoft® Project Olympus platform
- Intel® Server System ("Wolfpass") CRB
- MiTAC® Tioga Pass, WiWynn® Tioga Pass

MegaRAC OpenEdition 韌體支援多種(CRB) 設計,並會定期增加新的平台支援

For more information please visit the request form at
ami.com/devkit

ami®
power • manage • secure

Bundled Hardware

MEGARAC®

AST2600 EVB

AST2600 Remote Management Server Processor

Host



Raspberry Pi™

Raspberry Pi™ is a trademark of the Raspberry Pi Foundation in the US and other countries.

Fan

Cooling Fan

AMI 感測版

S997 系列傳感器板是設計來模擬數據中心服務器平台上常見的傳感器。 可立即讓 ODM 和 OEM 客戶用於 MegaRAC BMC 韌體和 AST2600 BMC 開發。 韌體工程師可取得傳感器移植，SOL/UART 以及 vMedia 管理的實做經驗。

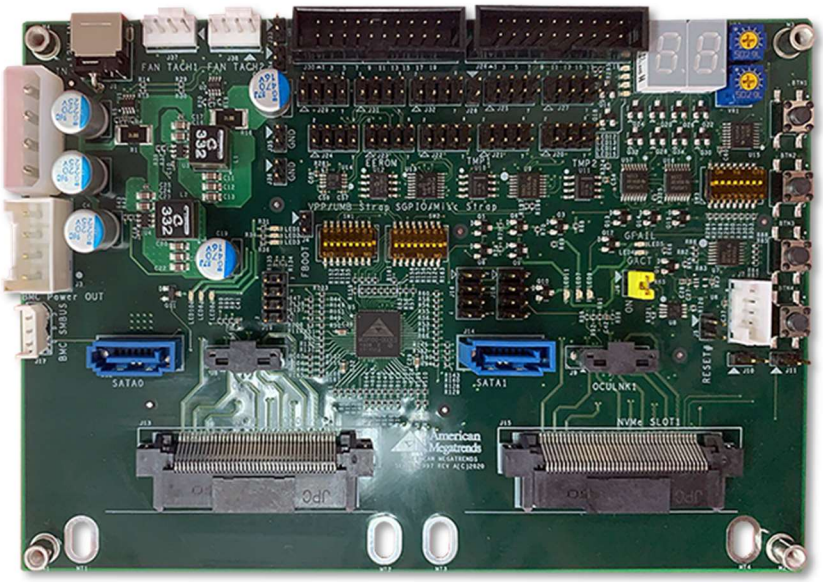

- 2x Current/voltage sensors (INA219A) for 12V and 5V DC power monitoring
- 2x drive facing connectors for NVMe/SAS/SATA (SFF-8639 U.2 Slot; U.3 compatible)
- 2x host facing connectors for U.2/U.3 NVMe (x4 OCulink)
- 2x host facing connectors for SATA/SAS (std 7-pin SATA)
- 1x Backplane Controller (AMI MG9100) UBM/VPP/SGPIO host protocol for drive, LED and BMC management
- 1x NVMe I²C management interface (accessible via pin header)
- 1x 2-channel I²C MUX with Interrupt (PCA9543A)
- 2x temperature sensors (TM75AID)
- 1x 16K bit EEPROM (24LC16B)
- 1x 2-to-1 I²C master de-multiplexer with an arbiter function (PCA9641)
- 1x I²C repeater (PCA9617)
- 1x Parallel-in/serial-out (74LV165A) with 8 position DIP switch
- 2x Serial-in/parallel-out (74LV595A) with 7 segment LED display
- 2x potentiometers for +12V, +5V voltage monitoring (to BMC ADC input)
- 1x 2-channel +12V DC FAN control (PWM)/monitoring(TACHO)
- Signals are available via pin headers for composing desired I²C topologies
- 4 GPIO controlled LEDs
- 4 digital inputs via 4 tactile switches

MG9100 can be configured via DIP Switches to serve multiple backplane applications

For more information please visit the request form at
ami.com/devkit

ami®
power • manage • secure

The Linux Foundation and OpenBMC™ are a marks of LF Projects, LLC in the US and other countries.
©2021 American Megatrends International LLC. All rights reserved. Product specifications are subject to change without notice. Products mentioned herein may be trademarks or registered trademarks of their respective companies. No warranties are made, either expressed or implied, with regard to the contents of this work, its merchantability or fitness for a particular use. This publication contains proprietary information and is protected by copyright. AMI reserves the right to update, change and/or modify this product at any time.