ami DCM
Data Center Manager

Scalable Data Center and AI Infrastructure Management

AMD AMPERE arm intel NVIDIA

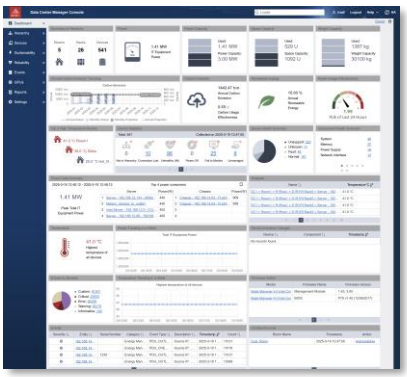

What is AMI® DCM?

AMI® DCM is an advanced on-premise software solution for heterogeneous and high-density data center and AI infrastructure management. It manages servers based on different architectures and from different vendors, as well as networking, power, storage, and cooling devices.

By collecting granular data on health, power, thermal performance, utilization, carbon emissions, and firmware, AMI® DCM delivers actionable insights starting at the device and component levels and extending all the way to the data center.

This allows operators to address the most common challenges of data center and AI infrastructure management – including multi-vendor visibility, GPU and accelerator utilization, power and cooling optimization, firmware lifecycle management, and sustainability tracking – enabling greater efficiency, reliability, and scalability across traditional and AI-driven environments.

Advanced GPU Management

AMI® DCM includes advanced GPU management capabilities that deliver deeper visibility into GPU utilization, health, and power metrics. Administrators can identify underutilized GPUs, detect hardware anomalies, visualize GPU topology, and manage firmware versions. This improves GPU reliability, uptime, and efficiency for AI and HPC clusters while simplifying diagnostics and proactive maintenance.

Low Utilization GPUs

Product Name	Serial Number	Server	GPU Util.
NVIDIA GH200 96GB HBM3	1640124000298	Compute Tray 10	75.00%
NVIDIA GH200 96GB HBM3	1640124000243	Compute Tray 10	73.00%

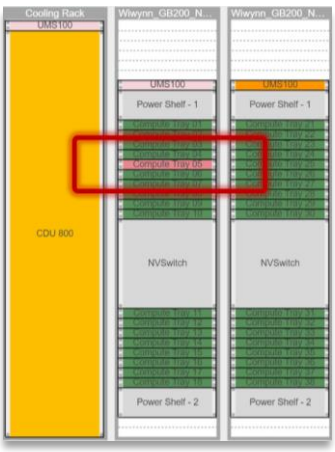

AI Infrastructure Management

AMI® DCM delivers end-to-end AI infrastructure management across heterogeneous AI racks, including power and PDU monitoring, liquid-cooling CDU support, and GPU and accelerator telemetry such as power draw, utilization, thermal behavior, health, and failure indicators. It also provides firmware management for servers, GPUs, and rack-level devices across architectures and vendors.

These capabilities support AI platforms such as NVIDIA® GB200/GB300 NVL72, where DCM enhances visibility and control, helping administrators improve reliability and providing the telemetry needed for energy-aware workload placement.

Latest Features

- ✓ Advanced NVIDIA GPU Management
- ✓ Enhanced Power and PDU Monitoring
- ✓ Expanded Health and Usability Enhancements
- ✓ Backup and Restore for Hierarchy and Data
- ✓ Support for AMI® MegaRAC® OneTree™
- ✓ Support for 30+ new servers and IT devices
- ✓ AI-Powered Chatbot with AMI® AMILiA

Key Benefits

- ✓ Enables granular and holistic data-center and AI infrastructure management
- ✓ Delivers a single-pane-of-glass web console for centralized visibility and control
- ✓ Provides silicon-, architecture-, and vendor-agnostic server and device support
- ✓ Operates without agents, ensuring zero impact on performance or security
- ✓ Collects real-time power, thermal, and GPU telemetry without extra hardware
- ✓ Monitors component health proactively to reduce downtime and improve reliability
- ✓ Optimizes rack density and power usage for AI and traditional workloads
- ✓ Produces granular thermal insights to identify hotspots and cooling inefficiencies
- ✓ Streamlines firmware management across servers, GPUs, and rack-level devices
- ✓ Reduces CapEx and OpEx through smarter infrastructure management

Component-Level to Data-Center-Wide Visibility

AI Compute Visibility and Cluster Reliability: AMI® DCM provides deep visibility into GPU and accelerator behavior, correlating component-level metrics—such as power draw, utilization, thermal behavior, and health indicators—across servers and racks. This helps operators detect emerging issues sooner, maintain cluster reliability, and understand how GPU-level events impact overall AI workload stability.

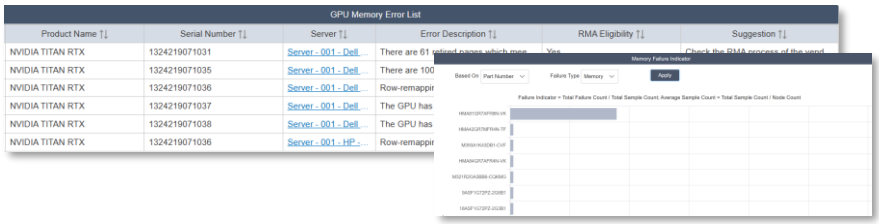

Power, Utilization, and Cooling Insights Across Racks: AMI® DCM extends this visibility to cooling and environmental conditions by combining device-level thermal readings with rack-wide patterns. Hotspots, cooling imbalances, and liquid-cooling CDU issues (such as flow, pressure, or leak abnormalities) are surfaced in context, enabling more accurate density planning and more efficient cooling for high-power AI racks.

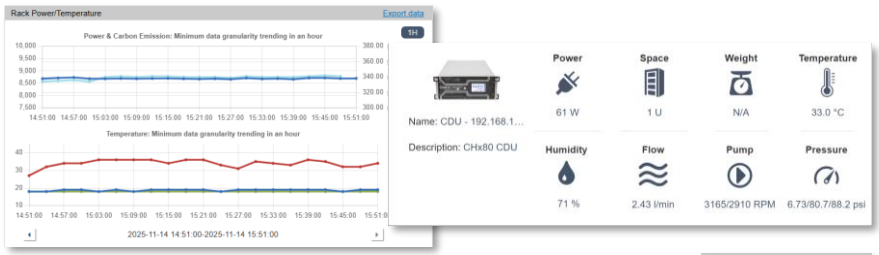

Firmware Visibility: Firmware variability can impact security, performance and reliability. Server, GPUs, and rack-level device versions are continuously monitored, allowing teams to maintain consistency. DCM highlights outdated or inconsistent firmware and supports bulk, Redfish-based updates to ensure that device-level changes scale cleanly across the data center.

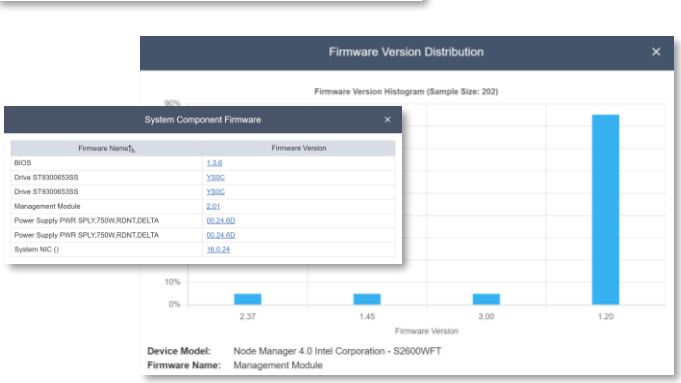

AI-Assisted Operational Awareness: AMI® DCM now includes an experimental AI-powered chatbot that is powered by AMI® AMILIA that makes this multi-level visibility more accessible. By using a secure, local LLM, operators can retrieve component, rack, and data-center insights through natural language, accelerating diagnostics and improving operational awareness.

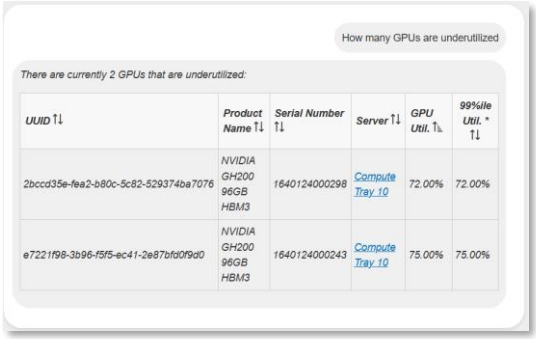

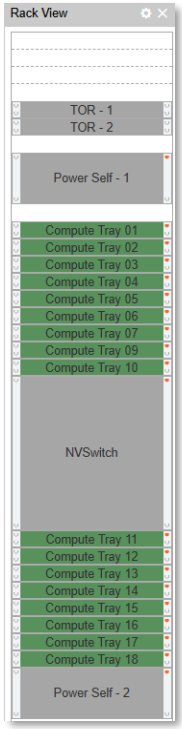

Broad Protocol Support: AMI® DCM communicates with different servers and devices using industry-standard protocols, including Redfish for modern servers and AI servers, SNMP for power and networking devices, IPMI for legacy servers, and SSH for in-band access. This broad coverage ensures DCM can manage mixed environments, regardless of their architecture, vendor or generation.

Interfaces and Integration Points

- Web Console
- i-Frame Integration
- RESTful APIs
- Notifications
- Apache Kafka Streaming
- AI-Powered Chatbot

Requirements	Details
Supported Operating Systems	• Microsoft Windows Server 2016, 2019, 2022, 2025 • Red Hat Enterprise Linux 8.10, 9.6,10.0 Server x86_64 • SUSE Linux Enterprise Server 12 SP5 and 15 SP6 x86_64 • Ubuntu Server 18.04.6, 20.04.6, 22.04.5, 24.04.2 x86_64 • Debian 11.11, 12.11 x86_64
Hardware Requirements	Recommended configuration for a scaled environment (managing up to 60,000 nodes) • 2 x 16 Core x86 Processor @ 2.60 GHz or higher • 256 GB RAM • 2 TB SSD • 10 Gigabit Network

For More Information

✓ Visit: www.ami.com/ami-dcm

✓ Contact: dcm_sales@ami.com

©2026 AMI All rights reserved. Product specifications are subject to change without notice. Products mentioned herein may be trademarks or registered trademarks of their respective companies. No warranties are made, either expressed or implied, with regard to the contents of this work, its merchantability or fitness for a particular use. This publication contains proprietary information and is protected by copyright. AMI reserves the right to update, change and/or modify this product at any time.