

CE TEST REPORT

for

Lithium-ion battery

Model: XINJ 606090

(Other models please see the page 3)

Prepared for: Shenzhen Xinjiang electronic Commerce Co., LTD
803 Dongpo Xuan, Building 6, Shuxiang Door, Mintai Community,
Minzhi Street, Longhua District, Shenzhen

Prepared by: Shenzhen NCT Testing Technology Co., Ltd
B2A101, B2A201, B2A202, Fuqiao 6th Area, Xintian Community, Fuhai
Street, Bao'an District, Shenzhen, Guangdong, China.


TEL: +86-400-8868-419

Report Number: NCT24028509XE1-1

Date of Test: Jul. 10, 2024 ~ Jul. 12, 2024

Date of Issue: Jul. 12, 2024

Tested By:



Shine Wu

Reported By:



Keven Wu

Reviewed By:



Henry Wang

The results detailed in this test report relate only to the specific sample(s) tested. It is the Application's responsibility to ensure that all production units are manufactured with equivalent EMC characteristics. This report is not to be reproduced except in full, without written approval from NCT Testing Technology.

Table of contents

1.0 General Information	3
1.1 Client Information	3
1.2 General Description of E.U.T.	3
1.3 Test Facility:	4
1.4 Version:	4
2.0 List of Measurement Equipment	5
3.0 Technical Details	7
3.1 Investigations Requested	7
3.2 Test Standards	7
3.3 Performance Criteria	7
3.4 Description Of Support Units	8
3.5 Test mode:	8
3.6 Test standards and Results Summary Tables	9
3.7 Measurement Uncertainty (95% confidence levels, k=2)	9
4.0 Electromagnetic Interference Test results	10
4.1 Power Line Conducted Emission Test	10
4.2 Telecommunication ports Conducted Emission Test	14
4.3 Radiated Emission Test	16
4.4 Harmonic Current Emissions	20
4.5 Flicker and Voltage Fluctuation	21
5.0 Immunity Test	22
5.1 Electrostatic Discharge	22
5.2 RF field strength susceptibility (80MHz----- 1000MHz)	23
5.3 Electrical Fast Transient/Burst (EFT/B) immunity test	24
5.4 Surge test	25
5.5 Conducted Immunity test	26
5.6 Power-Frequency magnetic field test	27
5.7 Voltage Dips/Interruptions immunity test	28
6.0 CE Label	29
7.0 Photos of testing	30
8.0 Photos of the EUT	31

1.0 General Information

1.1 Client Information

Application:	Shenzhen Xinjiang electronic Commerce Co., LTD
Address of Application:	803 Dongpo Xuan, Building 6, Shuxiang Door, Mintai Community, Minzhi Street, Longhua District, Shenzhen
Manufacturer:	Shenzhen Xinjiang electronic Commerce Co., LTD
Address of Manufacturer:	803 Dongpo Xuan, Building 6, Shuxiang Door, Mintai Community, Minzhi Street, Longhua District, Shenzhen

1.2 General Description of E.U.T.

Product Name:	Lithium-ion battery
Model:	XINJ 606090
Additional Model:	286988, 305070, 306080, 3070100, 3090120, 3490120, 35100100, 3553125, 356090, 357090, 3570100, 3766125, 3768112, 3490105, 403759, 405070, 406080, 406090, 4070100, 407288, 422770, 454261, 505060, 505068, 505573, 507070, 5070100, 5541100, 5565113, 603048, 6030100, 603569, 603450, 604050, 604060, 6040100, 605060, 605068, 605085, 6050105, 605293, 6060100, 6560110, 702050, 702080, 703450, 704060, 704070, 7050100, 706090, 705690, 706062, 721855, 752555, 7565121, 802042, 803035, 803040, 803450, 803480, 804040, 804050, 804068, 804080, 805058, 805080, 814864, 853460, 853465, 853865, 854165, 855085, 901860, 902360, 903048, 903465, 906090, 923048, 965068, 102040, 102535, 102540, 102550, 103035, 103040, 103050, 103443, 103450, 103665, 104040, 104050, 105080, 1070105, 105575, 112560, 123040, 124050, 126090, 135178, 156870
Trade Mark:	N/A
Power Supply:	DC 3.7V 4000mAh
Memo:	According client required.
Model Difference:	All models are the same except for model name.
Remark:	This test report is only for the test of the main model of the prototype

1.3 Test Facility:

Site Description:	
EMC Lab.:	Accredited by CNAS, 2022-09-27 The certificate is valid until 2028.01.07 The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017) The Certificate Registration Number is L8251
	Designation Number: CN1347 Test Firm Registration Number: 894804 Accredited by A2LA, June 14, 2023 The Certificate Registration Number is 6837.01
	Accredited by Industry Canada, November 09, 2018 The Conformity Assessment Body Identifier is CN0150 Company Number: 30806
Name of Test Lab:	Shenzhen NCT Testing Technology Co., Ltd
Address of Test Lab:	B 2A101, B2A201, B2A202, Fuqiao 6th Area, Xintian Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.
Telephone:	+86-400-8868-419

1.4 Version:

Report No.	Version	Description	Approved
NCT24028509XE1-1	Rev.01	Initial issue of report	Jul. 12, 2024

2.0 List of Measurement Equipment					
Conducted emission					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESPI	101604	RS	2024/6/17	2025/6/16
LISN	ENV 216	102796	RS	2024/6/17	2025/6/16
LISN	VN1-13S	004023	CRANAGE	2024/6/17	2025/6/16
Radiated emission					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
EMI Test Receiver	ESCI	101178	RS	2024/6/17	2025/6/16
Spectrum Analyzer	N9020A	MY50510202	Agilent	2024/6/17	2025/6/16
Amplifier	BBV 9743 B	00374	SCHWARZBECK	2024/6/17	2025/6/16
Bilog Antenna	VULB9162	00473	SCHNARZBECK	2023/3/19	2025/3/18
Horn antenna	BBHA 9120 D	02622	SCHNARZBECK	2023/3/19	2025/3/18
Preamplifier	BBV 9718D	00042	SCHNARZBECK	2024/6/17	2025/6/16
Harmonic & Flicker					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Harmonics Flicker Test System	AC200A	512369	LAPLACE	2024/6/17	2025/6/16
Electrostatic Discharge					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Electostatic Discharge Generator	HESD 16	006315	HTEC	2024/6/17	2025/6/16
Continuous radiated disturbances(TCT)					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Bilog Antenna	3142D	00135452	ETS	2024/04/12	2025/04/11
Amplifier (80-1000MHz)	AP801000_250	MPA1708341	SKET	2024/04/12	2025/04/11
Amplifier (1-3GHz)	AP0103_75	MPA1708342	SKET	2024/04/12	2025/04/11
Amplifier (3-6GHz)	AP0206_50	MPA1708343	SKET	2024/04/12	2025/04/11
RF Switch	/	/	EMC TOYO	2024/04/12	2025/04/11
Power Sensor	/	MY41496069	Agilent	2024/04/12	2025/04/11
Signal Generator	N5181B	MY53050432	Agilent	2024/04/12	2025/04/11
Remark: Test in TCT(Shenzhen TCT Technology Co., Ltd)					

EFT/Dip					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Fast Transient Burst Simulator	HCOM PACT52	221003	HTEC	2024/6/17	2025/6/16
CYCLE SAG SIMULATOR	HV1P16T	221302	HTEC	2024/6/17	2025/6/16

Continuous conducted disturbances					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Signal Generator	CDG-7000-25	10904-1	SCHLODER	2024/6/17	2025/6/16
Power Amplifier	CDG 6050-100	191103	SCHLODER	2024/6/17	2025/6/16
CDN	M2+3	210319	SCHLODER	2024/6/17	2025/6/16

Power-frequency Magnetic field					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Continuous Wave Simulator	HMFG100	212305	HTEC	2024/6/17	2025/6/16

Surge					
Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
Lightning Surge Generator	HOV 7000	222202	HTEC	2024/6/17	2025/6/16
Lightning Surge Generator	HIM 450	222201	HTEC	2024/6/17	2025/6/16
Lightning Surge Generator	SCDN161	222203	HTEC	2024/6/17	2025/6/16

3.0 Technical Details

3.1 Investigations Requested

Perform Electromagnetic Interference [EMI] & Electromagnetic Susceptibility [EMS] tests for CE Marking

3.2 Test Standards

EN IEC 61000-6-3:2021	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments
EN IEC 61000-6-1:2019	Electromagnetic compatibility (EMC) - Part 6-1: Generic standards - Immunity standard for residential, commercial and light-industrial environments
EN IEC 61000-3-2:2019/A1:2021	Electromagnetic compatibility(EMC)- Part 3-2:Limits-Limits for harmonic current emissions(equipment input current $\leq 16A$ per phase)
EN 61000-3-3:2013/A2:2021	Electromagnetic compatibility (EMC)- Part 3-3:Limits-Limitation of voltage changes, Voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current $\leq 16A$ per phase and not subject to conditional connection

3.3 Performance Criteria

- Criterion A During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed.
- Criterion B During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
- Criterion C During and after testing, temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer' instructions.
Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

3.4 Description Of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E1	DC Power	ZEFENGSH ENG	DP03005	0804225	AE

3.5 Test mode:

Test Modes:	Modes Description	Record
Mode 1	Discharging	Full load
Mode 2	Charging	/
Note: All test modes were pre-tested, but we only recorded the worst case in this report.		

3.6 Test standards and Results Summary Tables

Test Condition	Test Requirement	Test Result
EMISSION Results Summary		
Conducted Emission on AC Mains, 150KHz to 30MHz	EN IEC 61000-6-3	N/A
Conducted Emission on at telecommunication ports, 150KHz to 30MHz	EN IEC 61000-6-3	N/A
Radiated Emissions, 30MHz to 1GHz	EN IEC 61000-6-3	Pass
Harmonic Emissions on AC supply	EN IEC 61000-3-2	N/A
Voltage fluctuations on AC supply	EN 61000-3-3	N/A
IMMUNITY Results Summary		
Electrostatic Discharge	EN IEC 61000-6-1	Pass
RF field strength susceptibility	EN IEC 61000-6-1	Pass
Electrical Fast transients /Burst Immunity	EN IEC 61000-6-1	N/A
Surge	EN IEC 61000-6-1	N/A
Conducted susceptibility	EN IEC 61000-6-1	N/A
Power-frequency Magnetic Field	EN IEC 61000-6-1	N/A
Dips/Voltage Interruption Variation	EN IEC 61000-6-1	N/A

Note: N/A=Not applicable


3.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	MU
1.	Temperature	$\pm 0.1^{\circ}\text{C}$
2.	Humidity	$\pm 1.0\%$
3.	Spurious emissions, conducted	$\pm 3.24\text{dB}$
4.	All emissions, radiated	$\pm 5.03\text{dB}$

4.0 Electromagnetic Interference Test results

4.1 Power Line Conducted Emission Test

4.1.1 Schematics of the test

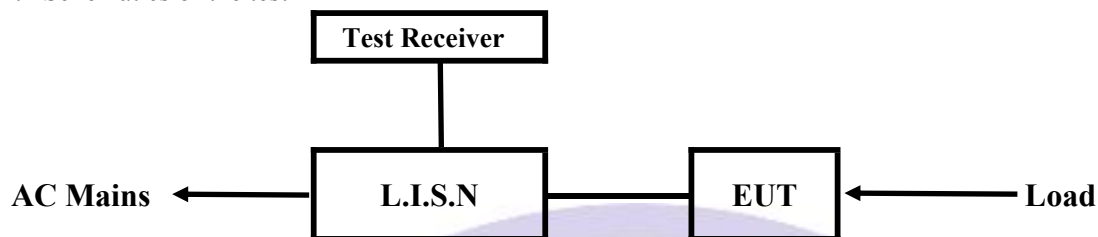


EUT: Equipment Under Test

4.1.2 Test Method and test Procedure

The test was performed in accordance with EN IEC 61000-6-3

Test Voltage: 230V~, 50Hz

Block diagram of Test setup

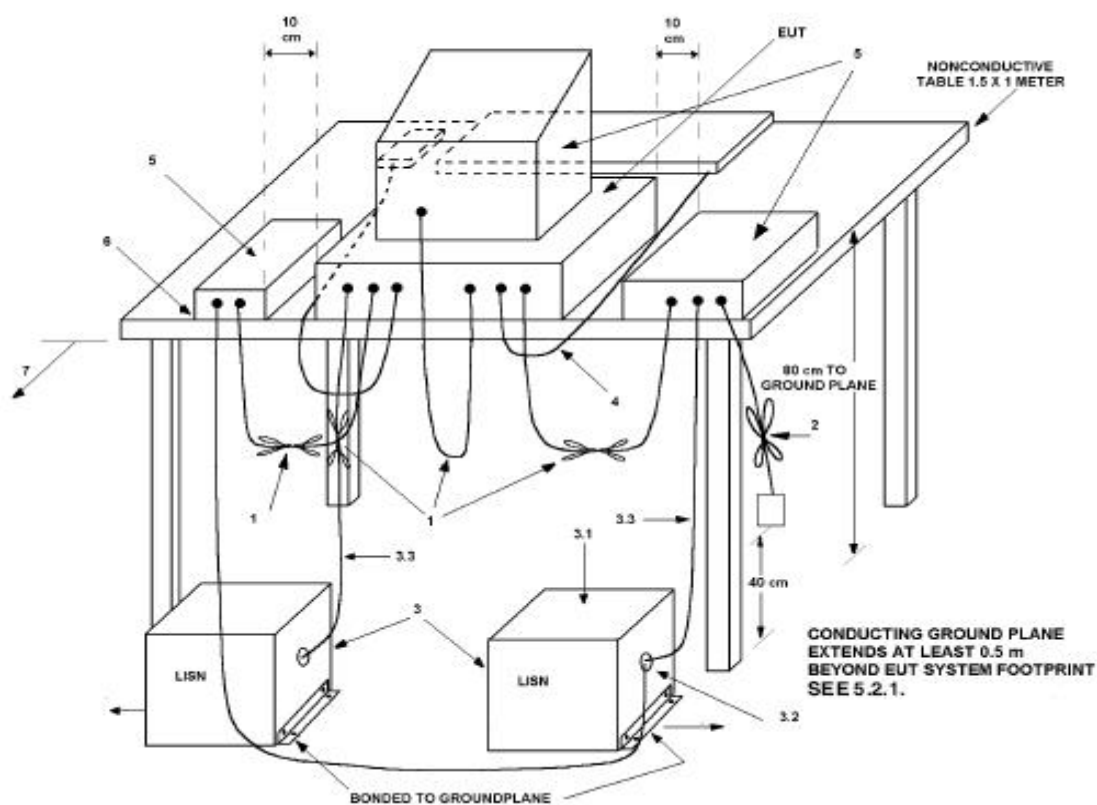

4.1.3 EUT Operating Condition

Operating condition is according to EN IEC 61000-6-3
Setup the EUT and simulators as shown on the following

4.1.4 Test Equipment

Please refer to the Section 2

4.1.5 Power line conducted Emission Limit

Frequency(MHz)	Class A Limits (dBμV)		Class B Limits (dBμV)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*
0.50 ~ 5.00	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The tighter limit shall apply at the transition frequencies

4.1.6 Photo documentation of the test set-up

Please refer to the Section 7

4.1.7 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

4.1.8 Test result

N/A

Remarks:

According to the EN IEC 61000-6-3

A Conducted Emission on Live Terminal of the power line (150kHz to 30MHz)

EUT Description: --
 Operation Mode: --
 Tested By: --
 Test date: --
 Test Result: --

Start Frequency Stop Frequency Step IF BW Detector Final M-Time
 0.15MHz 30MHz 4.5KHz 10KHz QP+AV 1s

Frequency (MHz)	Reading(dBμV)				Limit (dBμV)	
	Live		Neutral			
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
			--	--		
			--	--		

Remark: The test item is not applicable.

B Conducted Emission on Neutral Terminal of the power line (150kHz to 30MHz)

EUT Description: --
 Operation Mode: --
 Tested By: --
 Test date: --
 Test Result: --


Start Frequency Stop Frequency Step IF BW Detector Final M-Time
 0.15MHz 30MHz 4.5KHz 10KHz QP+AV 1s

Frequency (MHz)	Reading(dBμV)				Limit (dBμV)	
	Live		Neutral			
	Quasi-peak	Average	Quasi-peak	Average	Quasi-peak	Average
	--	--				
	--	--				

Remark: The test item is not applicable.

4.2 Telecommunication ports Conducted Emission Test

4.2.1 Test Method: The test was performed in accordance with EN IEC 61000-6-3

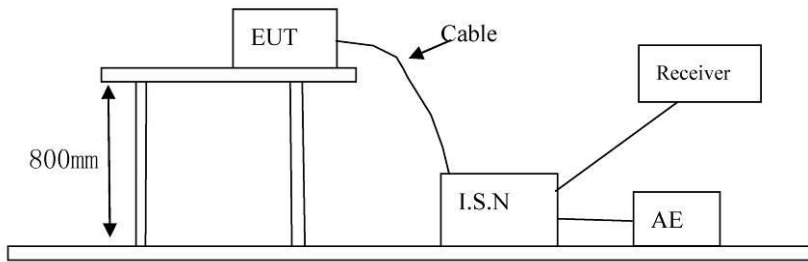

4.2.2 EUT Operating Condition

Operating condition is according to EN IEC 61000-6-3

4.2.3 Test Equipment

Please refer to the Section 2

4.2.4 Power line conducted Emission Limit

Frequency(MHz)	Class A Limits (dBμV)		Class B Limits (dBμV)	
	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
0.15 ~ 0.50	97 to 87	84 to 74	84 to 74	74 to 64
0.50 ~ 30.00	87	74	74	64

- Notes:
- *Decreasing linearly with logarithm of frequency.
 - The tighter limit shall apply at the transition frequencies

4.2.5 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

4.2.6 Test result

N/A

Remarks: According to the EN IEC 61000-6-3

A Conducted Emission on Telecommunication port (150kHz to 30MHz)

EUT Description: --
 Operation Mode: --
 Tested By: --
 Test date: --
 Test Result: --


Start Frequency Stop Frequency Step IF BW Detector Final M-Time
 0.15MHz 30MHz 4.5KHz 10KHz QP+AV 1s

Frequency (MHz)	Port	Reading(dBμA)		Limit(dBμA)	
		Quasi-peak	Average	Quasi-peak	Average

Remark: The test item is not applicable.

4.3 Radiated Emission Test



4.3.1 Schematics of the test



4.3.2 Test Method: The test was performed in accordance with EN IEC 61000-6-3

Block diagram of Test setup

Distance = 3m

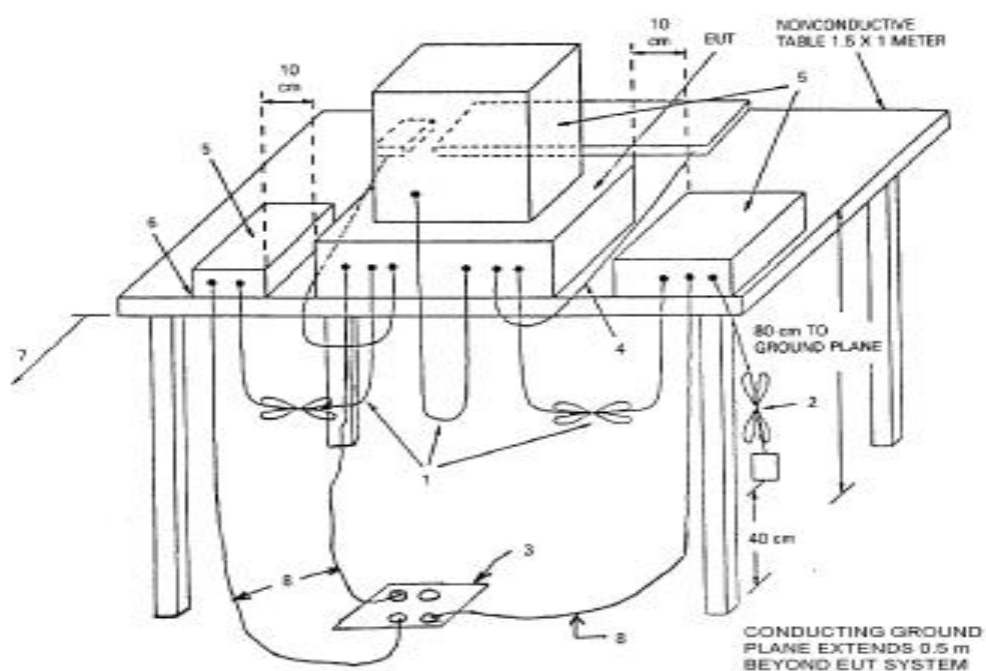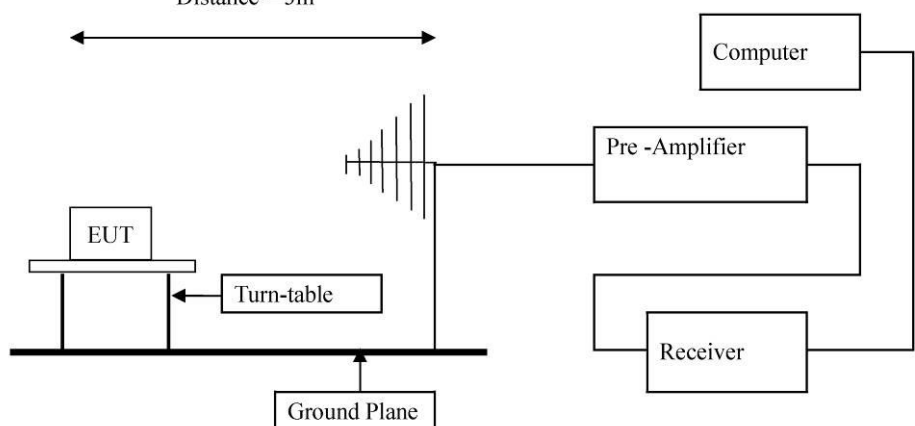

4.3.3 EUT Operating Condition

Operating condition is according to EN IEC 61000-6-3

4.3.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequency Range (MHz)	Distance (m)	Quasi-Peak limits (dB μ V/m)	
		Class A Limits	Class B Limits
30-230	3	50.00	40.00
230-1000	3	57.00	47.00

Note: 1) The lower limit shall apply at the transition frequencies
2) If measurement is not made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula $Ld1 = Ld2 * (d2/d1)$

4.3.5 Photo documentation of the test set-up

Please refer to the Section 7

4.3.6 Test Equipment:

Please refer to the Section 2

4.3.7 Test specification:


Environmental conditions: Temperature 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

4.3.8 Test result

Pass

Remarks: According to the EN IEC 61000-6-3


A. Radiated Emission In Horizontal (30MHz----1000MHz)

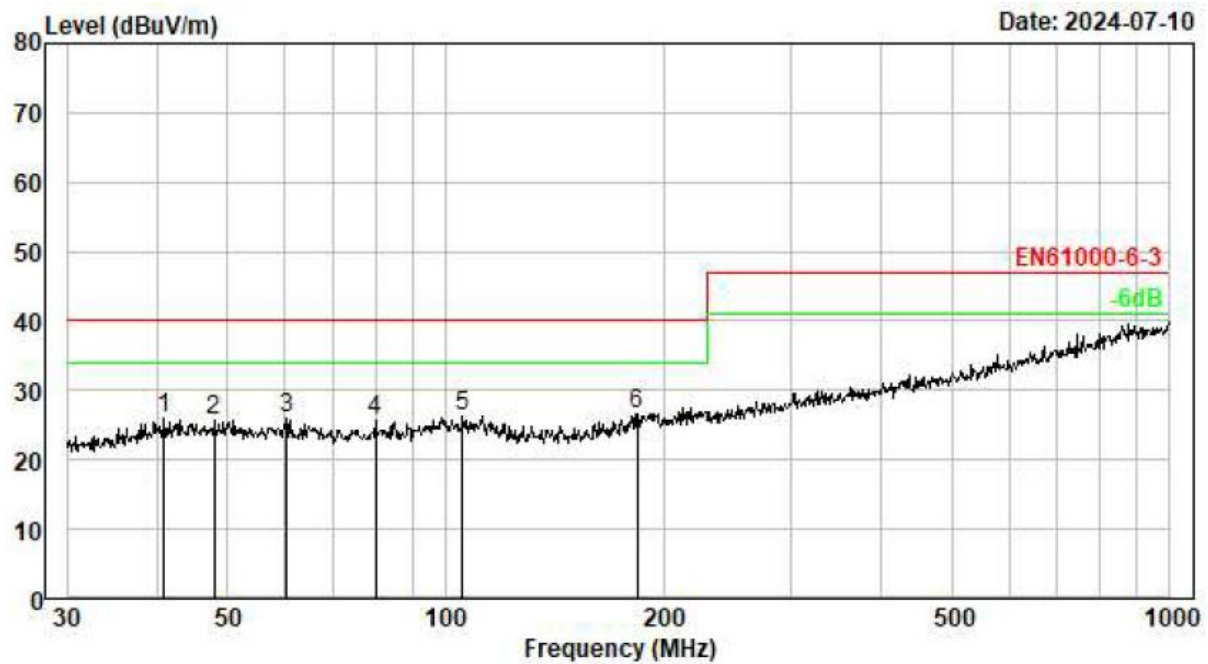

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Preamp Gain dB	Receiver Reading dBμV	Emission Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
1	40.845	0.36	12.52	0.00	13.13	26.01	40.00	-13.99	QP
2	47.826	0.41	12.66	0.00	12.74	25.81	40.00	-14.19	QP
3	60.280	0.50	11.63	0.00	13.89	26.02	40.00	-13.98	QP
4	80.081	0.61	9.70	0.00	15.42	25.73	40.00	-14.27	QP
5	105.642	0.72	11.16	0.00	14.46	26.34	40.00	-13.66	QP
6	183.844	1.02	10.31	0.00	15.36	26.69	40.00	-13.31	QP

Remark: --

B. Radiated Emission In Vertical (30MHz----1000MHz)

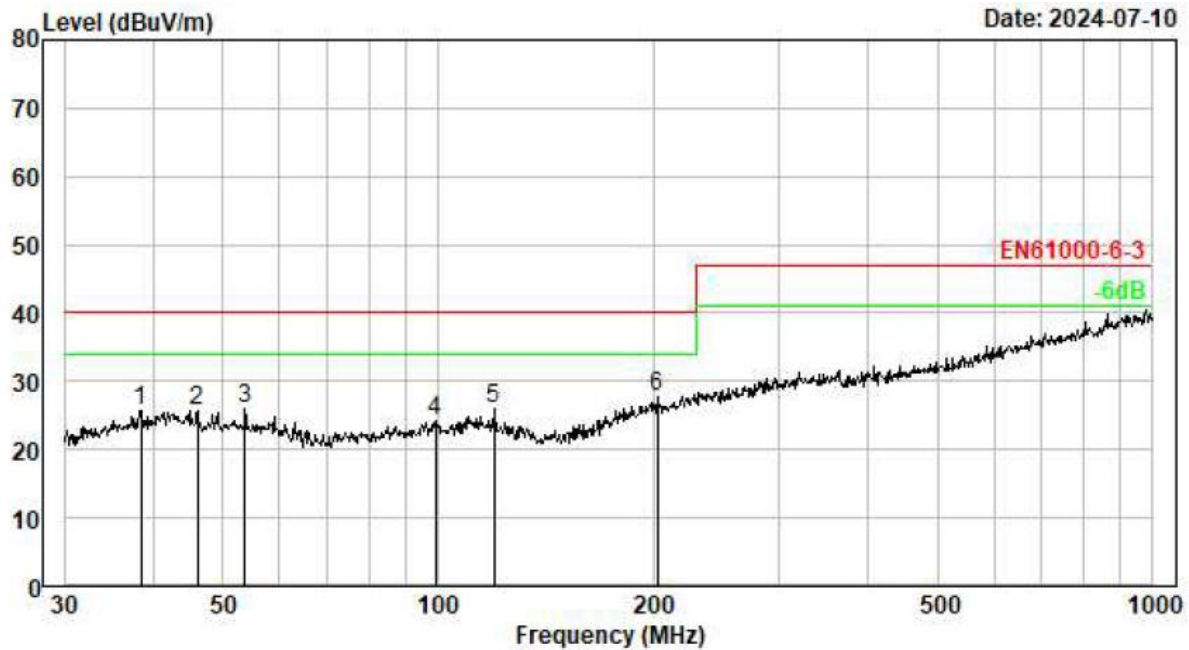

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Preamp Gain dB	Receiver Reading dBμV	Emission Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
1	38.346	0.33	12.07	0.00	13.36	25.76	40.00	-14.24	QP
2	46.016	0.40	12.63	0.00	12.64	25.67	40.00	-14.33	QP
3	53.693	0.46	12.31	0.00	13.11	25.88	40.00	-14.12	QP
4	99.180	0.69	11.01	0.00	12.44	24.14	40.00	-15.86	QP
5	119.856	0.79	10.31	0.00	14.92	26.02	40.00	-13.98	QP
6	202.810	1.07	11.50	0.00	15.05	27.62	40.00	-12.38	QP


Remark: --

4.4 Harmonic Current Emissions

4.4.1 EUT Operating Mode

N/A

4.4.2 Block Diagram of Test Setup.

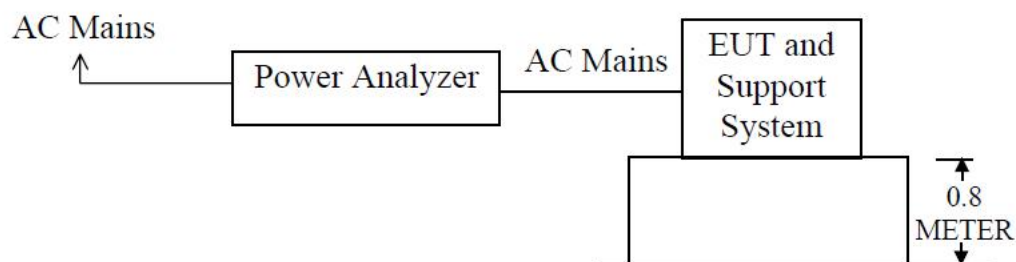

This test was performed as per EMC Basic Standard EN IEC 61000-3-2 Class A

4.4.3 Test Equipment

Please refer to Section 2 this report.

4.4.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

4.4.5 Results

Port	EUT Operating mode	Result (Passed / Failed)
AC Input	N/A	N/A


Remark: The test item is not applicable.

4.5 Flicker and Voltage Fluctuation

4.5.1 EUT Operating Mode

N/A

4.5.2 Block Diagram of Test Setup.

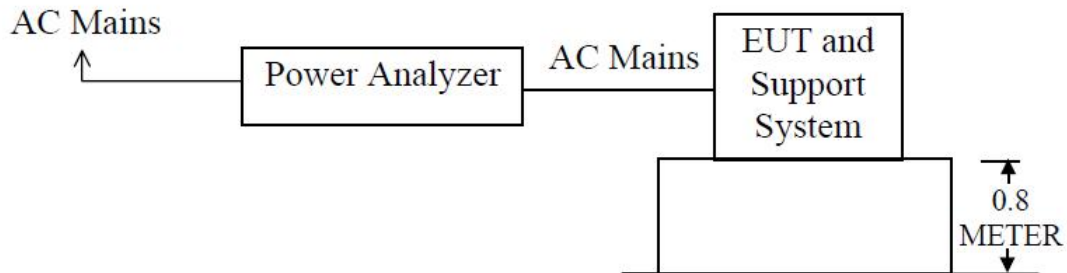

This test was performed as per EMC Basic Standard EN 61000-3-3

4.5.3 Limits of Voltage Fluctuation and Flicks Measurement

Test Item	Limit	Note
P_{st}	1.0	Pst means short-term flicker indicator
P_{lt}	0.65	Plt means long-term flicker indicator
T_{dt} (ms)	200	Tdt means maximum time that dt exceeds 3%.
d_{max} (%)	4	Dmax means maximum relative voltage change.
dc (%)	3.3	Dc means relative steady-state voltage change.

4.5.4 Test Equipment

Please refer to Section 2 this report.

4.5.5 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

4.5.6 Results


Port	EUT Operating mode	Result (Passed / Failed)
AC Input	N/A	N/A

Remark: The test item is not applicable.

5.0 Immunity Test

5.1 Electrostatic Discharge

5.1.1 Schematic of the test

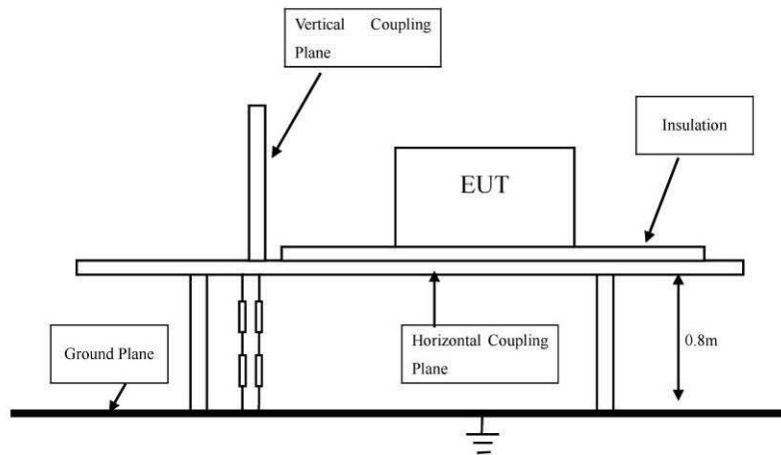

5.1.2 Test method

The test was performed in accordance with EN IEC 61000-6-1

5.1.3 Test severity

$\pm 4\text{kV}$ for direct & in-direct Contact Discharge

$\pm 8\text{kV}$ for air Discharge

Performance Criterion Require: **B**

5.1.4 Test Equipment

Please refer to Section 2 this report.

5.1.5 Test specification:

Environmental conditions: Temperature: 23°C Humidity: 54% Atmospheric pressure: 101.6kPa

5.1.6 Operation mode:

Mode 1 & Mode 2

5.1.7 Discharge location

- HCP
- VCP
- Shell

5.1.8 Test Result

Pass

Note: 1) Refer to section 3.5 for testing mode

2) All test modes were pre-tested, but we only recorded the worst case in this report.

5.2 RF field strength susceptibility (80MHz----- 1000MHz)

5.2.1 Test Method:


The test was performed in accordance with EN IEC 61000-6-1

Severity: Level 2 (3V/m)

Modulation: 1 KHz 80% AM

Performance Criterion Require: A

Block diagram of Test setup

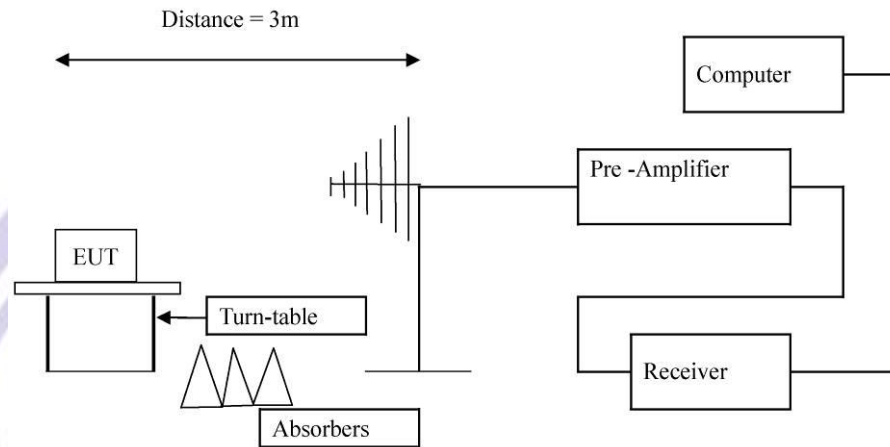

5.2.2 Test Equipment

Please refer to Section 2 this report.

5.2.3 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

5.2.4 Operation mode: Mode 1 & Mode 2

Note: 1) Refer to section 3.5 for testing mode

2) All test modes were pre-tested, but we only recorded the worst case in this report.


5.2.5 Test Result:

Please refer to the following table for individual results.

Frequency (MHz)	Radiation to	Polarity	Level (V/m)	Dwell Time(s)	Sweep Rate (%)	Results
80-1000	Front	H/V	3	1	1	Pass
80-1000	Rear	H/V	3	1	1	Pass
80-1000	Left	H/V	3	1	1	Pass
80-1000	Right	H/V	3	1	1	Pass
1400-6000	Front	H/V	3	1	1	Pass
1400-6000	Rear	H/V	3	1	1	Pass
1400-6000	Left	H/V	3	1	1	Pass
1400-6000	Right	H/V	3	1	1	Pass

5.3 Electrical Fast Transient/Burst (EFT/B) immunity test

5.3.1 Schematics of the test




5.3.2 Test Method

The test was performed in accordance with EN IEC 61000-6-1

Severity: Level 2 (1kV)

Performance Criterion Require: **B**

Block diagram of Test setup

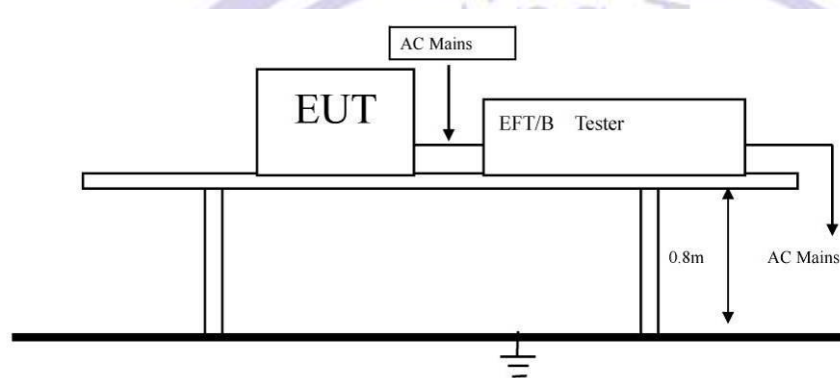

5.3.3 Test Equipment

Please refer to Section 2 this report.

5.3.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

5.3.5 Operation mode: N/A

5.3.6 Test Results


Inject location: AC mains

Inject Line	Voltage kV	Inject Times (s)	Method	Results
L	±1	120	Direct	N/A
N	±1	120	Direct	N/A
L、N	±1	120	Direct	N/A
E	±1	120	Direct	N/A
L、E	±1	120	Direct	N/A
N、E	±1	120	Direct	N/A
L、N、E	±1	120	Direct	N/A

Remark: The test item is not applicable.

5.4 Surge test

5.4.1 Schematics of the test




5.4.2 Test Method:

The test was performed in accordance with EN IEC 61000-6-1

Severity: Level 2

Performance Criterion Require: B

Block diagram of Test setup

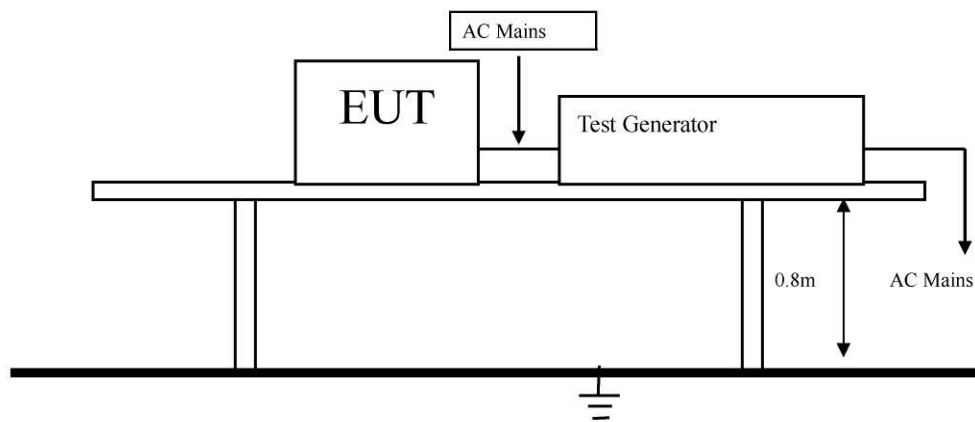

5.4.3 Test Equipment

Please refer to Section 2 this report.

5.4.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

5.4.5 Operation mode: N/A

5.4.6 Test Results


5 pulses for each polarity and test voltage, and repetition rate is 1 per min.

Location	Polarity	0°	90°	180°	270°	Results
L-N	± 1 KV	N/A	N/A	N/A	N/A	N/A
L-PE	± 2 KV	N/A	N/A	N/A	N/A	N/A
N-PE	± 2 KV	N/A	N/A	N/A	N/A	N/A

Remark: The test item is not applicable.

5.5 Conducted Immunity test

5.5.1 Schematics of the test

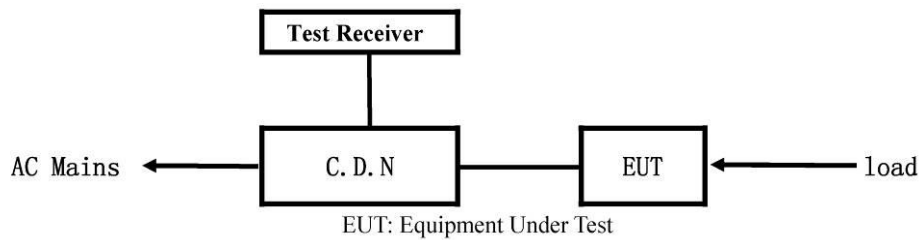


5.5.2 Test Method

The test was performed in accordance with EN IEC 61000-6-1

Severity: Level 2 (3 V rms), 0.15MHz—80MHz

Performance Criterion Require: A

Block diagram of Test setup

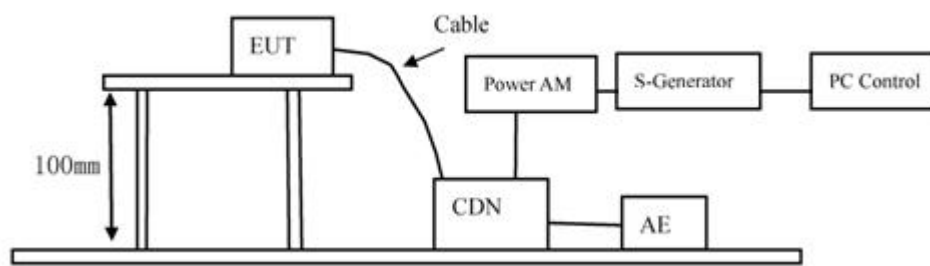

5.5.3 Test Equipment

Please refer to Section 2 this report.

5.5.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

5.5.5 Operation mode: N/A


5.5.6 Test Results:

Frequency Range (MHz)	Injected Position	Strength	Criterion	Result
0.15 - 80	AC Line	3V (rms) Unmodulated	A	N/A

Remark: The test item is not applicable.

5.6 Power-Frequency magnetic field test

5.6.1 Schematics of the test




5.6.2 Test Method

The test was performed in accordance with EN IEC 61000-6-1

Severity: Level 1 (1A/m),

Performance Criterion Require: A

Block diagram of Test setup

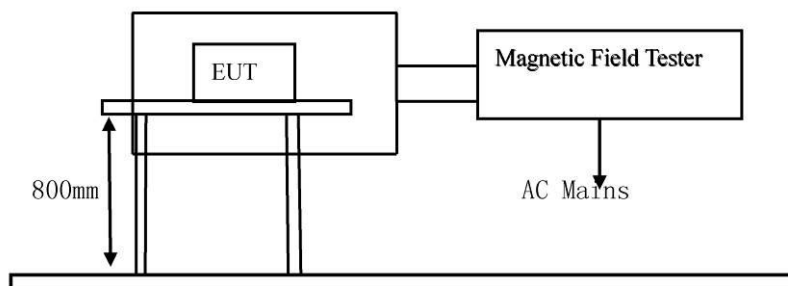

5.6.3 Test Equipment

Please refer to Section 2 this report.

5.6.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

5.6.5 Operation mode: N/A


5.6.6 Test Results:

Test Level	Testing Duration	Coil Orientation	Criterion	Result
1A/m	5 Mins	X	A	N/A
1A/m	5 Mins	Y	A	N/A
1A/m	5 Mins	Z	A	N/A

Remark: The test item is not applicable.

5.7 Voltage Dips/Interruptions immunity test

5.7.1 Schematics of the test




5.7.2 Test Method:

The test was performed in accordance with EN IEC 61000-6-1

Performance Criterion Require: C&B

Block diagram of Test setup

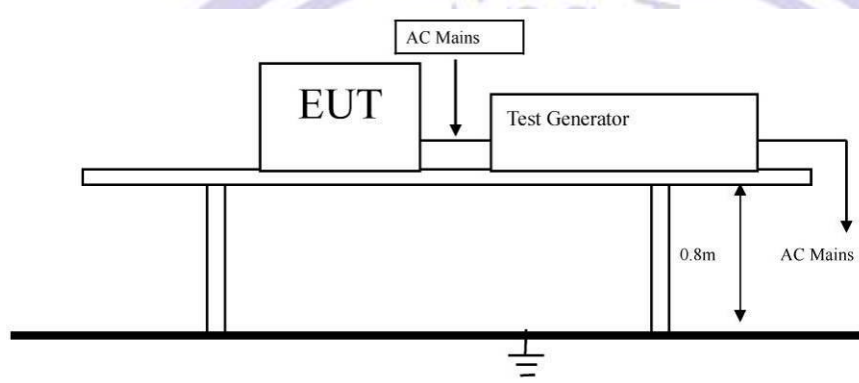

5.7.3 Test Equipment

Please refer to Section 2 this report.

5.7.4 Test specification:

Environmental conditions: Temperature: 23° C Humidity: 54% Atmospheric pressure: 101.6kPa

5.7.5 Operation mode:

N/A

5.7.6 Test Result:

Voltage Dip: Voltage Interceptions:

Test Level % Ut	Reduction	Duration (periods)	Phase Angle	Meet Criterion	Result
0	100	0.5	0° - 360°	B	N/A
0	100	1	0° - 360°	C	N/A
70	30	25	0° - 360°	C	N/A
0	100	250	0° - 360°	C	N/A

Remark: The test item is not applicable.

6.0 CE Label

6.1 label specification


Text of the mark is black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.

6.2 Mark Location: On the product body






7.0 Photos of testing

Radiated Emission Test View

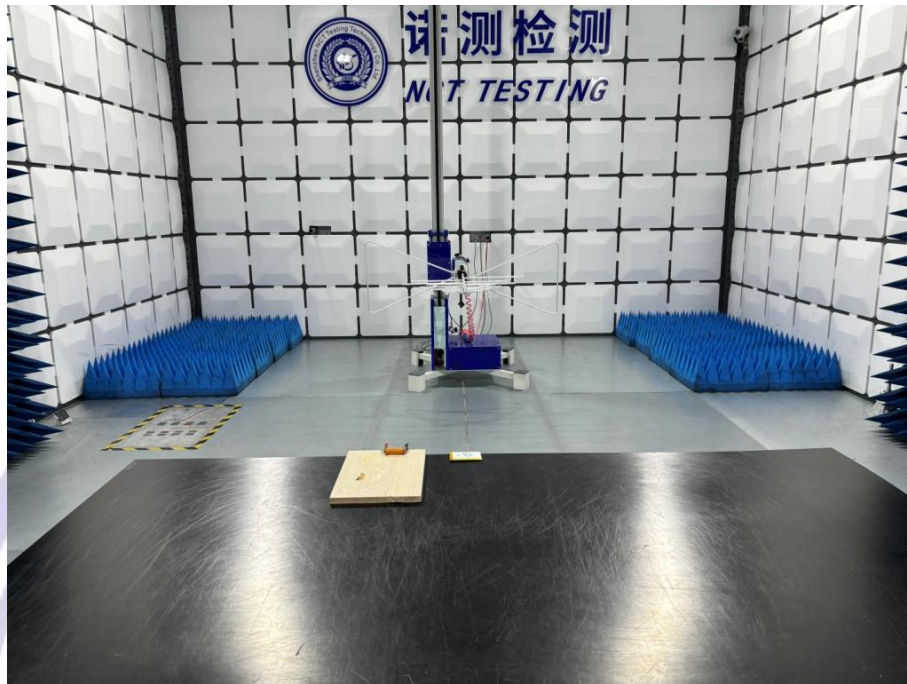

ESD Test View

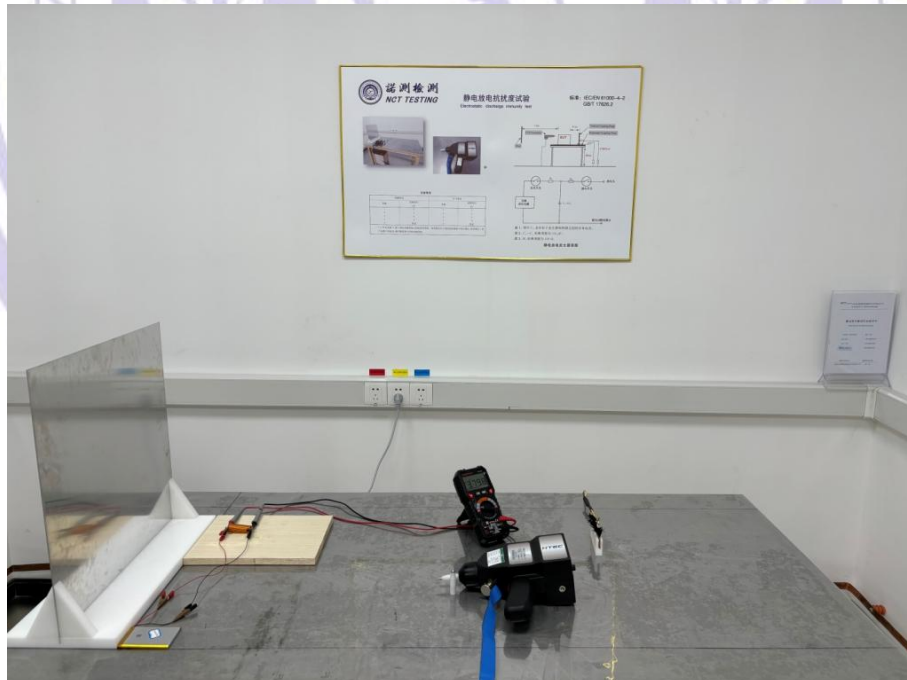

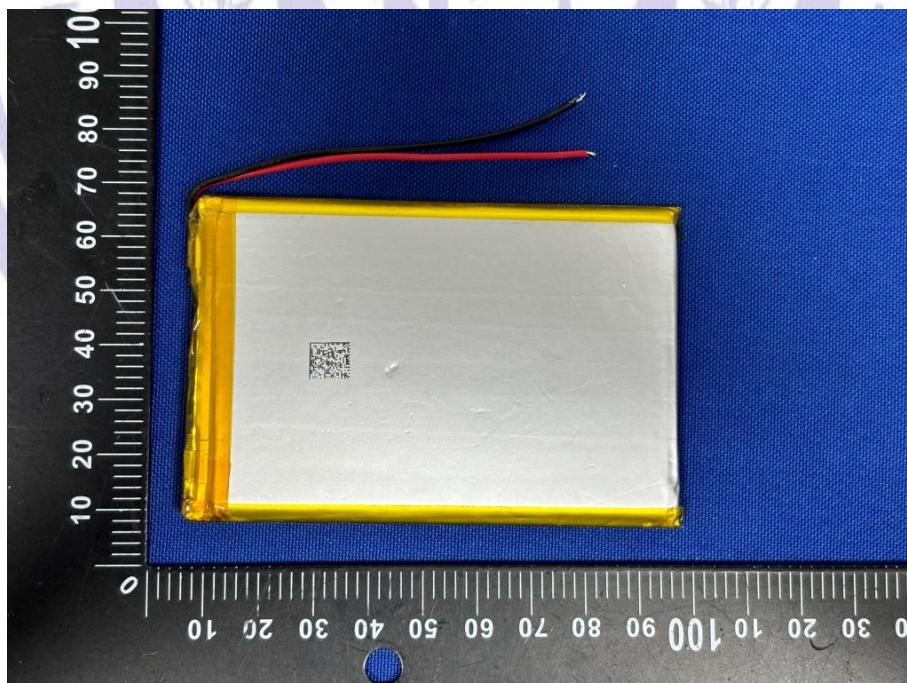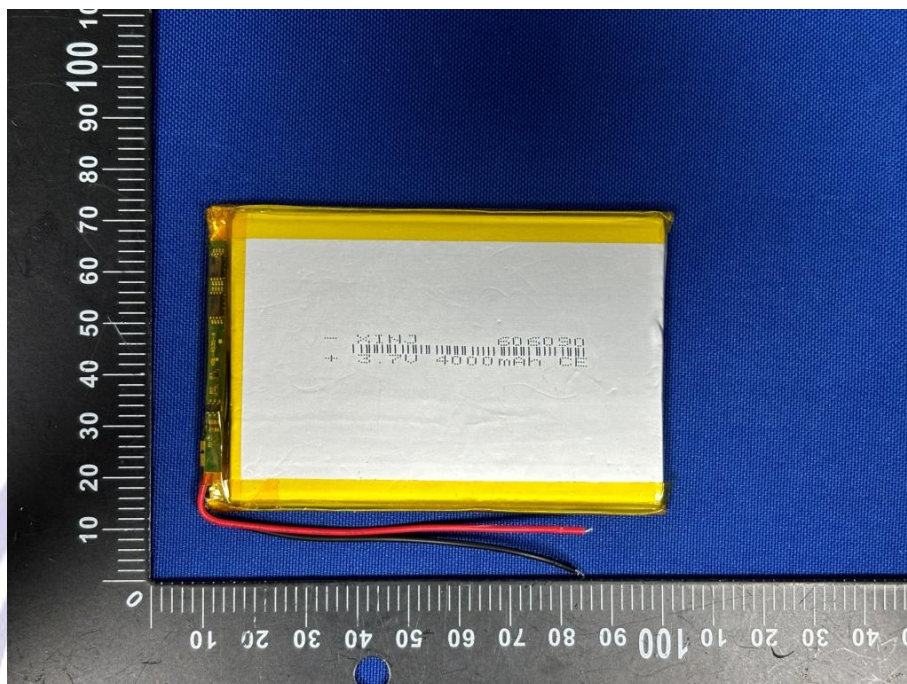8.0 Photos of the EUT

--End of the report--