
Assignment

Module 3.3 Configuring Basic Network Hardware Theory

1. **Log in to your home Wi-Fi router's admin panel using its default IP address (usually 192.168.0.1 or 192.168.1.1) and take a screenshot of the login page.


Hint: If you don't know your router's IP, open Command Prompt and run 'ipconfig' — look for 'Default Gateway'.**

➢

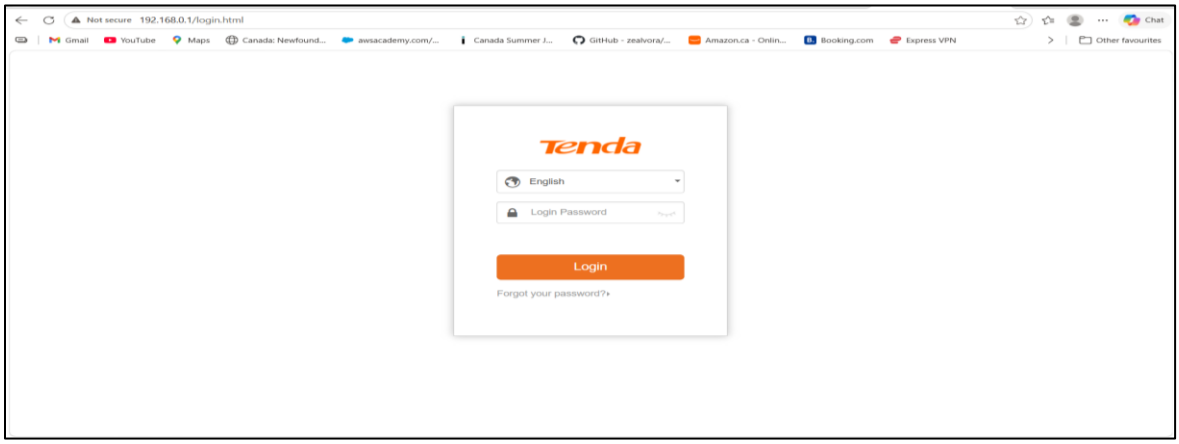

2. **Find and note down the current IP address, subnet mask, and default gateway assigned to your laptop or mobile device when connected to your Wi-Fi network.**

➢

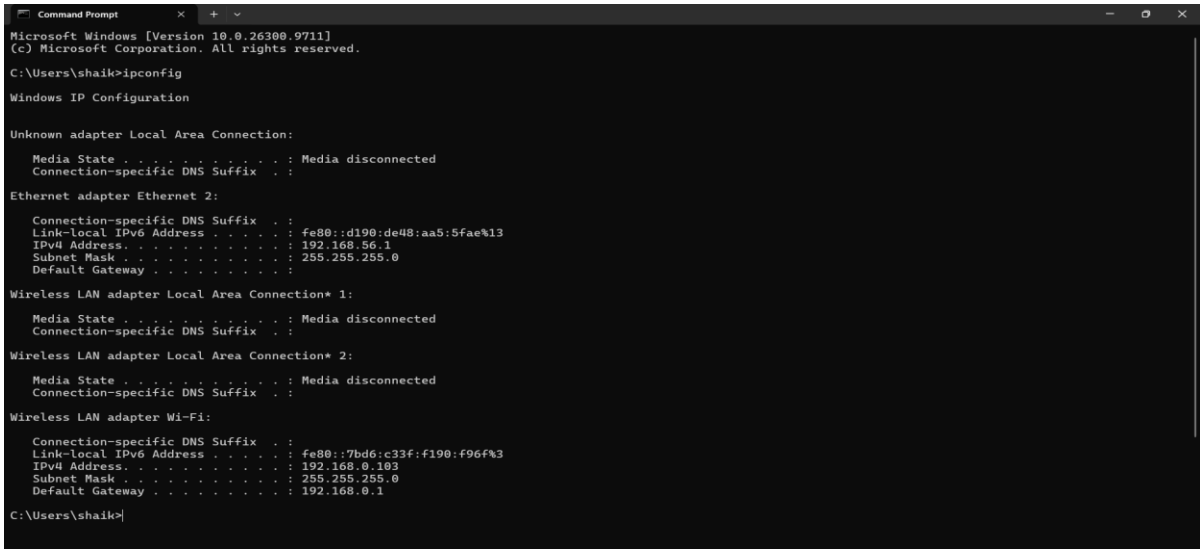



3. **Change your device's IP address from 'Obtain IP automatically' (DHCP) to a static IP in the same range as your router (for example, set it to 192.168.1.50 if your router is 192.168.1.1), and test if you still have internet**

**access.

Constraint: Remember to revert to automatic/DHCP after testing to avoid network issues.**


➢

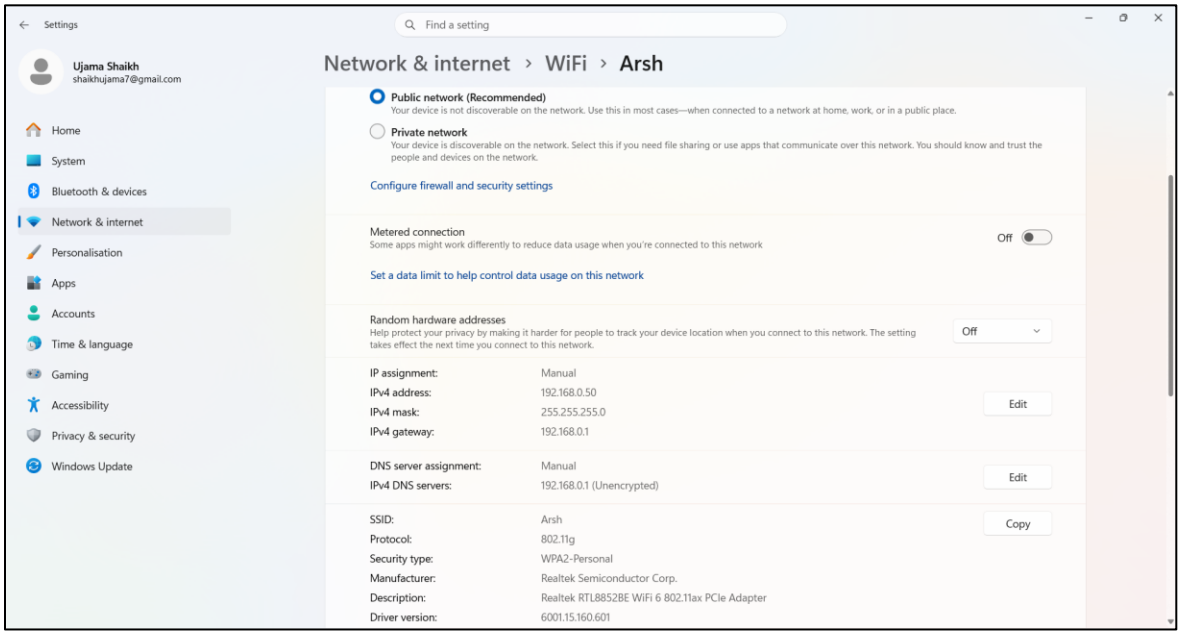

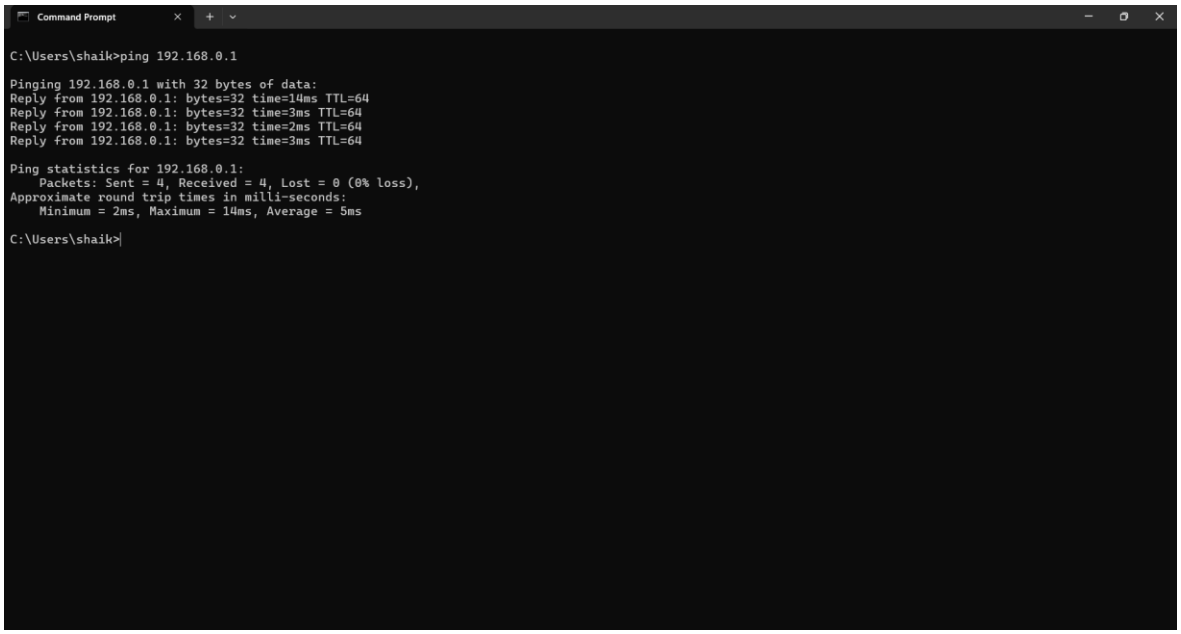

4. **In your router's admin panel, locate the section where you can view or change the DHCP range. Write down the current range, and explain in 2-3 lines what would happen if two devices are assigned the same IP address in this range.**

➢

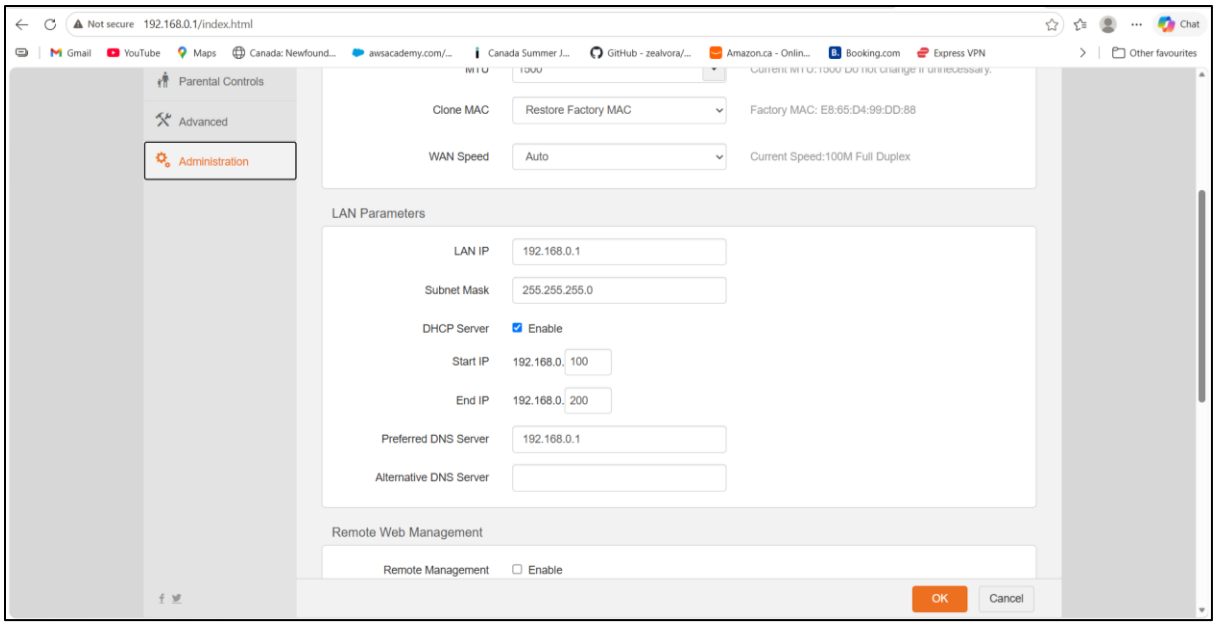

When two devices on the same local network get the same IP address, it creates an IP address conflict. This can send network traffic to the wrong place, and one or both devices might lose their connection or have spotty network access. DHCP usually stops this from happening, but if you manually set an address that's already being used, it can cause problems.