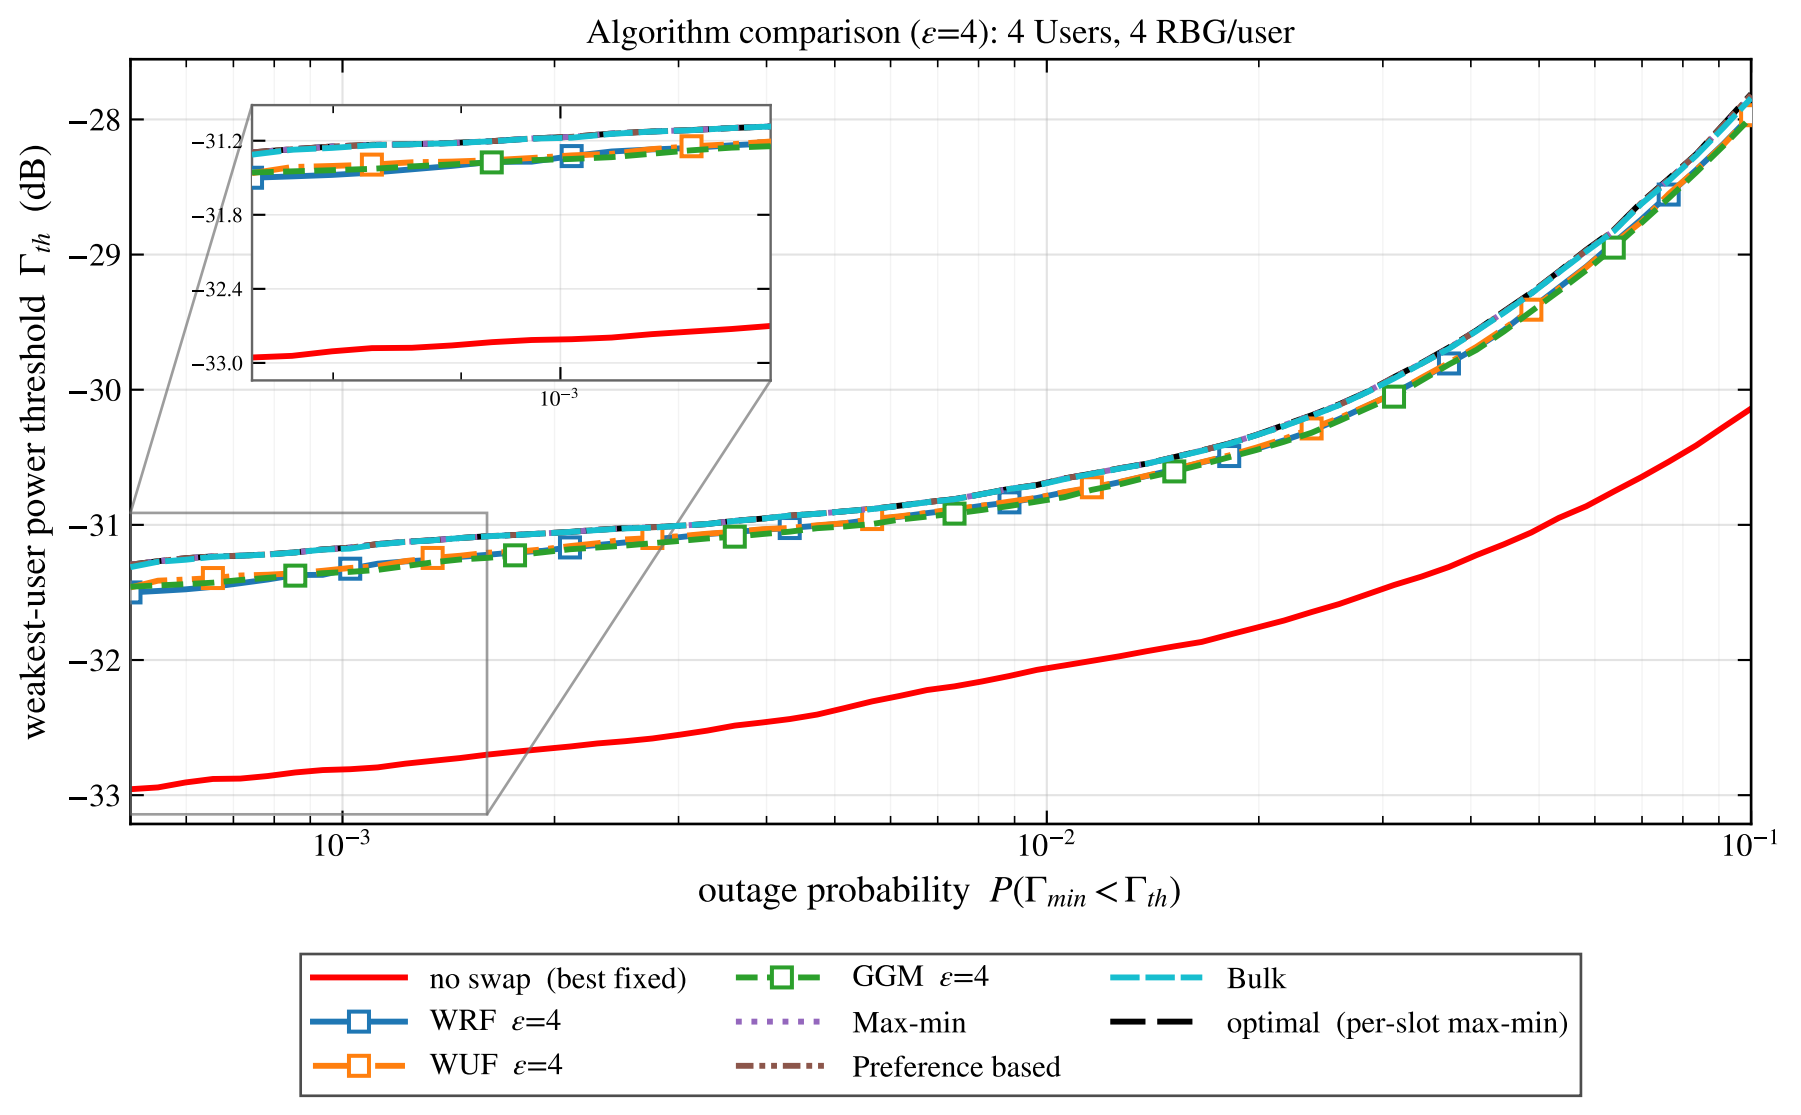
Algorithm comparison (ε=4): 4 Users, 4 RBG/user
weakest-user power threshold Γth (dB)
outage probability P(Γmin < Γth)
−28
−29
−30
−31
−32
−33
10−3
10−2
10−1
−31.2
−31.8
−32.4
−33.0
10−3
no swap (best fixed)
WRF ε=4
WUF ε=4
GGM ε=4
Max-min
Preference based
Bulk
optimal (per-slot max-min)