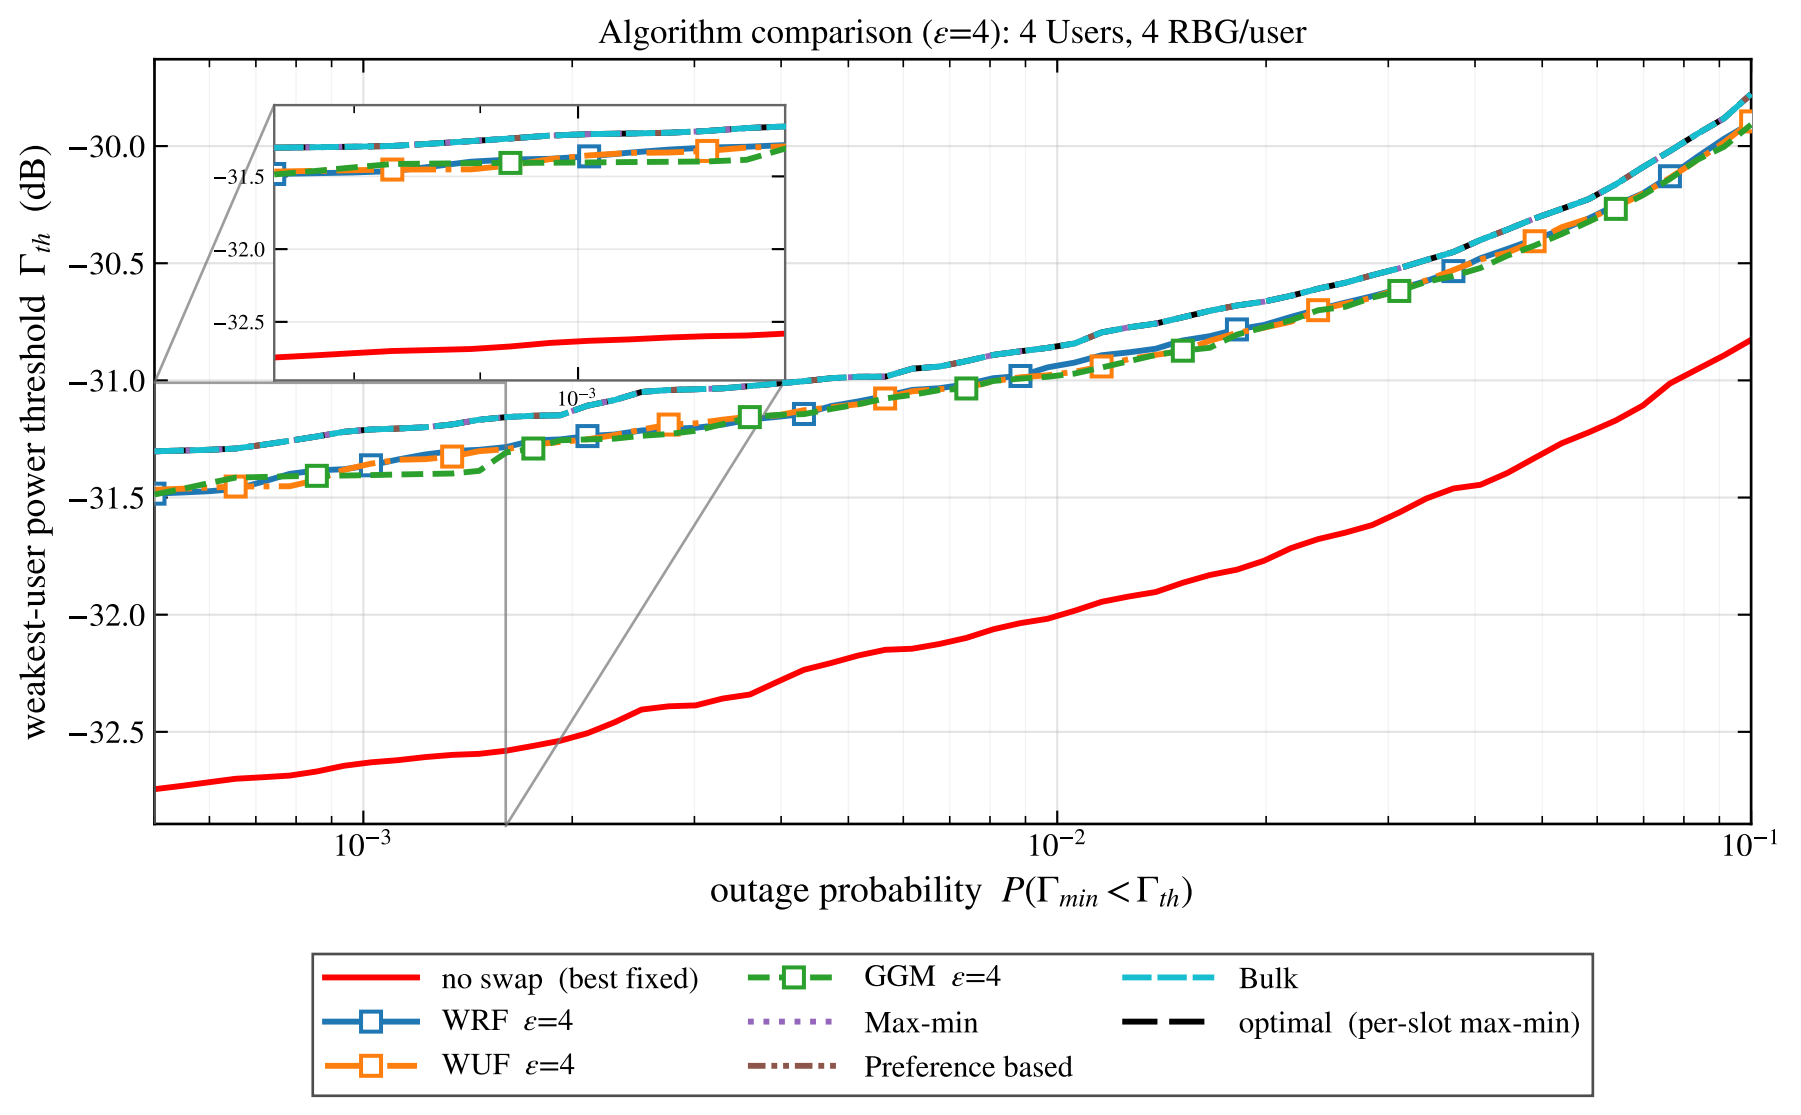
Algorithm comparison (ε=4): 4 Users, 4 RBG/user
weakest-user power threshold Γ_th (dB)
−30.0
−30.5
−31.0
−31.5
−32.0
−32.5
−31.5
−32.0
−32.5
10^−3
10^−3
10^−2
10^−1
outage probability P(Γ_min < Γ_th)
no swap (best fixed)
WRF ε=4
WUF ε=4
GGM ε=4
Max-min
Preference based
Bulk
optimal (per-slot max-min)