

## NPS LAB EXPERIMENT-3

Configuration of basic switch setup using Huawei/Cisco network switch.

Step 1: Open the Cisco packet tracer.

Step 2: Drag and drop three PC'S and one switch. connect pc's to switch through automatic cable wire.

Step 3: Double click on the pc and go to Desktop and in that click on ipconfig.

Step 4: Name the ip address of the each pc and click on pc 1.


Step 5: Go to command prompt in the desktop and type ping command with other ip address. And it replies from other pc's.

Pc 0 ip address:10.0.0.1

Pc 1 ip address:10.0.0.2

Pc 2 ip address:10.0.0.3

Step 6: Save the file with a name.

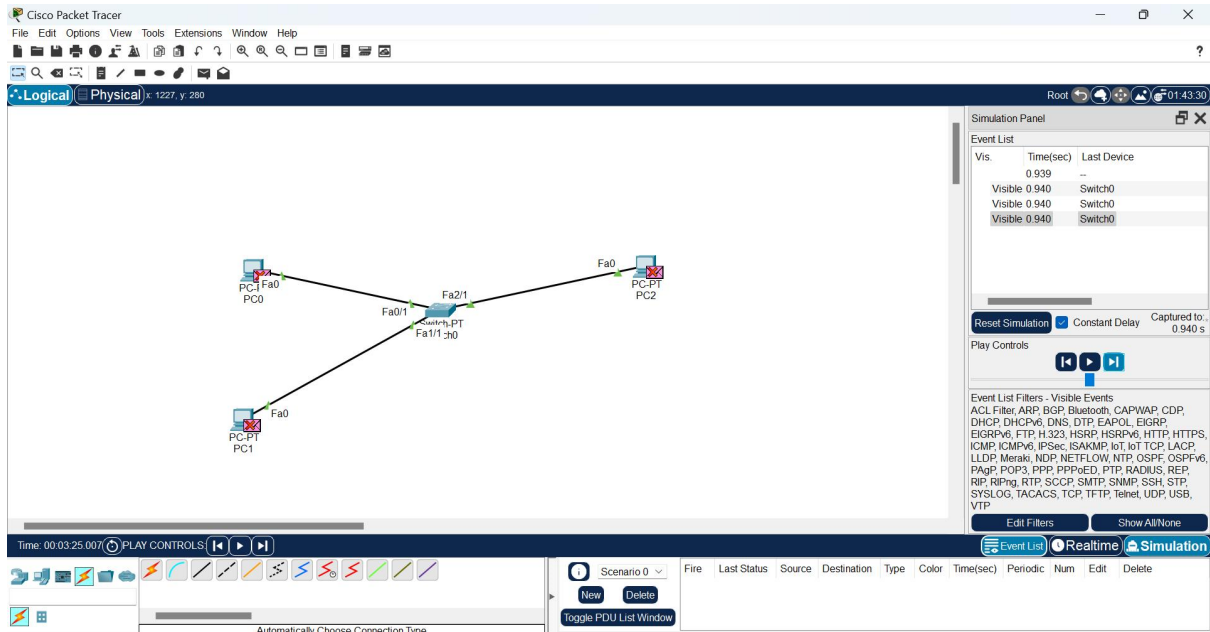

It is pinging from pc0 to pc3,pc0 to pc2.

