



16-pin SIL header connector for
RGB and Hsync/Vsync signals

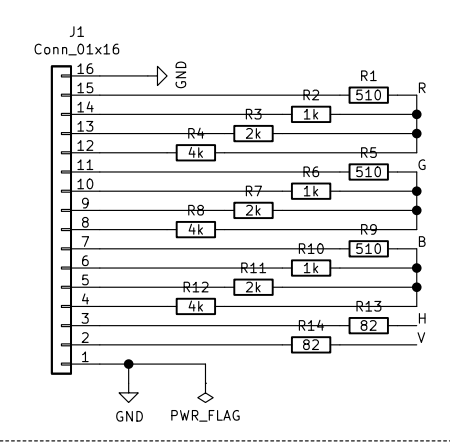

DE-15F recommended connector
for the VGA board

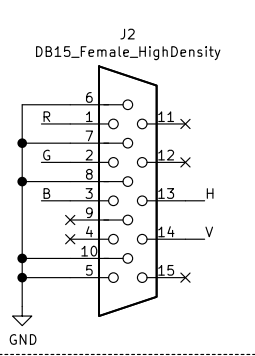

2^{12} =4096 different colors
12 bits per pixel (bpp)
 2^4 =16 different red, green and blue tonalities
4 bits per color channel/sample (bps)

Ulices AH

Sheet: /
File: VGA.sch

Title: 12-bit RGB color for VGA module / 4-bit color depth

Size: A4	Date: 2019-12-13	Rev: 1.1
KiCad E.D.A. kicad 5.1.5-52549c584ubuntu18.04.1	Id: 1/1	