Ultra Marine®
PREMIUM & ULTRA SAFE

PRICE LIST

2026 retail price list ex. VAT valid from 1st January 2026

Products in stock for delivery in 3-5 working days



ULTRA MARINE ANCHORS	
UA05	676 €
UA08	908 €
UA12	1 196 €
UA16	1 523 €
UA21	1 937 €
UA27	2 428 €
UA35	3 039 €
UA45	3 818 €
UA60	5 135 €
UA80	6 934 €
UA100	8 951 €
UA130	11 927 €
UA160	14 963 €
UA200	19 005 €
UA250	25 422 €
UA300	30 625 €
UA360	36 250 €



ULTRA MARINE FLIP SWIVEL & HOOK	
UFS 6-12	281 €
UFS 8-21	334 €
UFS 10-35	391 €
UFS 13-60	554 €
UFS 16-110	832 €
UFS 20-160	1 553 €
UFS 26-250	3 811 €
UFS 32-360	7 749 €

ULTRA MARINE ANCHOR RING	
UAR27	585 €
UAR45	768 €
UAR80	868 €






ULTRA MARINE BOW ROLLER	
UBR05	369 €
UBR08	499 €
UBR12	596 €
UBR16	686 €
UBR21	932 €
UBR27	1 043 €
UBR35	1 435 €
UBR45	1 602 €
UBR60	2 050 €
UBR80	3 000 €
UBR100	3 466 €
UBR130	4 137 €
UBR160	6 074 €
UBR200	6 987 €
UBR250	8 758 €
UBR300	10 510 €
UBR360	12 644 €



ULTRA MARINE BOW ROLLER CAR	
UBRC5	231 €
UBRC8	312 €
UBRC12	373 €
UBRC16	429 €
UBRC21	583 €
UBRC27	652 €
UBRC35	897 €
UBRC45	1 001 €
UBRC60	1 281 €
UBRC80	1 874 €
UBRC100	2 166 €
UBRC130	2 585 €
UBRC160	3 796 €
UBRC200	4 368 €
UBRC250	6 138 €
UBRC300	7 364 €
UBRC360	8 838 €

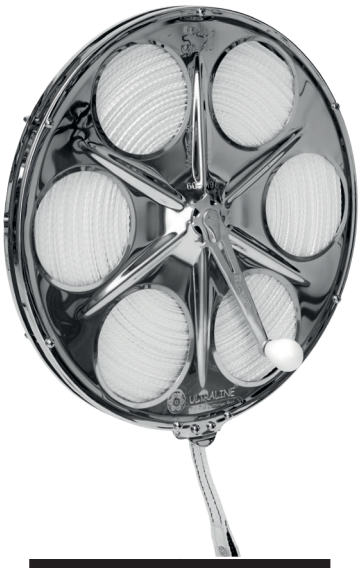

ULTRALINE DYNEEMA	
UL-D40	1 242 €
UL-D60	1 560 €
UL-D80	2 004 €
UL-D100	2 371 €



ULTRA MARINE TRIP HOOK	
UTH-S	150 €
UTH-B	314 €



ULTRA MARINE CHAIN GRAB	
UCG06	50 €
UCG08	60 €
UCG10	107 €
UCG13	130 €
UCG16	230 €
UCG20	364 €

Ultra Marine Europe s. r. o., Jankovcova 1587/8, Prague, Czech Republic;
T: +420 283 870 032, M: +420 603 920 777, E: jan@ultramarine-anchors.com
Exclusive European distributor. Prices do not include shipping from Prague, Czech Republic and are calculated excluding VAT.

Your dealer contact information

Ultra Marine®
PREMIUM & ULTRA SAFE



PRICE LIST

PRICE LIST - 2026 retail price list ex. VAT

MADE IN EUROPE • ENGINEERED WITH PRECISION

ULTRA MARINE CHAINS

Standard

Windlass Anchor Chains Grade 60
AISI 316L stainless steel, bright polished, measures acc. to DIN 766 and ISO 4565

Type	Norm	d mm	t mm	b2 max. mm	kg/m	Breaking load kg	Price €/m
UC-SD6-L	DIN 766	6	18,5	20,8	0,780	3 000 kg	**25.42 €**
UC-SD8-L	DIN 766	8	24	27,2	1,350	5 300 kg	**41.40 €**
UC-SD10-L	DIN 766	10	28	36	2,300	8 500 kg	**66.17 €**
UC-SD13-L	DIN 766	13	36	47	3,900	12 500 kg	**112.71 €**
UC-SD14-L	DIN 766	14	41	50	4,400	15 400 kg	**147.41 €**
UC-SD16-L	DIN 766	16	45	58	5,800	20 000 kg	**185.82 €**
UC-SI6-L	ISO 4565	6	18	21,6	0,800	3 000 kg	**25.99 €**
UC-SI8-L	ISO 4565	8	24	28,8	1,400	5 300 kg	**42.65 €**
UC-SI10-L	ISO 4565	10	30	36	2,200	8 500 kg	**64.79 €**
UC-SI12-L	ISO 4565	12	36	43,2	3,200	11 300 kg	**92.58 €**

Premium

Windlass Anchor Chains Grade 60 PLUS
AISI 318LN Duplex stainless steel, bright polished, measures acc. to DIN 766 and ISO 4565

Type	Norm	d mm	t mm	b2 max. mm	kg/m	Breaking load kg	Price €/m
UC-SD6-LN	DIN 766	6	18,5	20,8	0,780	3 850 kg	**30.40 €**
UC-SD8-LN	DIN 766	8	24	27,2	1,350	6 700 kg	**48.79 €**
UC-SD10-LN	DIN 766	10	28	36	2,300	10 800 kg	**79.20 €**
UC-SD13-LN	DIN 766	13	36	47	3,900	18 000 kg	**131.82 €**
UC-SD14-LN	DIN 766	14	41	50	4,400	21 000 kg	**172.74 €**
UC-SD16-LN	DIN 766	16	45	58	5,800	26 000 kg	**219.85 €**
UC-SI6-LN	ISO 4565	6	18	21,6	0,800	3 850 kg	**31.27 €**
UC-SI8-LN	ISO 4565	8	24	28,8	1,400	6 700 kg	**50.68 €**
UC-SI10-LN	ISO 4565	10	30	36	2,200	10 800 kg	**77.45 €**
UC-SI12-LN	ISO 4565	12	36	43,2	3,200	14 000 kg	**108.29 €**

ⓘ Other dimensions and special configurations available on request.

Ultra Marine®
PREMIUM & ULTRA SAFE

ULTRA MARINE CHAIN

Stainless steel anchor chains



Ultra Marine Chain stainless-steel anchor chains combine high tensile strength, precise geometry and excellent corrosion resistance for demanding marine applications. Every chain is precisely calibrated to ensure smooth and reliable operation through the windlass. A controlled surface-treatment process provides a bright, smooth finish and increased long-term resistance in the marine environment. Manufactured in Europe engineering with precision, the range combines European production with demanding technical standards for the marine market.

European manufacturing. Engineered with precision.

Ultra Marine Chain is manufactured in Europe, combining precision engineering with strict production control and demanding technical specifications to deliver consistent, top-tier marine-grade quality you can rely on.

Advantages of 318LN Duplex

- Higher corrosion resistance
- PREN ≥ 35
- Higher breaking load at the same diameter
- Suitable for all bodies of water
- Resistant to seawater up to 35 °C

STANDARD – Grade 60

AISI 316L stainless steel, bright polished. A reliable marine chain for everyday anchoring use, combining proven corrosion resistance, precise calibration and smooth windlass operation. Available in DIN 766 and ISO 4565 versions.

PREMIUM – Grade 60 PLUS

AISI 318LN Duplex stainless steel, bright polished. Higher strength and enhanced corrosion resistance for demanding applications. Duplex construction provides superior mechanical performance and excellent durability in aggressive marine environments.

Precision calibrated


Ultra Marine Chain anchor chains are precisely calibrated to approximately one tenth of a millimetre for smooth and reliable engagement with the windlass gypsy. Correct chain geometry supports stable running, reduced jumping and consistent anchoring performance.

Pickled, passivated and bright finished as standard

Pickling removes residues and potential contamination from the stainless-steel surface. The subsequent passivation process promotes formation of a continuous protective passive layer. The result is a clean, smooth and bright finish with significantly improved long-term corrosion resistance.

Technical data

Material	Pren	Corrosion resistance class	Corrosion resistance
A2 AISI 304	17.50	CRC II	Low
A4 AISI 316L	23.10 - 28.35	CRC III	Medium
Standard Duplex AISI 318LN	30.85 - 38.07	CRC IV	High
Ultra Marine Chain Duplex AISI 318LN	**min. 35.00**	**CRC IV**	**High**

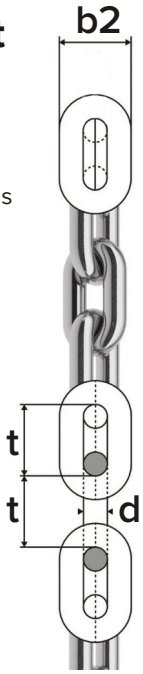

Ø / d = diameter

t = pitch

b2 = inside width

Ultra Marine®
PREMIUM & ULTRA SAFE

PRICE LIST

2026 retail price list ex. VAT



MADE IN EUROPE • ENGINEERED WITH PRECISION

ULTRA MARINE GALVANIZED CHAINS

DIN 766 — Grade 70

Hot-dip galvanized anchor chains
High strength, reliable performance for everyday anchoring use.

Type	Norm	d mm	t mm	b2 max. mm	Weight kg/m	Breaking load kg	Price €/m
UC-GD670	DIN 766	6	18,5	20	0,780	3 960 kg	**7.61 €**
UC-GD870	DIN 766	8	24	26	1,350	7 100 kg	**10.87 €**
UC-GD1070	DIN 766	10	28	34	2,300	11 200 kg	**17.71 €**
UC-GD1370	DIN 766	13	36	44	3,900	19 000 kg	**29.04 €**
UC-GD1670	DIN 766	16	45	53	5,800	28 200 kg	**43.11 €**

ISO 4565 — Grade 70

Hot-dip galvanized anchor chains
Reliable quality for international applications.

Type	Norm	d mm	t mm	b2 max. mm	Weight kg/m	Breaking load kg	Price €/m
UC-GI670	ISO 4565	6	18	20,9	0,800	3 960 kg	**7.77 €**
UC-GI870	ISO 4565	8	24	27,8	1,400	7 100 kg	**11.16 €**
UC-GI1070	ISO 4565	10	30	35	2,200	11 200 kg	**17.61 €**
UC-GI1270	ISO 4565	12	36	42	3,200	16 000 kg	**22.99 €**

ⓘ Coding example: **UC-GD870** = ULTRA Marine Chain / Galvanized / DIN / 8 mm / Grade 70

Proven performance for demanding applications


Ultimate Chain Grade 70 combines high mechanical strength, reliable calibration and a durable hot-dip galvanized finish, making it a strong choice for OEM, B2B and demanding end-customer anchoring applications.

Breaking force test 8x24 mm performance comparison

Anchor chain	Proof force	Breaking force
Grade 70	45 kN	77.8 kN
Grade 40	20.1 kN	44.8 kN
Standard anchor chain	20 kN	30.1 kN

Technical highlights

- ✔ Hot-dip galvanized anchor chains for demanding marine applications
- ✔ Carefully selected chain steels
- ✔ Bent and welded using modern machinery
- ✔ Quenched and tempered to optimize mechanical properties
- ✔ Clean and durable galvanized coating
- ✔ Available in DIN 766 and ISO 4565 versions
- ✔ Other dimensions available on request
- ✔ Also available with welded-in larger links on request



Ø / d = diameter
t = pitch
b2 = inside width

Ultra Marine®
PREMIUM & ULTRA SAFE

COMPLETE YOUR ANCHORING SYSTEM



Hand-crafted in Europe. Engineered for ultimate safety and uncompromised aesthetics

PREMIUM STANDARD PRODUCTS

FLIP SWIVEL




Fabricated with a unique flipping nub that always turns your anchor into the right position onto the bow roller.

ULTRALINE



Premium flat-rope reel system with Dyneema. The best solution for stern anchoring, offering easy and space-saving storage.

BOWROLLER



Features a smooth swing mechanism ensuring easy, controlled release and secure seating of your ULTRA Anchor.

RING




Your ultimate anchor rescue tool.
An innovative and safe solution for snagged anchor retrieval and tandem anchoring.

HOOK



Safely distributes load from the windlass to the cleats, significantly reducing chain stress and absorbing shock loads.


OEM SOLUTIONS




ARM SYSTEM
Ideal for inverted and vertical bows. Operates smoothly on windlass tension alone.



CATAPULT SYSTEM
For bows with limited space. Silent electric operation.



THROUGH-HULL SYSTEM
Exceptionally compact. Anchor remains fully concealed.



TELESCOPIC SYSTEM
Rigid 30 cm extension. Operates on windlass tension.

Discover our full range of OEM solutions online

Ultra Marine Europe s.r.o. | info@ultramarine-anchors.com | +420 283 870 032

Ultra Marine®
PREMIUM & ULTRA SAFE

ULTRA MARINE ANCHOR SELECTION CHART

CHOOSE THE CORRECT ULTRA MARINE ANCHOR FOR YOU
SÉLECTIONNEZ L'ANCRE ULTRA ADAPTÉE A VOS BESOINS
WAHLEN SIE DEN RICHTIGEN ULTRA ANKER

Recommended UM Anchor weight		Sail boat			Power boat					Catamaran					Recommended DIN 766 Chain diameter	Recommended Swivel
		Mono-hull			High profile			Low profile		Sail			Power			
		Boat weight	Boat length		Boat weight	Boat length		Boat length		Boat weight	Boat length		Boat length			
kg	lbs	ton	m	feet	ton	m	feet	m	feet	ton	m	feet	m	feet	mm	#
5	11	1	5	17	1.1	5.2	17	5.7	19	0.7	4.3	14	4.6	15	5	UFS 6-12
8	18	2	7	23	2.2	7.2	24	7.9	26	1.4	6.1	20	6.4	21	6	UFS 6-12
12	26	3.8	9	30	4.2	9.3	31	10.2	33	2.7	7.8	26	8.2	27	6	UFS 6-12
16	35	6.3	10.8	35	6.9	11.1	36	12.2	40	4.5	9.3	31	9.8	32	6 - 8	UFS 8-21
21	46	10.2	12.6	41	11.2	13	43	14.3	47	7.3	10.9	36	11.5	38	8	UFS 8-21
27	60	14.6	14.3	47	16	14.7	48	16.2	53	10.5	12.4	41	13	43	8 - 10	UFS 10-35
35	77	21.5	16	52	23.5	16.5	54	18.2	60	15.6	13.8	45	14.6	48	10	UFS 10-35
45	100	30	17.8	58	32.9	18.3	60	20.1	66	21.6	15.4	51	16.2	53	10 - 12	UFS 13-60
60	132	43	20	66	47.1	20.6	68	22.7	74	31	17.3	58	18.2	60	12 - 13	UFS 13-60
80	176	63	22.3	73	69	23	75	25.3	83	45.4	19.3	63	20.3	67	13	UFS 16-100
100	220	85	24.5	80	93	25.2	83	27.7	91	61	21.2	70	22.3	73	14	UFS 16-110
130	290	123	27.4	90	135	28.2	93	31	102	89	23.7	78	25	82	14 - 16	UFS 20-160
200	350	174	30.4	100	191	31.3	103	34.4	113	125	26.3	86	27.7	91	16	UFS 20-160
250	440	262	34.4	113	287	35.4	116	39	128	190	29.8	98	31.3	103	18	UFS 26-250
250	550	400	39.2	129	438	40.4	133	44.4	146	290	33.9	111	35.7	117	20	UFS 26-250
300	660	550	44	144	600	45.3	149	49.8	163	400	38.1	125	40	131	22	UFS 32-380
360	800	760	50	164	830	51.5	169	56.7	186	550	43.3	142	45.5	150	23	UFS 32-380

WARRANTY: The anchor selection should be based on the largest recommended anchor according to the boat's fully loaded weight and length, as indicated in the selection table. Windage should also be taken into account. One size smaller may be sufficient where recommended. The selected anchor, when chosen in accordance with the recommended sizing guidelines, is covered by a lifetime warranty, subject to the applicable terms and conditions.

GARANTIE: Le choix de l'ancre doit se porter sur la plus grosse ancre préconisée, en fonction du poids du bateau (entièrement équipé) et de sa longueur, comme indiqué sur le tableau de sélection. La dérive due au vent doit également être prise en compte. Une taille inférieure doit être suffisante compte tenu des recommandations indiquées. L'ancre sélectionnée, conforme aux recommandations de taille, est couverte par une garantie à vie (sous réserve des conditions d'application).

GARANTIE: Die Ankerwahl sollte auf dem größten empfohlenen Anker basieren, je nach Bootsgewicht (voll beladen) und Länge, gemäß der Auswahl in der Tabelle. Ventilationsverlust muss berücksichtigt werden. Eine Größe kleiner kann gemäß den Empfehlungen ausreichend sein. Der ausgewählte Anker ist bei Einhaltung der empfohlenen Größenangaben durch eine lebenslange Garantie abgedeckt (vorbehaltlich der geltenden Bedingungen).