
Added 2 sized gears to change the top speed/torque of the motors to suit what we needed

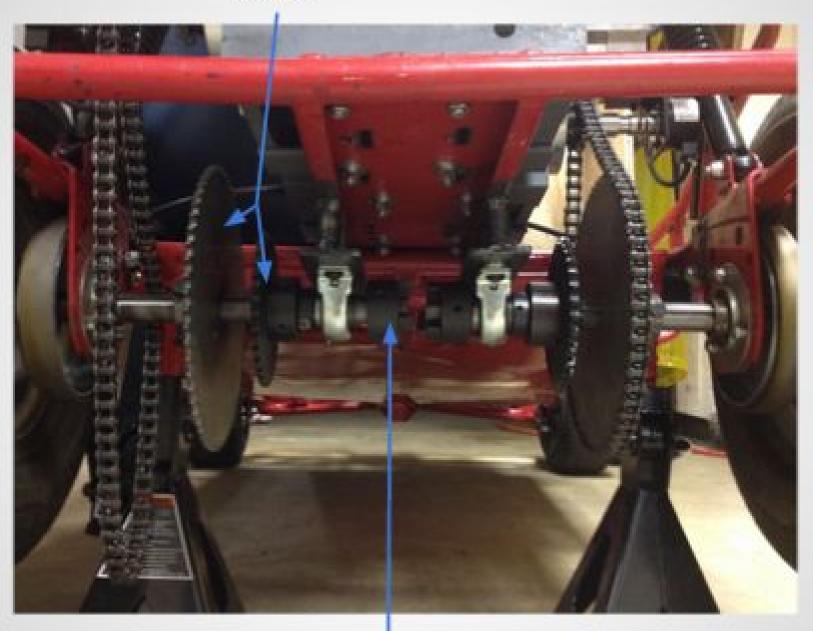

Split the axle and added a 3 jaw coupler so we can choose between solid axle and split axle.