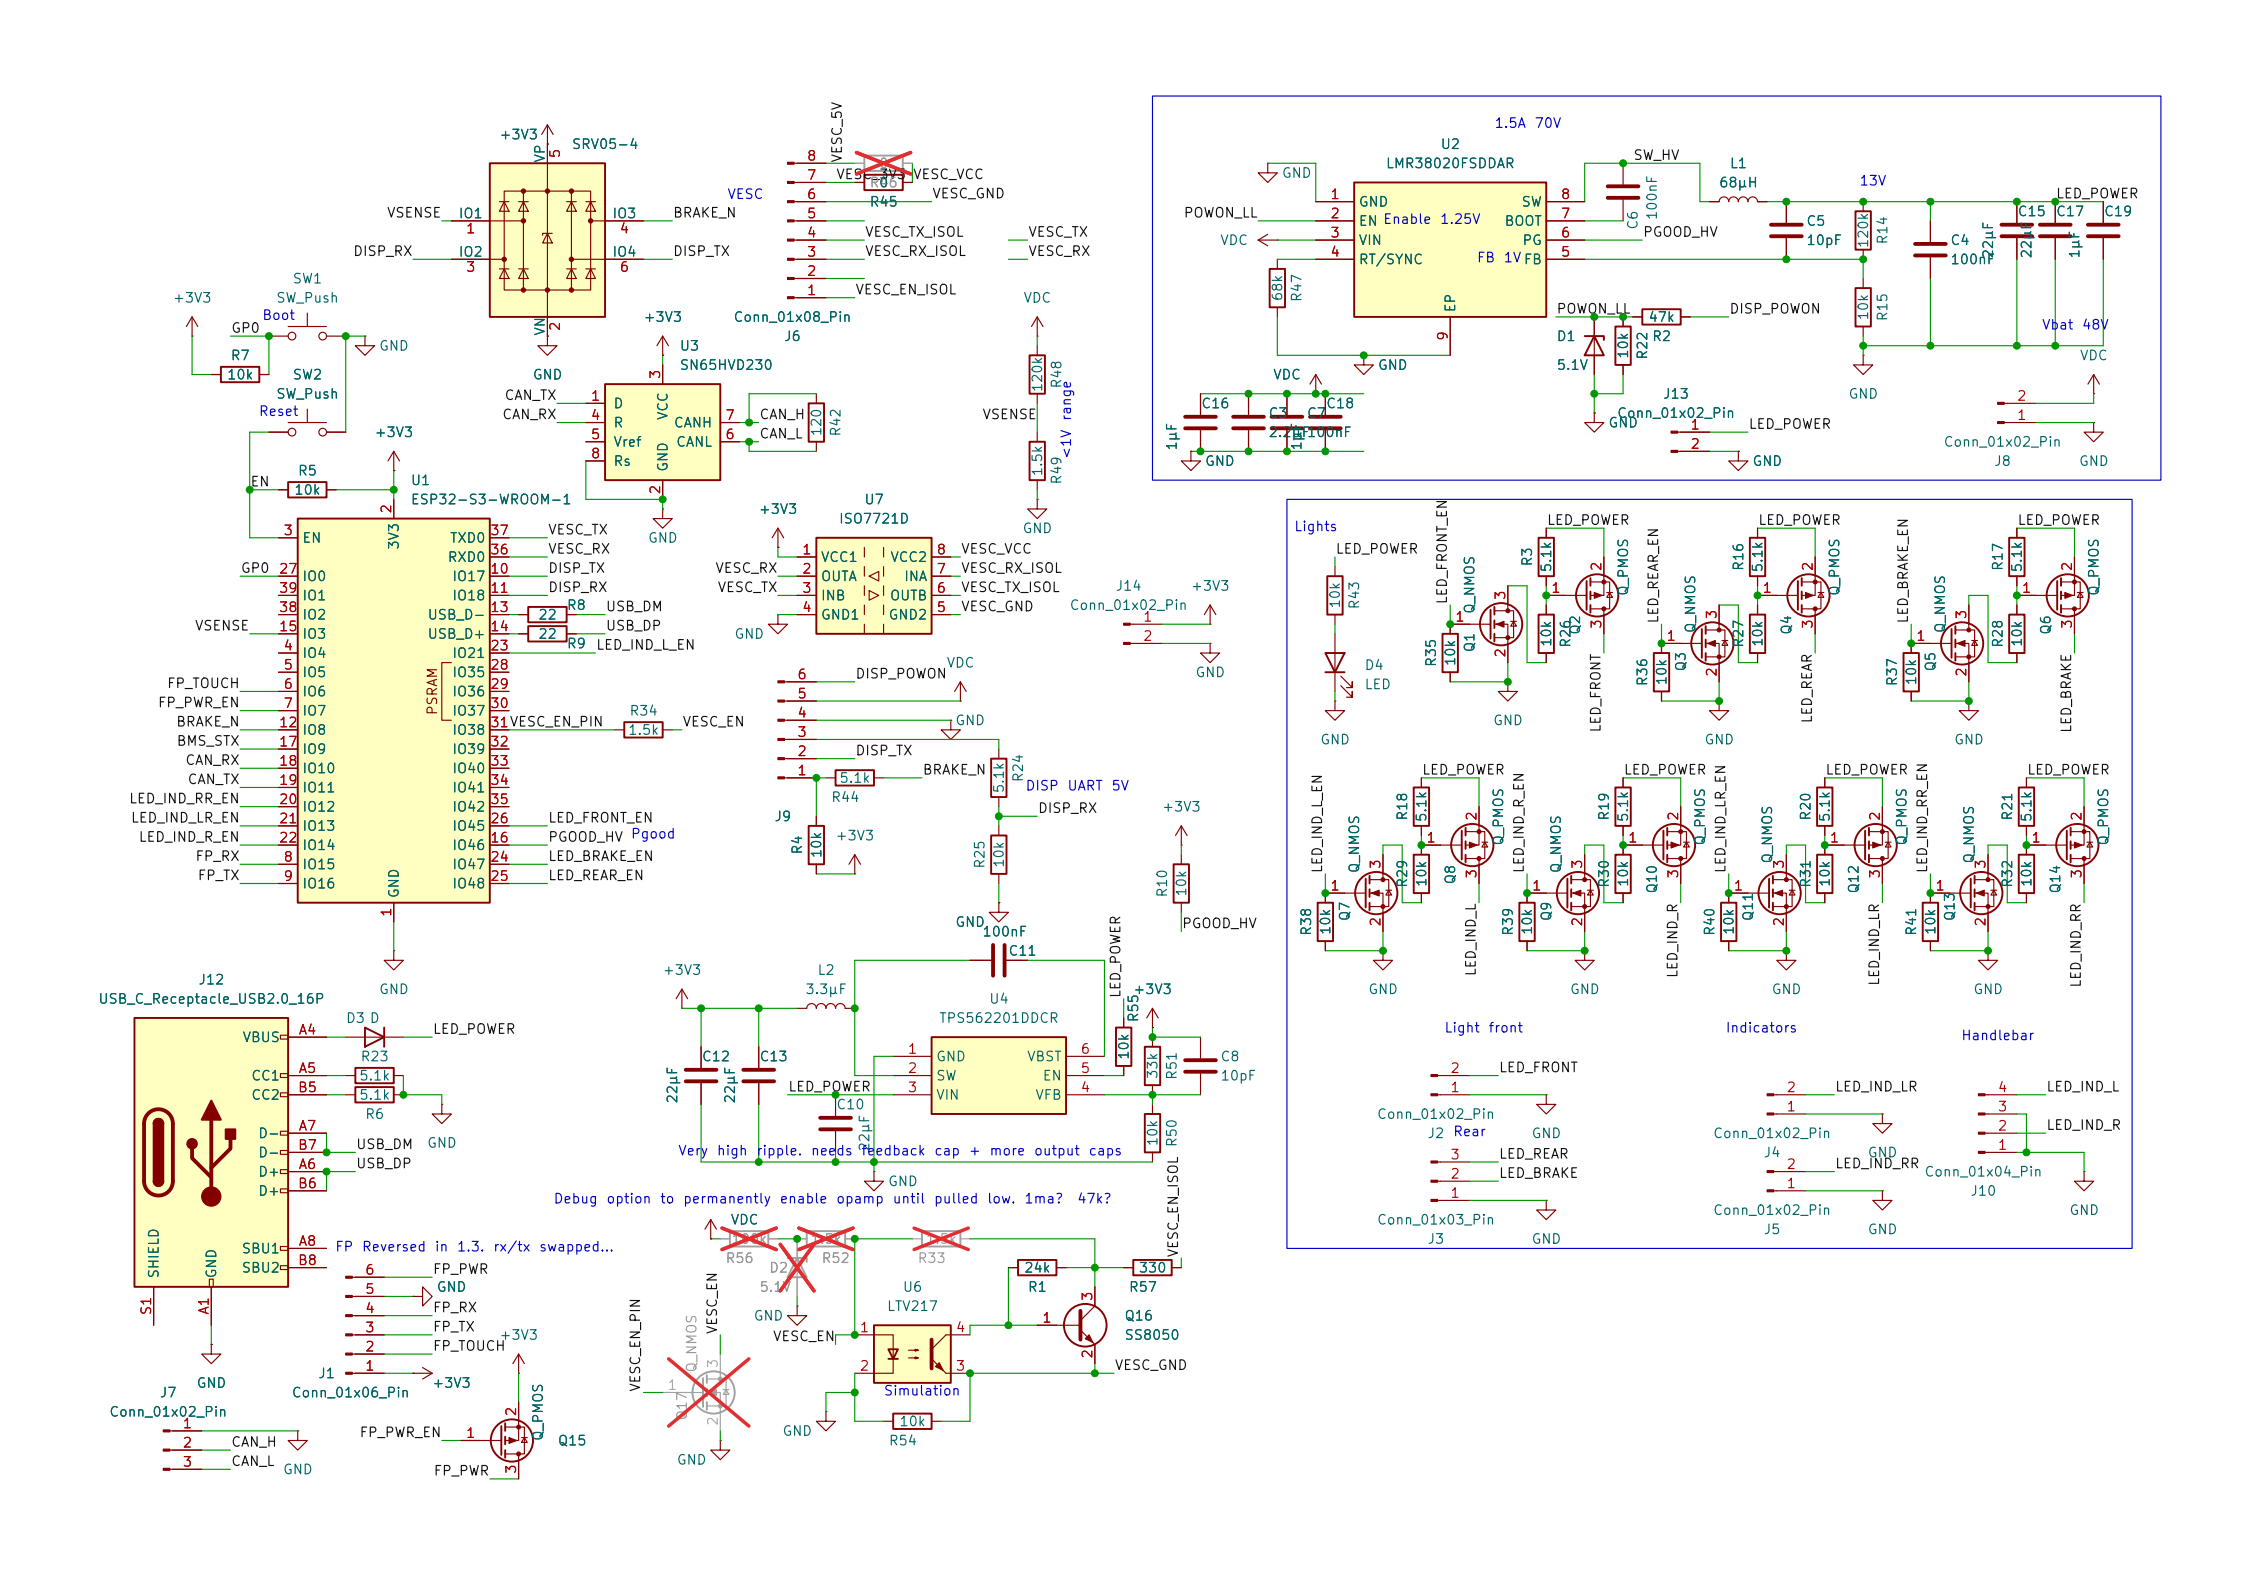

SRV05-4
VESC
Conn_01x08_Pin
J6
U3
SN65HVD230
U1
ESP32-S3-WROOM-1
U7
ISO7721D
J14
Conn_01x02_Pin
SW1
SW_Push
Boot
SW2
SW_Push
Reset
R7
10k
R5
10k
R8
22
R9
22
USB_DM
USB_DP
LED_IND_L_EN
VESC_EN_PIN
R34
1.5k
VESC_EN
FP_TOUCH
FP_PWR_EN
BRAKE_N
BMS_STX
CAN_RX
CAN_TX
LED_IND_RR_EN
LED_IND_LR_EN
LED_IND_R_EN
FP_RX
FP_TX
LED_FRONT_EN
PGOOD_HV
Pgood
LED_BRAKE_EN
LED_REAR_EN
PSRAM
VESC_TX
VESC_RX
DISP_TX
DISP_RX
VESC_VCC
VESC_GND
VESC_TX_ISOL
VESC_RX_ISOL
VESC_EN_ISOL
VESC_RX_ISOL
VESC_TX_ISOL
VESC_GND
CAN_H
CAN_L
R42
120
R48
120k
R49
1.5k
<1V range
VSENSE
DISP_POWON
DISP UART 5V
R44
5.1k
R24
5.1k
R4
10k
R25
10k
R10
10k
PGOOD_HV
J12
USB_C_Receptacle_USB2.0_16P
D3 D
LED_POWER
R23
5.1k
R6
5.1k
USB_DM
USB_DP
SHIELD
FP Reversed in 1.3. rx/tx swapped...
FP_PWR
FP_RX
FP_TX
FP_TOUCH
J1
Conn_01x06_Pin
J7
Conn_01x02_Pin
CAN_H
CAN_L
FP_PWR_EN
FP_PWR
Q15
Q_PMOS
L2
3.3µF
U4
TPS562201DDCR
C11
100nF
C12
22µF
C13
22µF
C10
22µF
R55
10k
R51
33k
C8
10pF
R50
10k
Very high ripple. needs feedback cap + more output caps
Debug option to permanently enable opamp until pulled low. 1ma? 47k?
R56
R52
R33
D2
5.1V
U6
LTV217
Simulation
R1
24k
R57
330
Q16
SS8050
VESC_EN
VESC_EN_ISOL
VESC_GND
R54
10k
1.5A 70V
U2
LMR38020FSDDAR
SW_HV
L1
68µH
13V
LED_POWER
C6
100nF
C5
10pF
C4
100nF
C15
22µF
C17
1µF
C19
Vbat 48V
PGOOD_HV
POWON_LL
47k
DISP_POWON
D1
5.1V
R22
10k
R2
J13
Conn_01x02_Pin
LED_POWER
C16
1µF
C3
2.2µF
C7
1µF
C18
100nF
Conn_01x02_Pin
J8
Lights
LED_POWER
D4
LED
LED_FRONT_EN
LED_REAR_EN
LED_BRAKE_EN
LED_IND_L_EN
LED_IND_R_EN
LED_IND_LR_EN
LED_IND_RR_EN
Q_NMOS
Q_PMOS
LED_FRONT
LED_REAR
LED_BRAKE
LED_IND_L
LED_IND_R
LED_IND_LR
LED_IND_RR
Light front
Indicators
Handlebar
J2 Rear
Conn_01x02_Pin
Conn_01x03_Pin
J3
J4
J5
J10
Conn_01x04_Pin