


USB-C

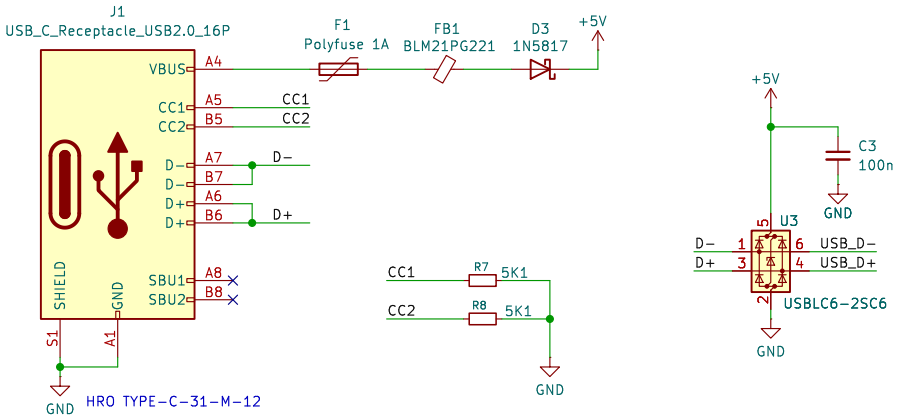


LDO

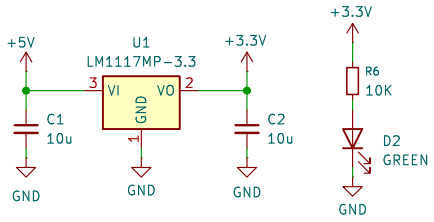


USER BUTTON




RGB LED




I/O




QWIIC



T+RH SENSOR

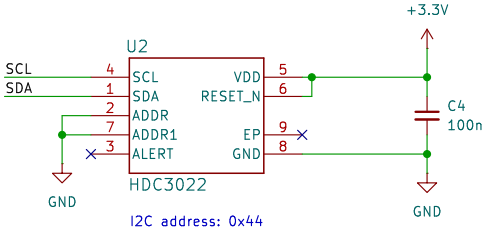

ESP32-S3-MINI MODULE

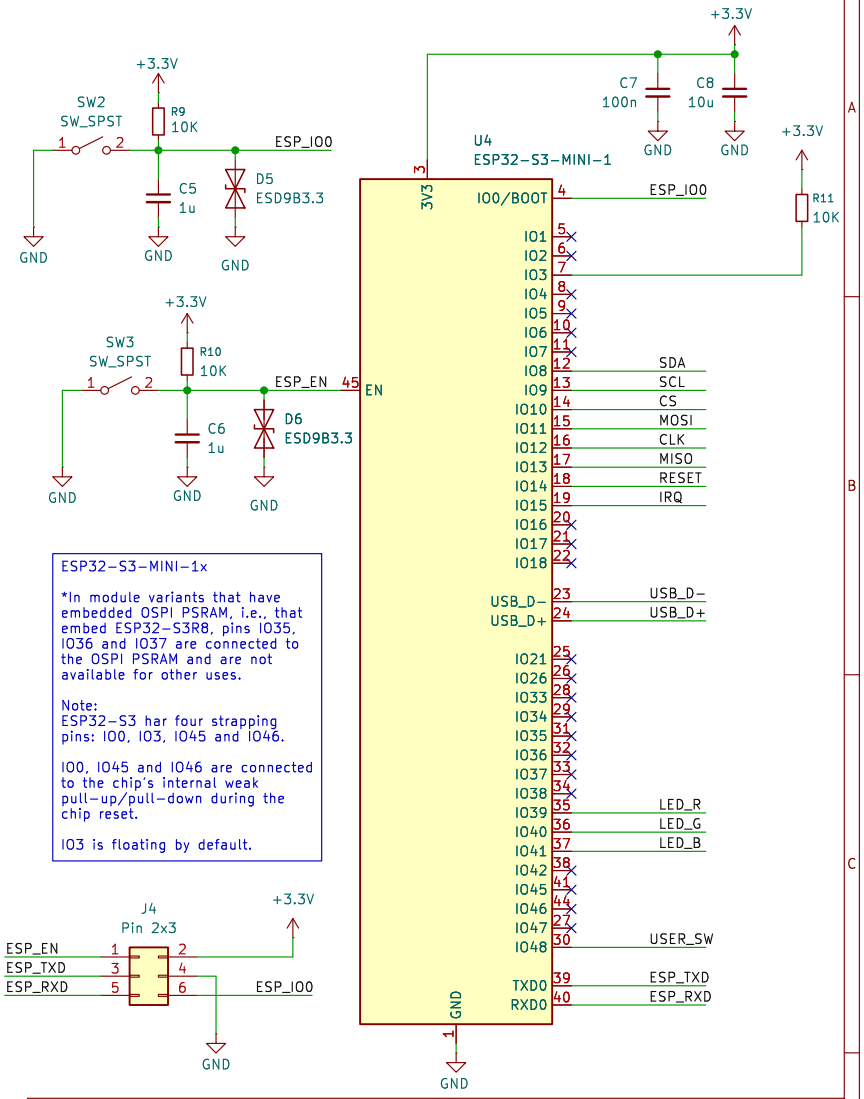

ESP32-S3-MINI-1x

*In module variants that have embedded OSPI PSRAM, i.e., that embed ESP32-S3R8, pins IO35, IO36 and IO37 are connected to the OSPI PSRAM and are not available for other uses.

Note:
ESP32-S3 har four strapping pins: IO0, IO3, IO45 and IO46.

IO0, IO45 and IO46 are connected to the chip's internal weak pull-up/pull-down during the chip reset.

IO3 is floating by default.

H1 Mount
H2 Mount
H3 Mount
H4 Mount

Made by Umaid

Sheet: /
File: ESP32-S3-MINI.kicad_sch

Title: ESP32-S3-MINI TestBoard

Size: A4	Date: 2026-11-09	**Rev: 1.0**
KiCad E.D.A. 9.0.6		Id: 1/1