



MECH TORQUE
Manufacturing Gearbox —

GEARBOXES THAT DRIVE
VALVE EXCELLENCE

ABOUT US:

At Mech Torque, we specialize in crafting high-precision gearboxes engineered for industrial valve applications. Driven by a commitment to excellence and innovation, we deliver cutting-edge solutions that cater to the diverse requirements of our customers.

WHAT WE OFFER:

Our comprehensive range of gearboxes is designed to enhance the performance and reliability of industrial valves. Precision-engineered for smooth operation and durability, our solutions excel in even the most demanding environments. From standard and high-torque options to compact designs, Mech Torque provides quality gearboxes tailored to optimize valve systems.

WHO WE ARE:


Recognized for our expertise in precision engineering and superior craftsmanship, Mech Torque is a trusted name across industries such as manufacturing, oil and gas, and petrochemicals. Customers rely on our gearbox solutions to boost the efficiency, reliability, and longevity of their valve systems.



MATERIAL & STANDARDS SPECIFICATION

Our gearboxes are crafted from high-grade materials like cast iron, ductile iron, and carbon steel, ensuring durability, reliability, and superior performance in industrial valve applications.

NO.	Description	Material	US Standard	IS Standard
01	Housing	Cast Iron	ASTM A48-83 30A	IS 210 FG 200
02	Top Cover	Cast Iron	ASTM A48-83 30A	IS 210 FG 200
03	Worm Wheel	Ductile Iron	ASTM A70-50-05	SGI 500/7
04	Input Shaft	Carbon Steel	A576-1045	45C8
05	Worm	Carbon Steel	A576-1045	45C8
06	Spur Housing	Cast Iron	ASTM A48-8 30A	IS 210 FG 200
07	Spur Cover	Cast Iron	ASTM A48-83 30A	IS 210 FG 200
08	Spur Pinion	Carbon Steel	A322-4140	40CrMo3
09	Spur Gear	Ductile Iron	ASTM A70-50-05	SGI 500/7
10	Thrust Bearing	Special Steel	ASTM A295 52100	

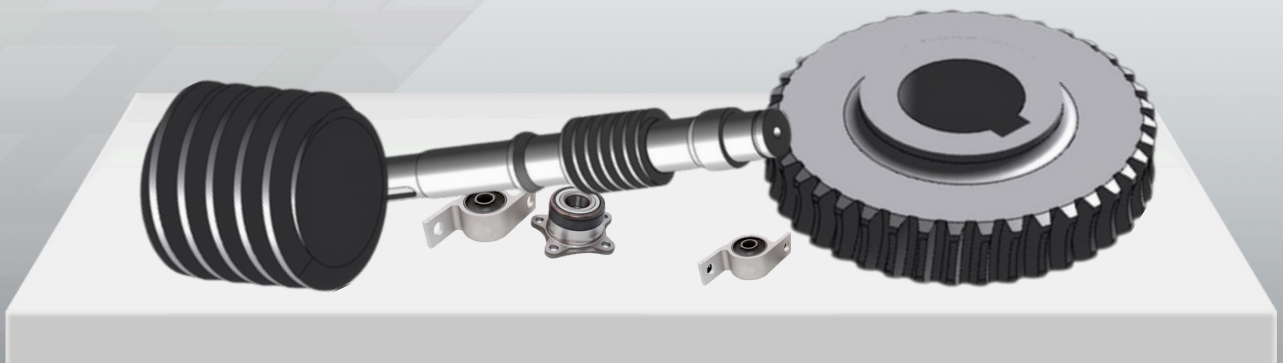


MODEL SPECIFICATION

Valve gearbox model specifications designed for seamless operation of butterfly valves.

MODEL	TORQUE (N.M)	P.C.D.	MAX DRIVE BORE SIZE	HANDLE DIAMETER
MT - 20	250	F05, F07	20	150
MT - 25	500	F07, F10	30	250
MT - 30	700	F07, F10, F12	32	350
MT - 40	1000	F10, F12, F14	45	350
MT - 50	1500	F10, F12, F14, F16	50	500
MT - 60	2000	F10, F12, F14, F16	50	500



SPECS & MECHANISM

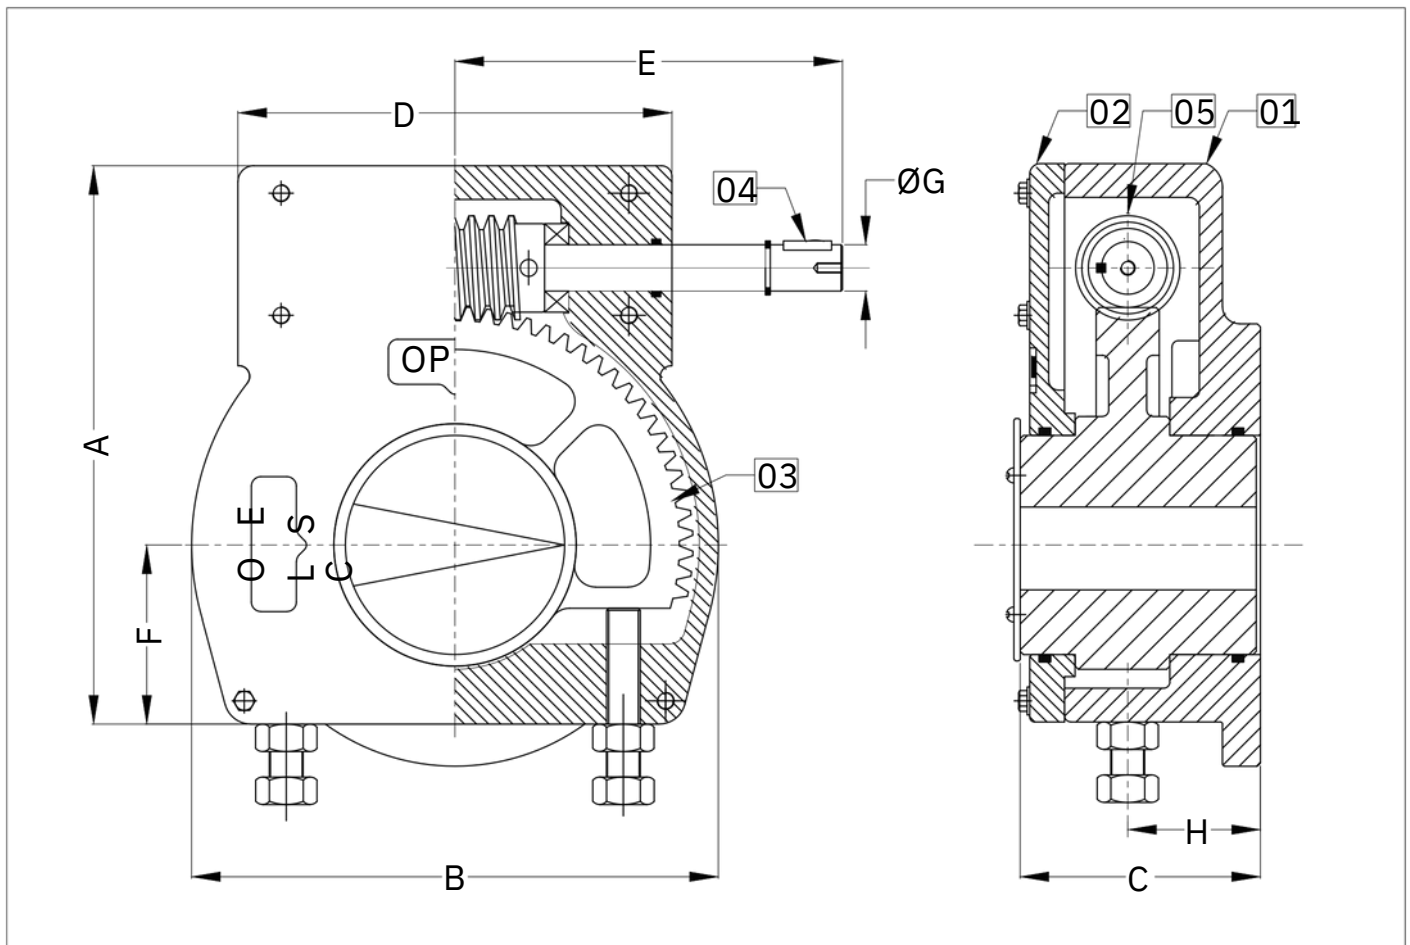

Model	Torque (Nm)	ISO Mounting	Max Drive Bore (mm)	Handwheel (mm)	A	B	C	D	E	F	G	H
MT 20	250	F05, F07	20	Ø 160	111	91	52.5	79	202	36	12	22
MT 25	500	F07, F10	30	Ø 250	135	108	62	98	218	54	14	35
MT 30	700	F07, F10, F12	32	Ø 350	142	128	74	98	218	58	20	39
MT 40	1000	F10, F12, F14	45	Ø 350	176	140	86	116	218	70	20	47
MT 50	1500	F10, F12, F14, F16	55	Ø 500	198	168	86	137	226	81	20	48
MT 60	2000	F10, F12, F14, F16	55	Ø 500	215	176	86	156	242	83	20	48



CONTACT:

+91 99131 91343

ADDRESS:

PLOT NO. 10, SHED NO. 1, NR. ATUL INDUSTRIES,
AKSHAR WEIGH BRIDGE STREET, KALAWAD
ROAD, VILLAGE : KHIRSARA, RAJKOT -360021

