

Material

Housing: LCP UL94V-0

Card button: LCP UL94V-0

Reed tab: Tin-bronze QSn6.5-0.1 GB2066-89

PACKAGE: Tape and Reel Package

Specification

Pitch: 2.54mm

Environmental temperature: -45°C~+85°C

Voltage rating: 100V AC


Current rating: 0.5A Max




Withstand voltage: 200V AC/1Minute

Insulation resistance: $\leq 1000M\Omega$

Contact resistance: $\geq 30m\Omega$


Life: <5000 Cycles

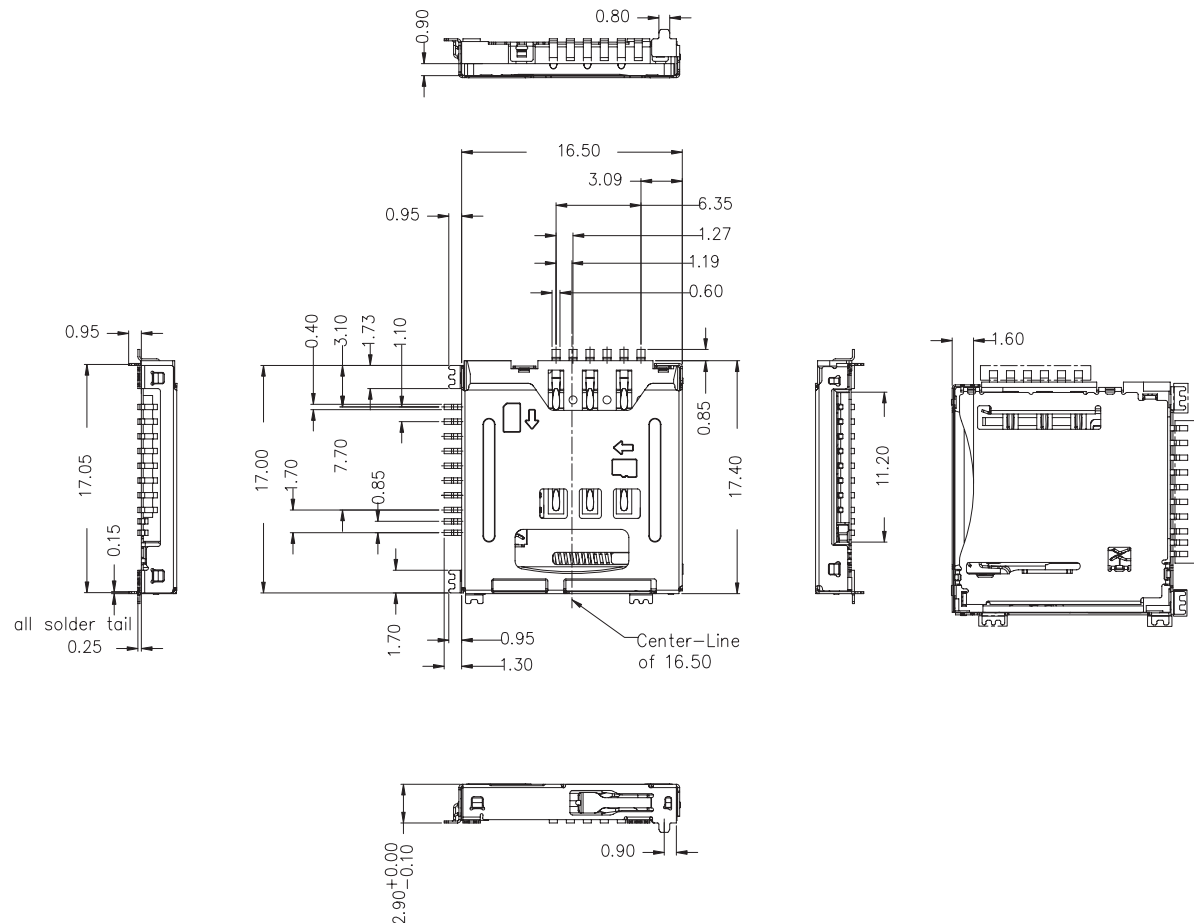

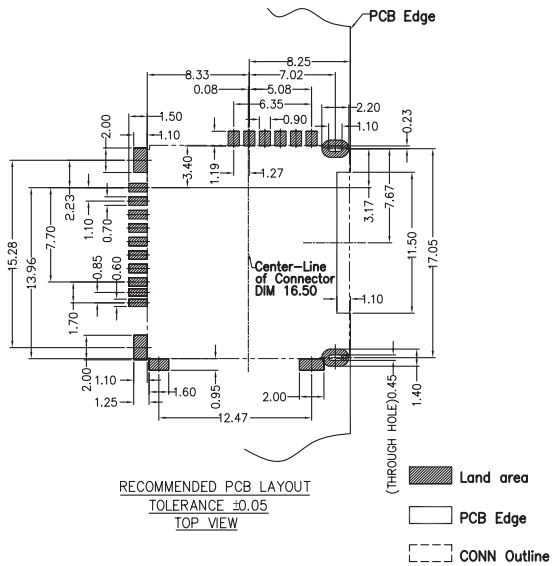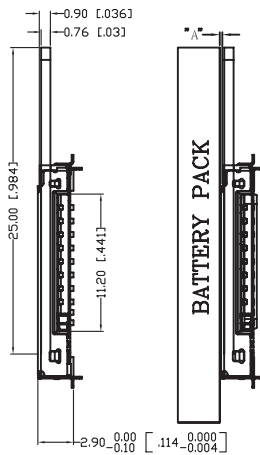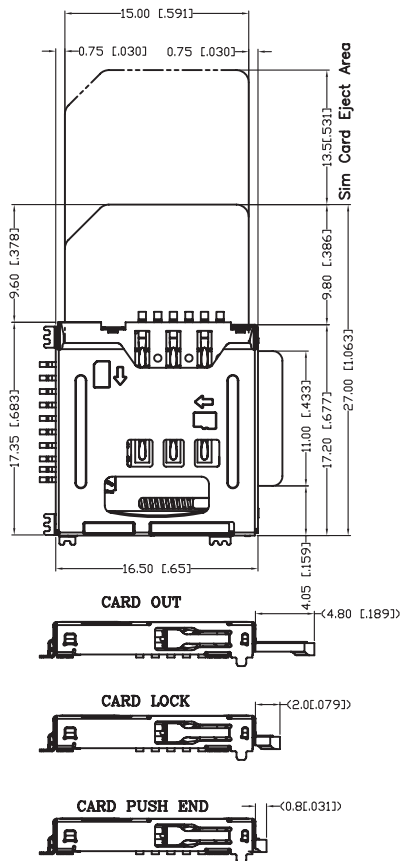

SIM CARD	
Pin No	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved


MICRO SD CARD				
Pin No.	NAME	TYPE	DESCRIPTION	
1	DAT2	I/O/PP	Date Line[bit2]	
2	CD/DAT3	I/O/PP	Card Detect Date Line[bit3]	
3	CMD	PP	Command Response	
4	VDD	S	Supply Voltage	
5	CLK	I	Clock	
6	VSS	S	Supply Voltage Ground	
7	DAT0	I/O/PP	Date Line[bit0]	
8	DAT1	I/O/PP	Date Line[bit1]	




NOTE:

1. SWITCH TYPE: CARD OUT- SWITCH OPEN
CARD IN- SWITCH CONTACT

2. SET DISTANCE "A" Min 0.20mm PACK GAP CONN



SIM COMMON DIMENSIONS			
SYMBOL	MIN	NOM	MAX
L	24.90	25.00	25.10
W	14.90	15.00	15.10
T	0.68	0.76	0.84



MICRO SD ASSOCIATION DIMENSION			
SYMBOL	MIN	NOM	MAX
A	10.90	11.00	11.10
A1	9.60	9.70	9.80
A2	0.50	0.60	0.70
B	14.90	15.00	15.10
B1	6.30	6.40	6.50
B2	7.80	7.90	8.00
B3	1.10	1.20	1.30
B4	0.42	0.52	0.62
B5	1.74	1.84	1.94
C	0.60	0.70	0.80
C1	0.00	-	0.15
C2	0.20	0.30	0.40
R1	0.20	0.40	0.60
R2	0.20	0.40	0.60
R3	0.70	0.80	0.90