


MASTER BATHROOM SWITCH DETAIL



18-MAR-24 23

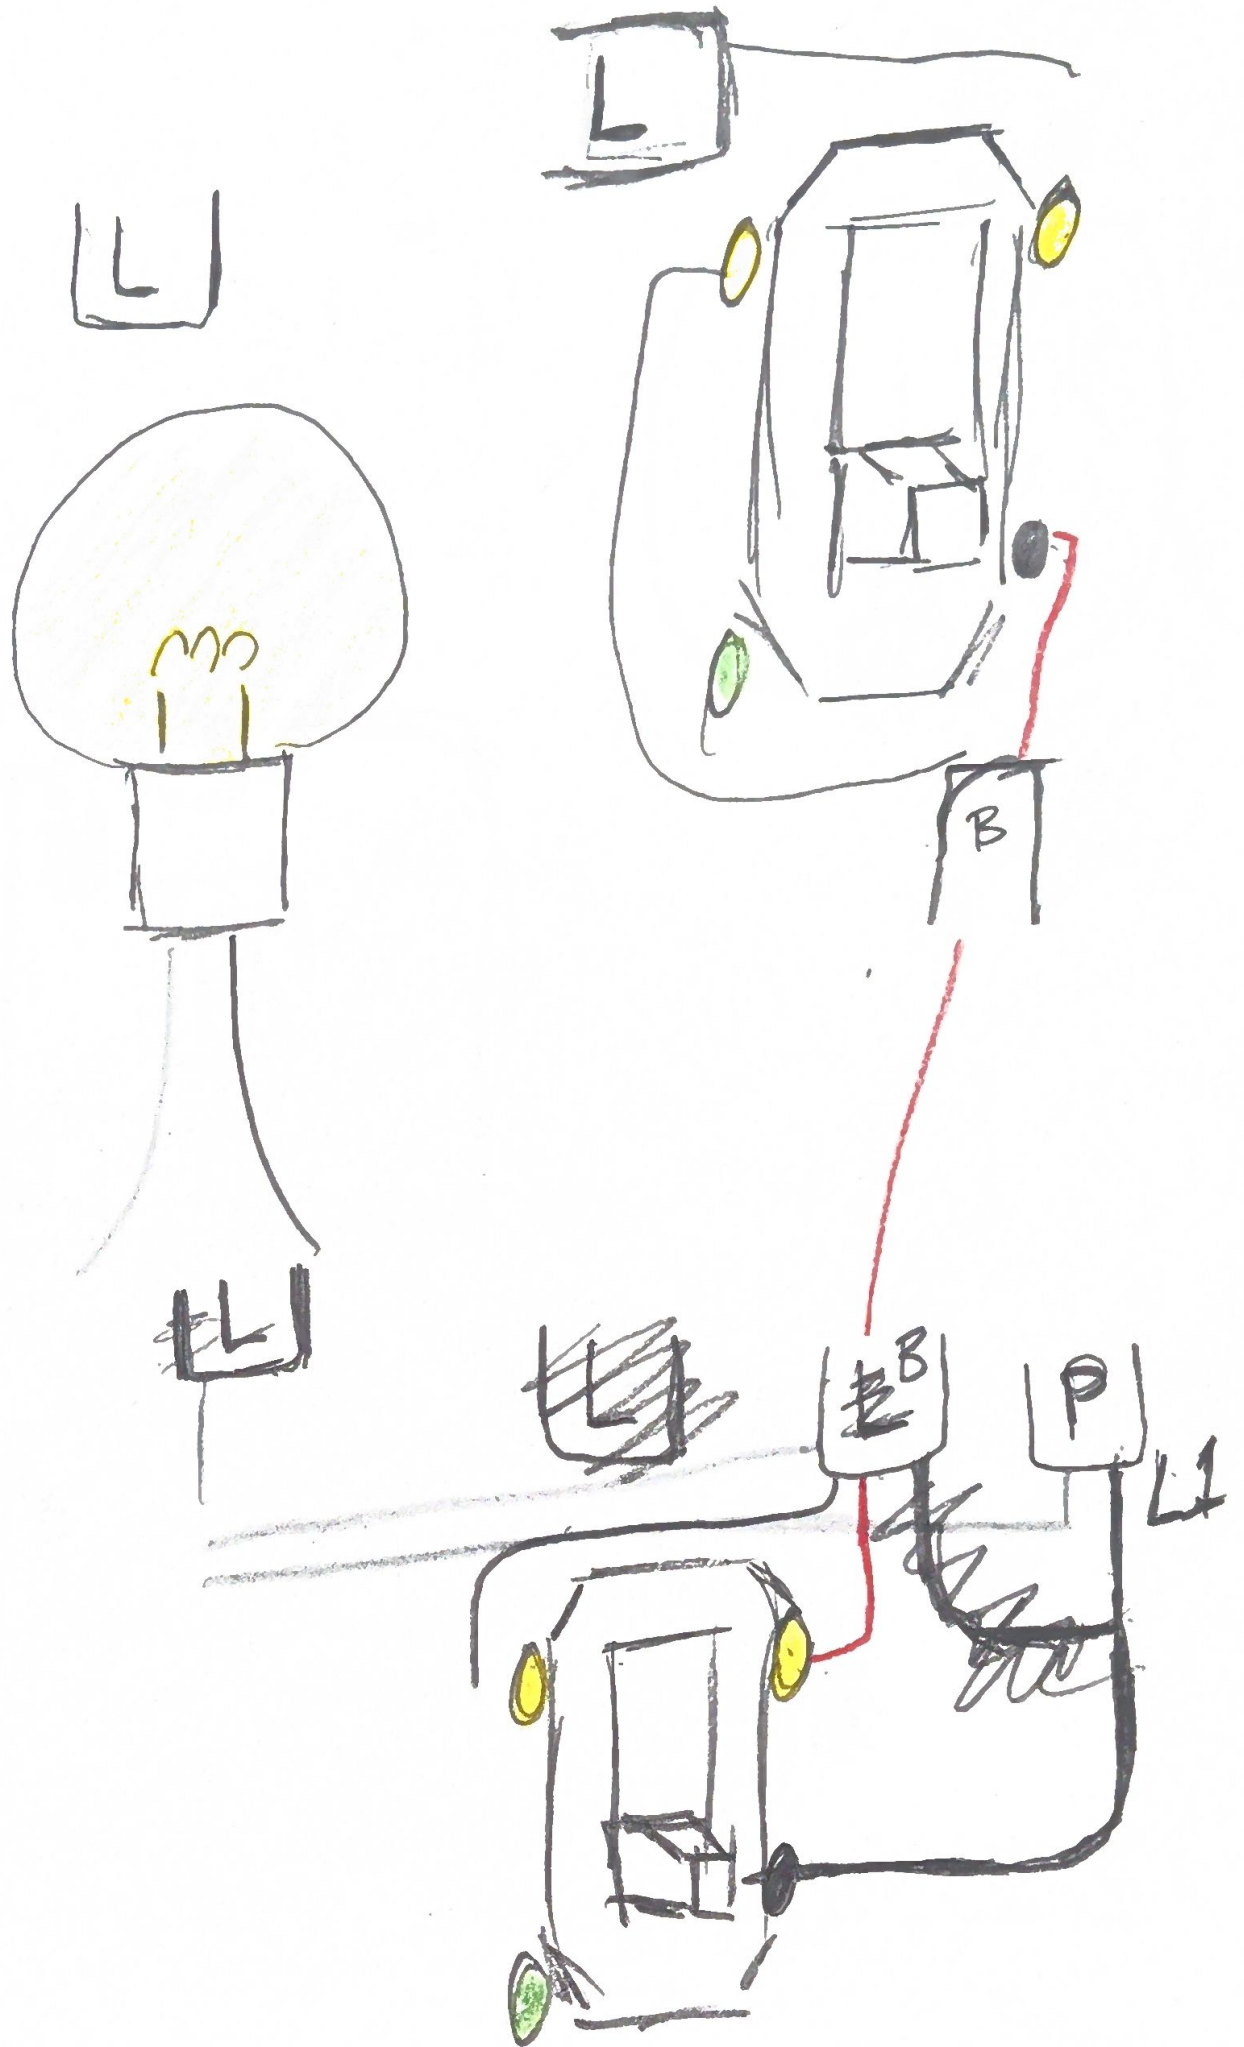


2+3+3

MASTER BATHROOM SWITCH DETAIL

18-MAR-2023

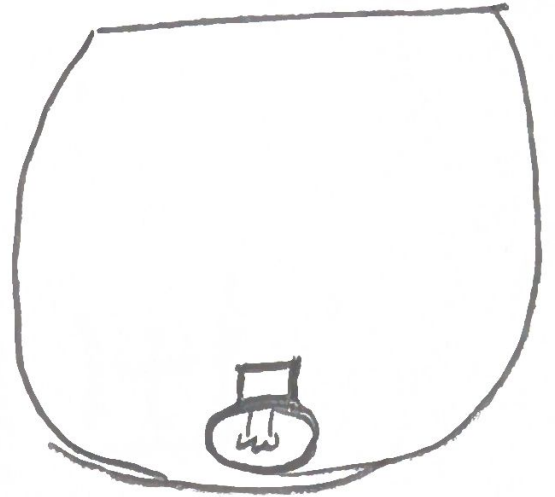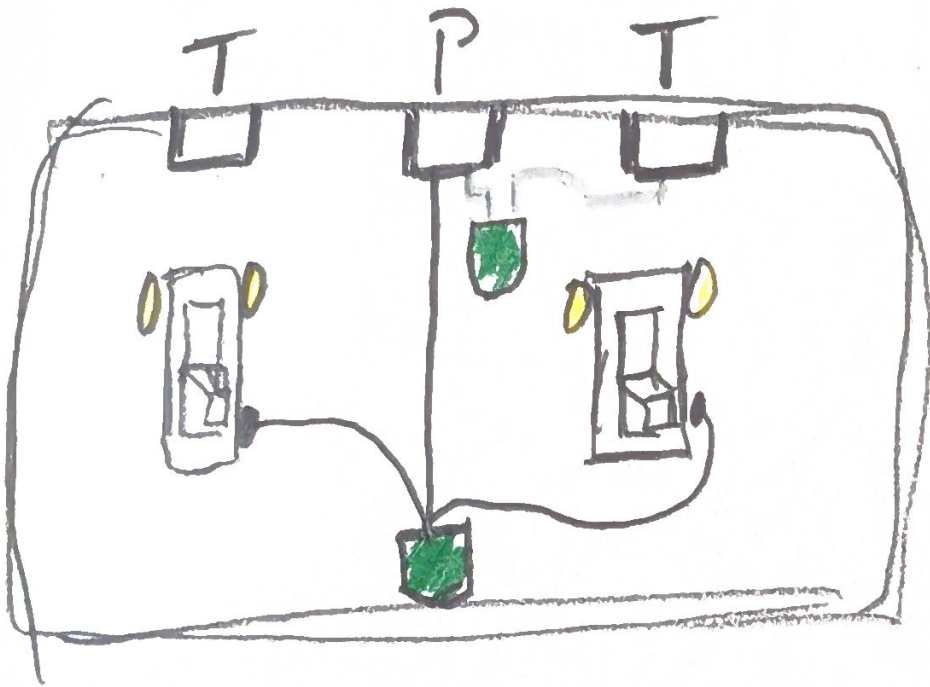




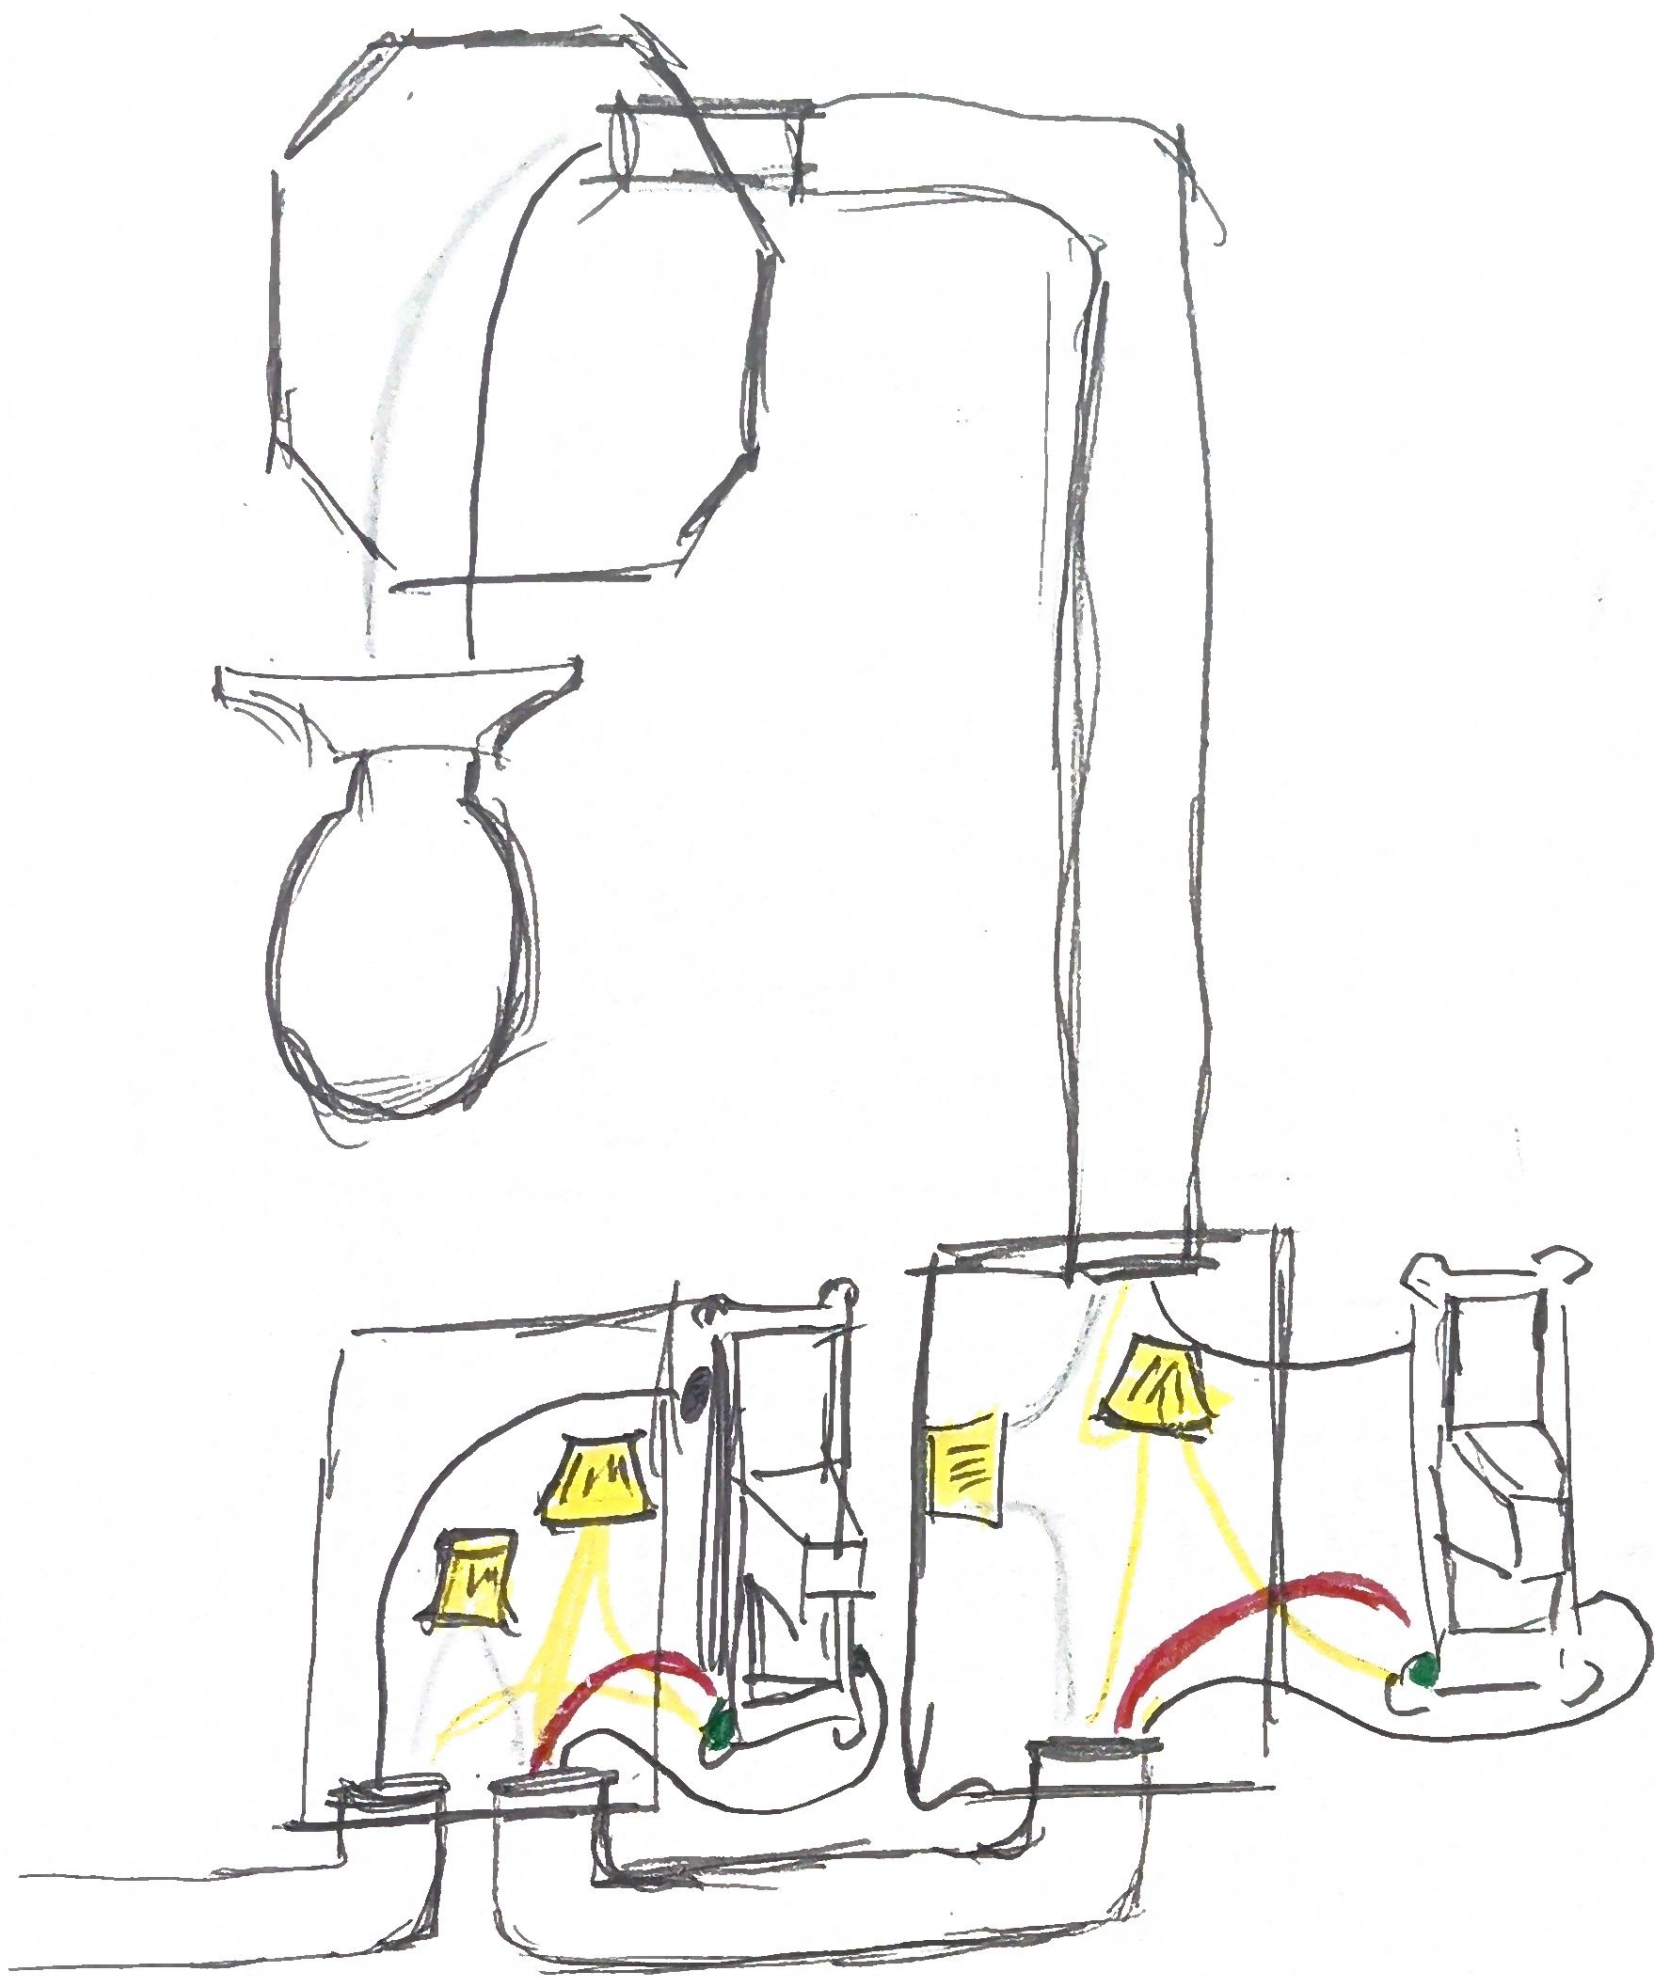


- SWITCH + Outlet - MB -

[15-APRIL-23]

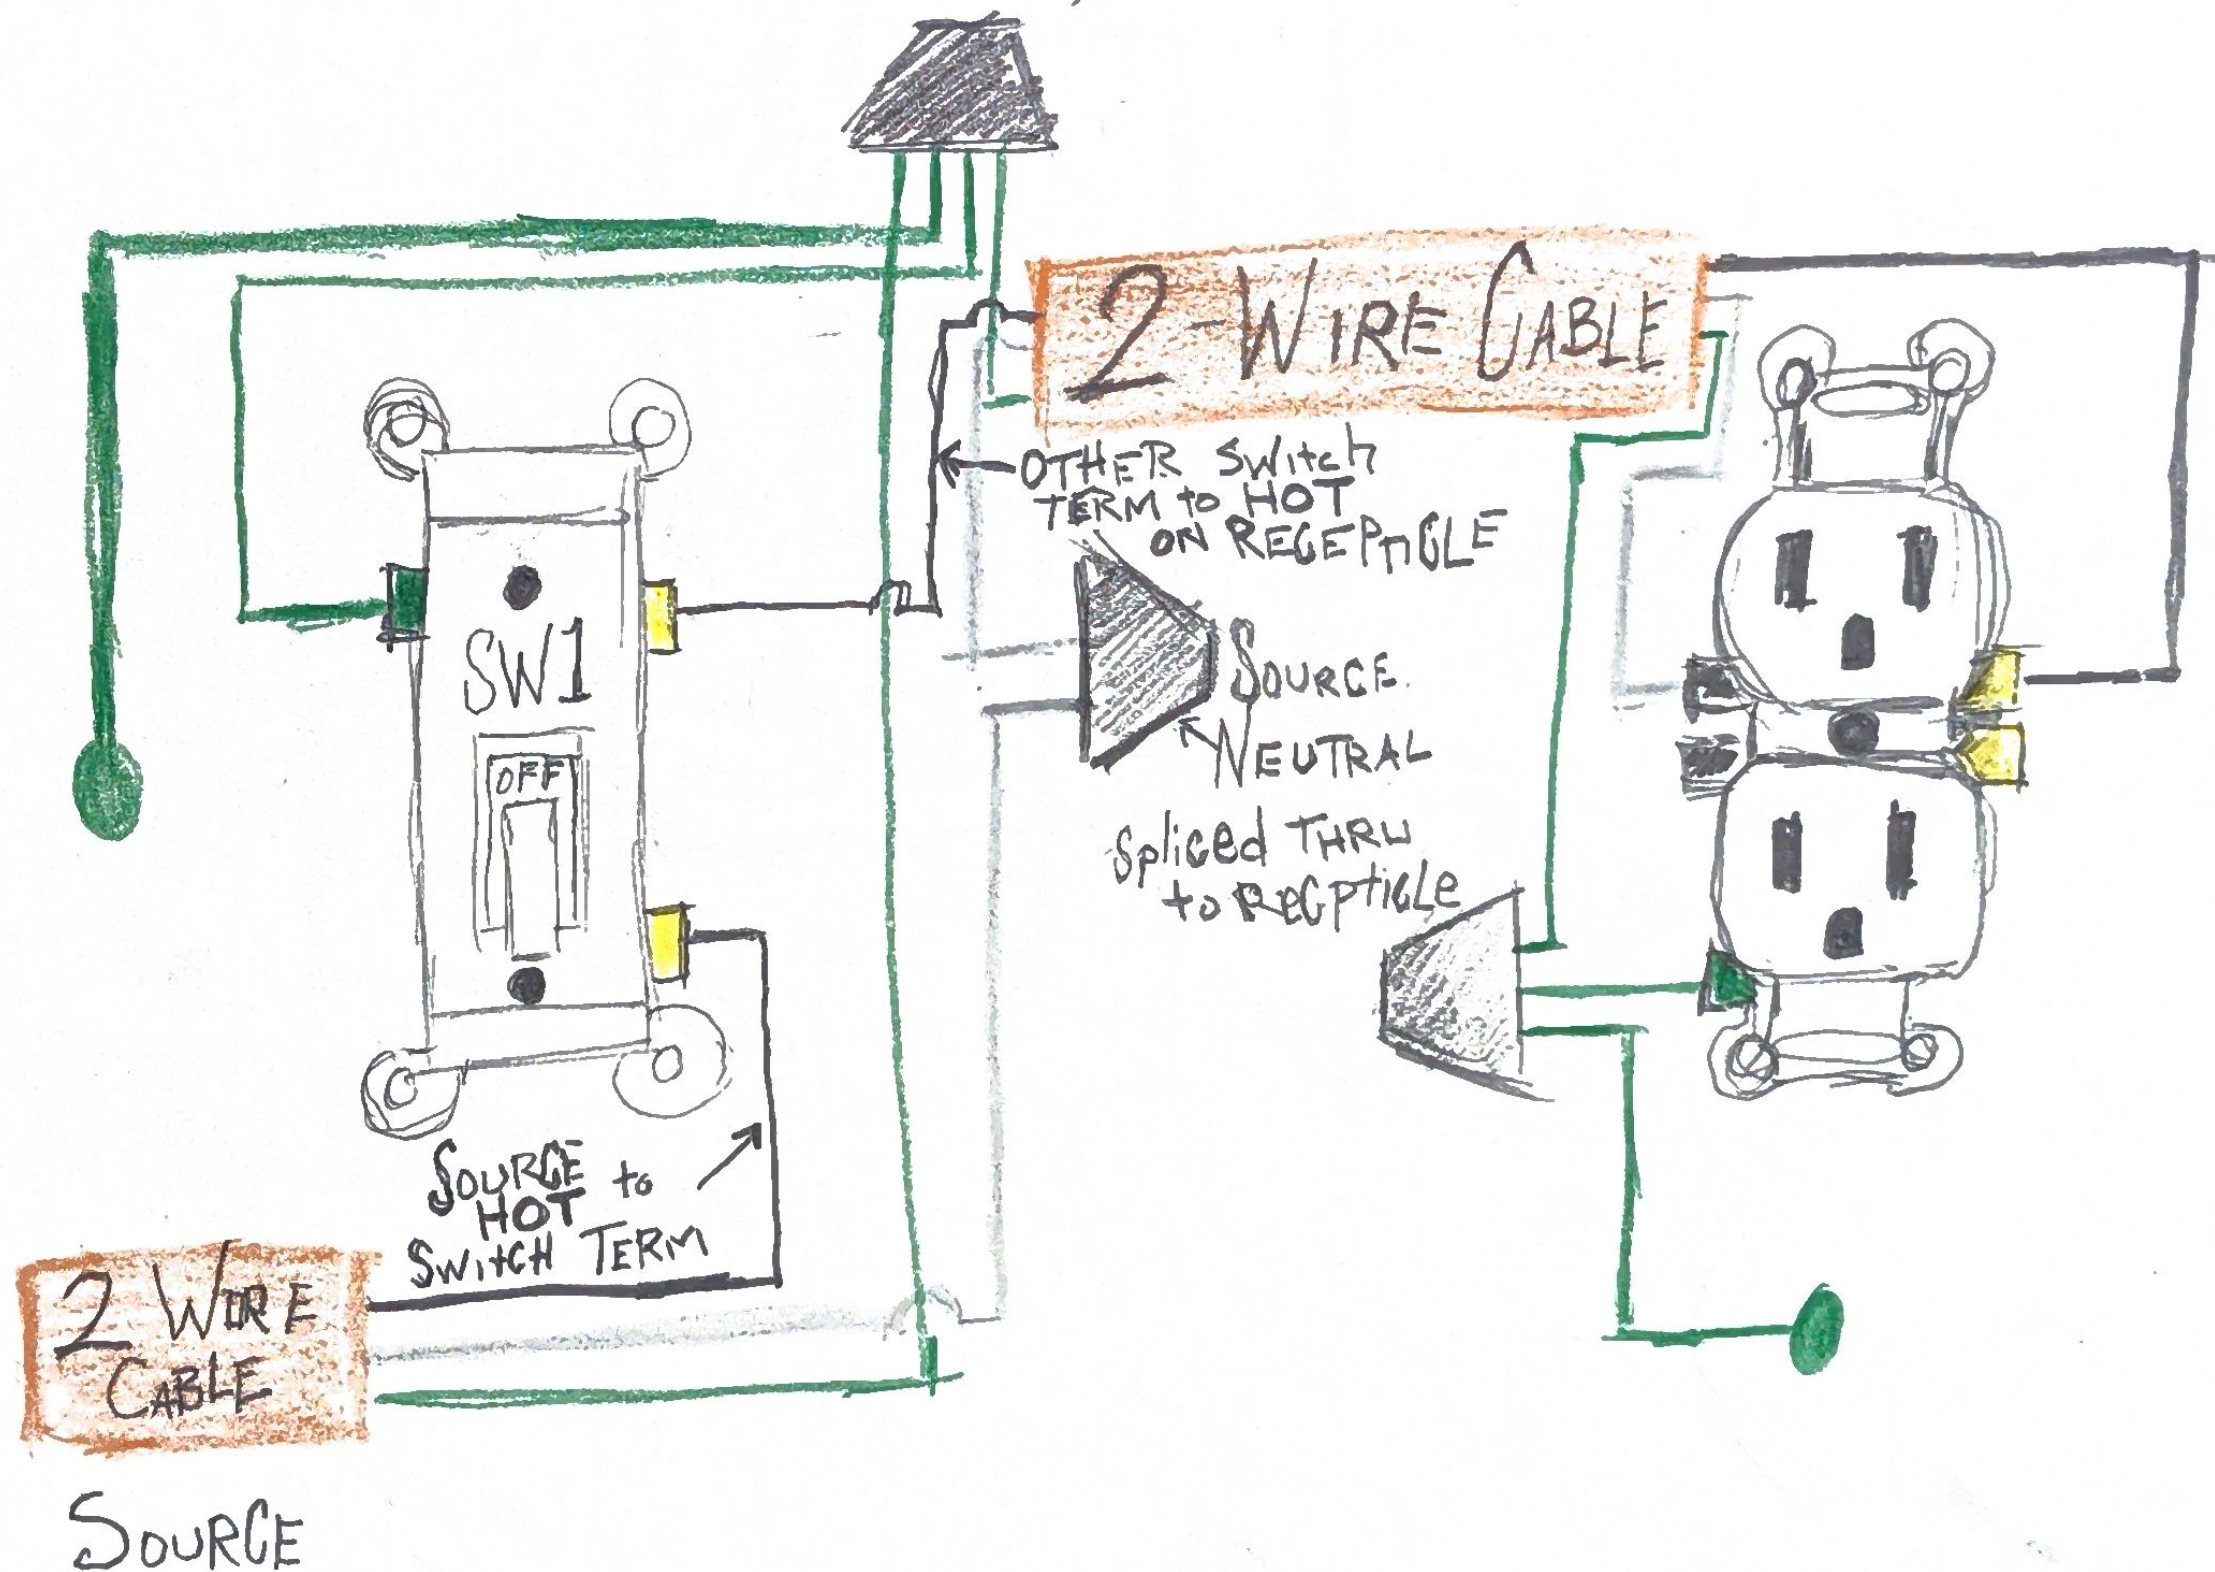


MB - SWITCH + Outlet - WIRING DIAG 15-APRIL-2023

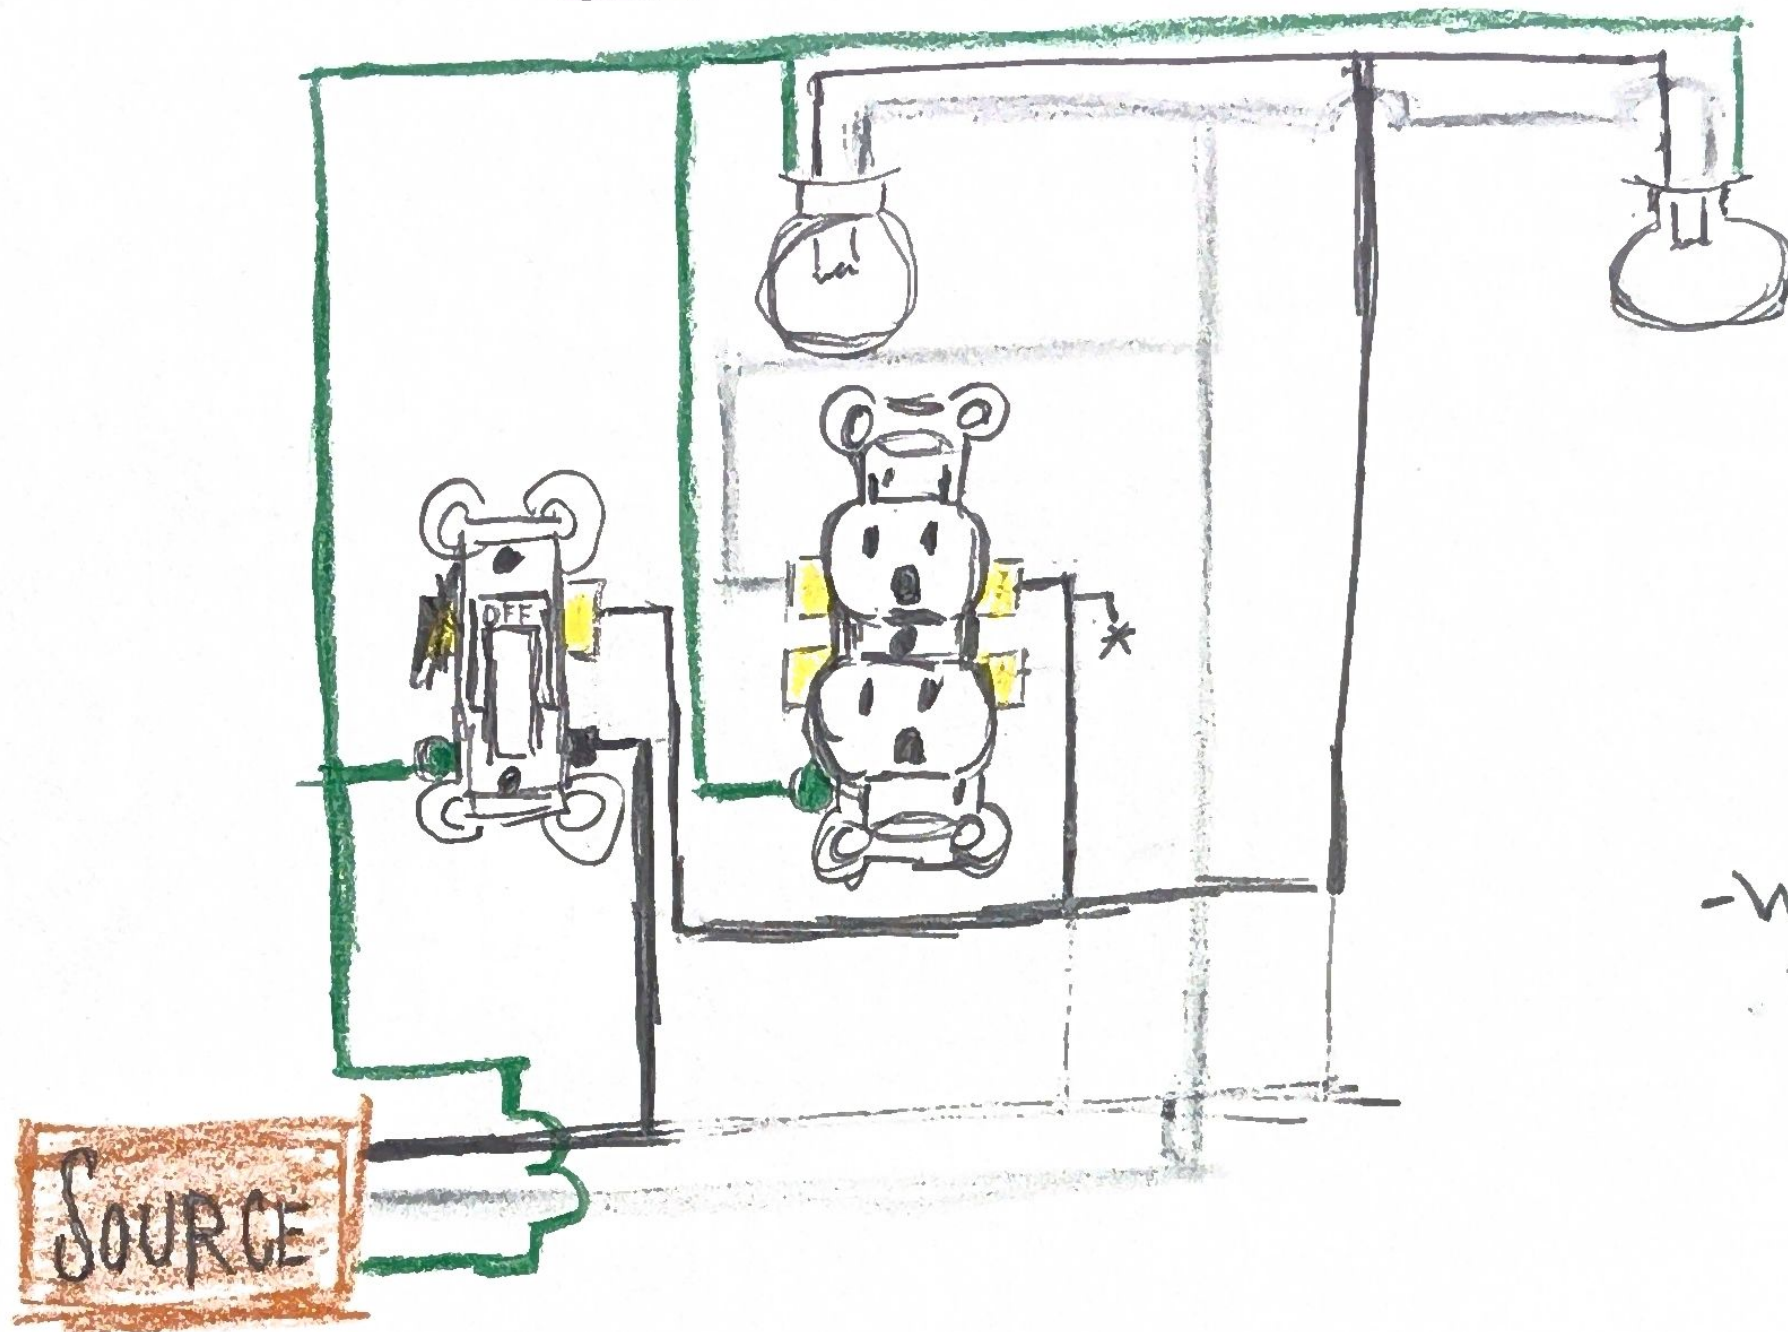



* KEY Conn to
MAKE OUTLET
ALWAYS HOT

- WIRE NUT -
- Power Source

MB-SWITCH 15-APR 23
 +
 OUTLET
 +
 2x LIGHT
 WIRING DIAG

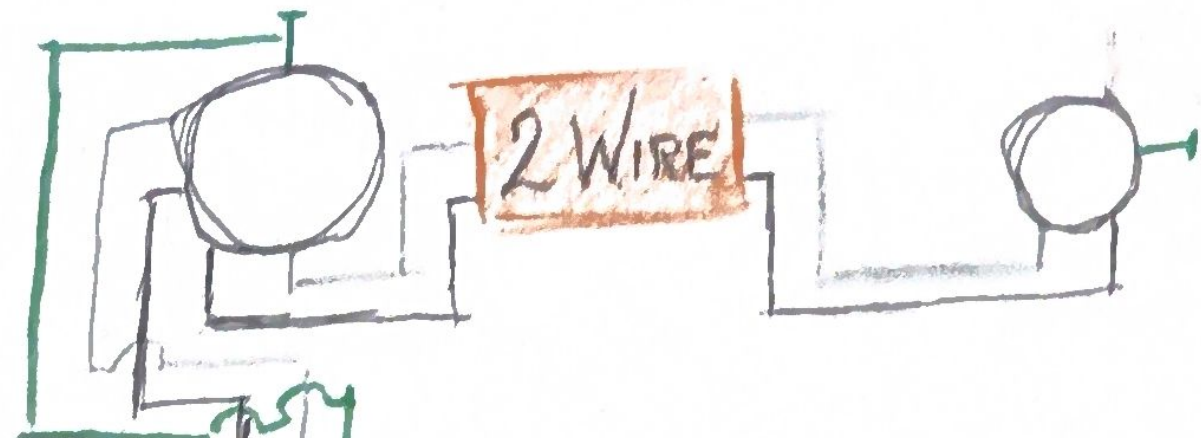


3 Pig tails
 - L1/R1R
 - TRAVELER
 - NEUTRAL

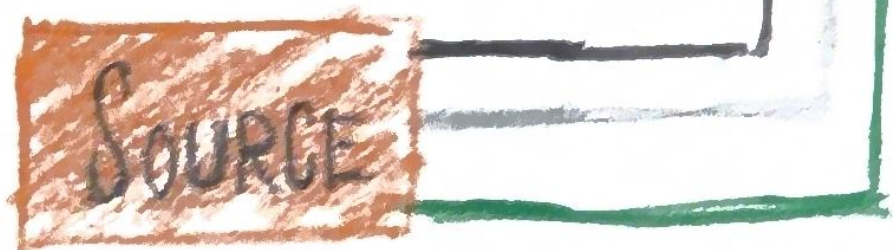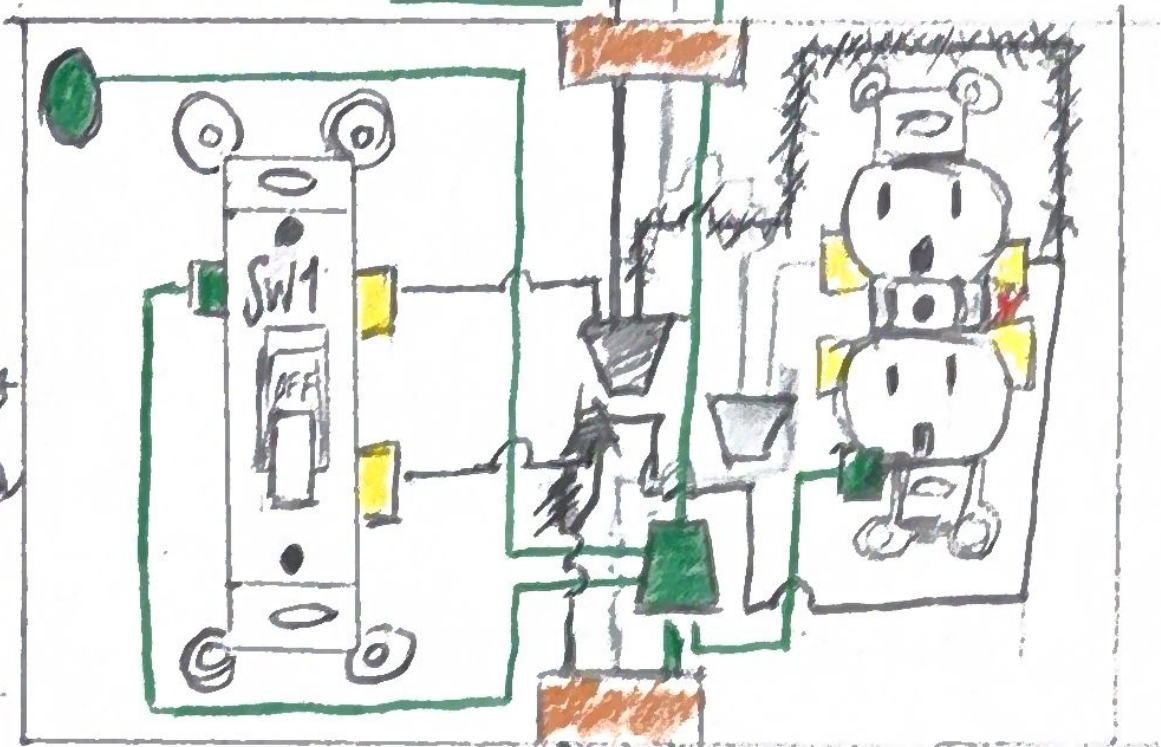


- * If this opt leaves the outlet dependant on the switch, remove brass plate
1. Remove brass plate
 2. Move BLACK common WIRE DOWN one outlet
 3. ADD 3RD WIRE where BLACK common WAS
 4. PigTAIL into L1 + BLACK common (LINE WIRE) on SWITCH


AKA 1/2 HOT

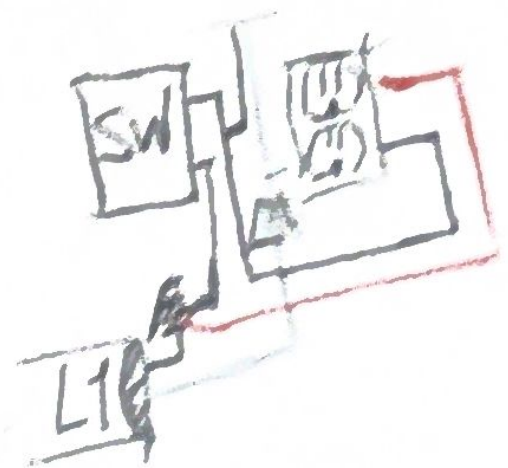


MASTER BEDROOM CIRCUIT DIAG

25-APRIL-2023

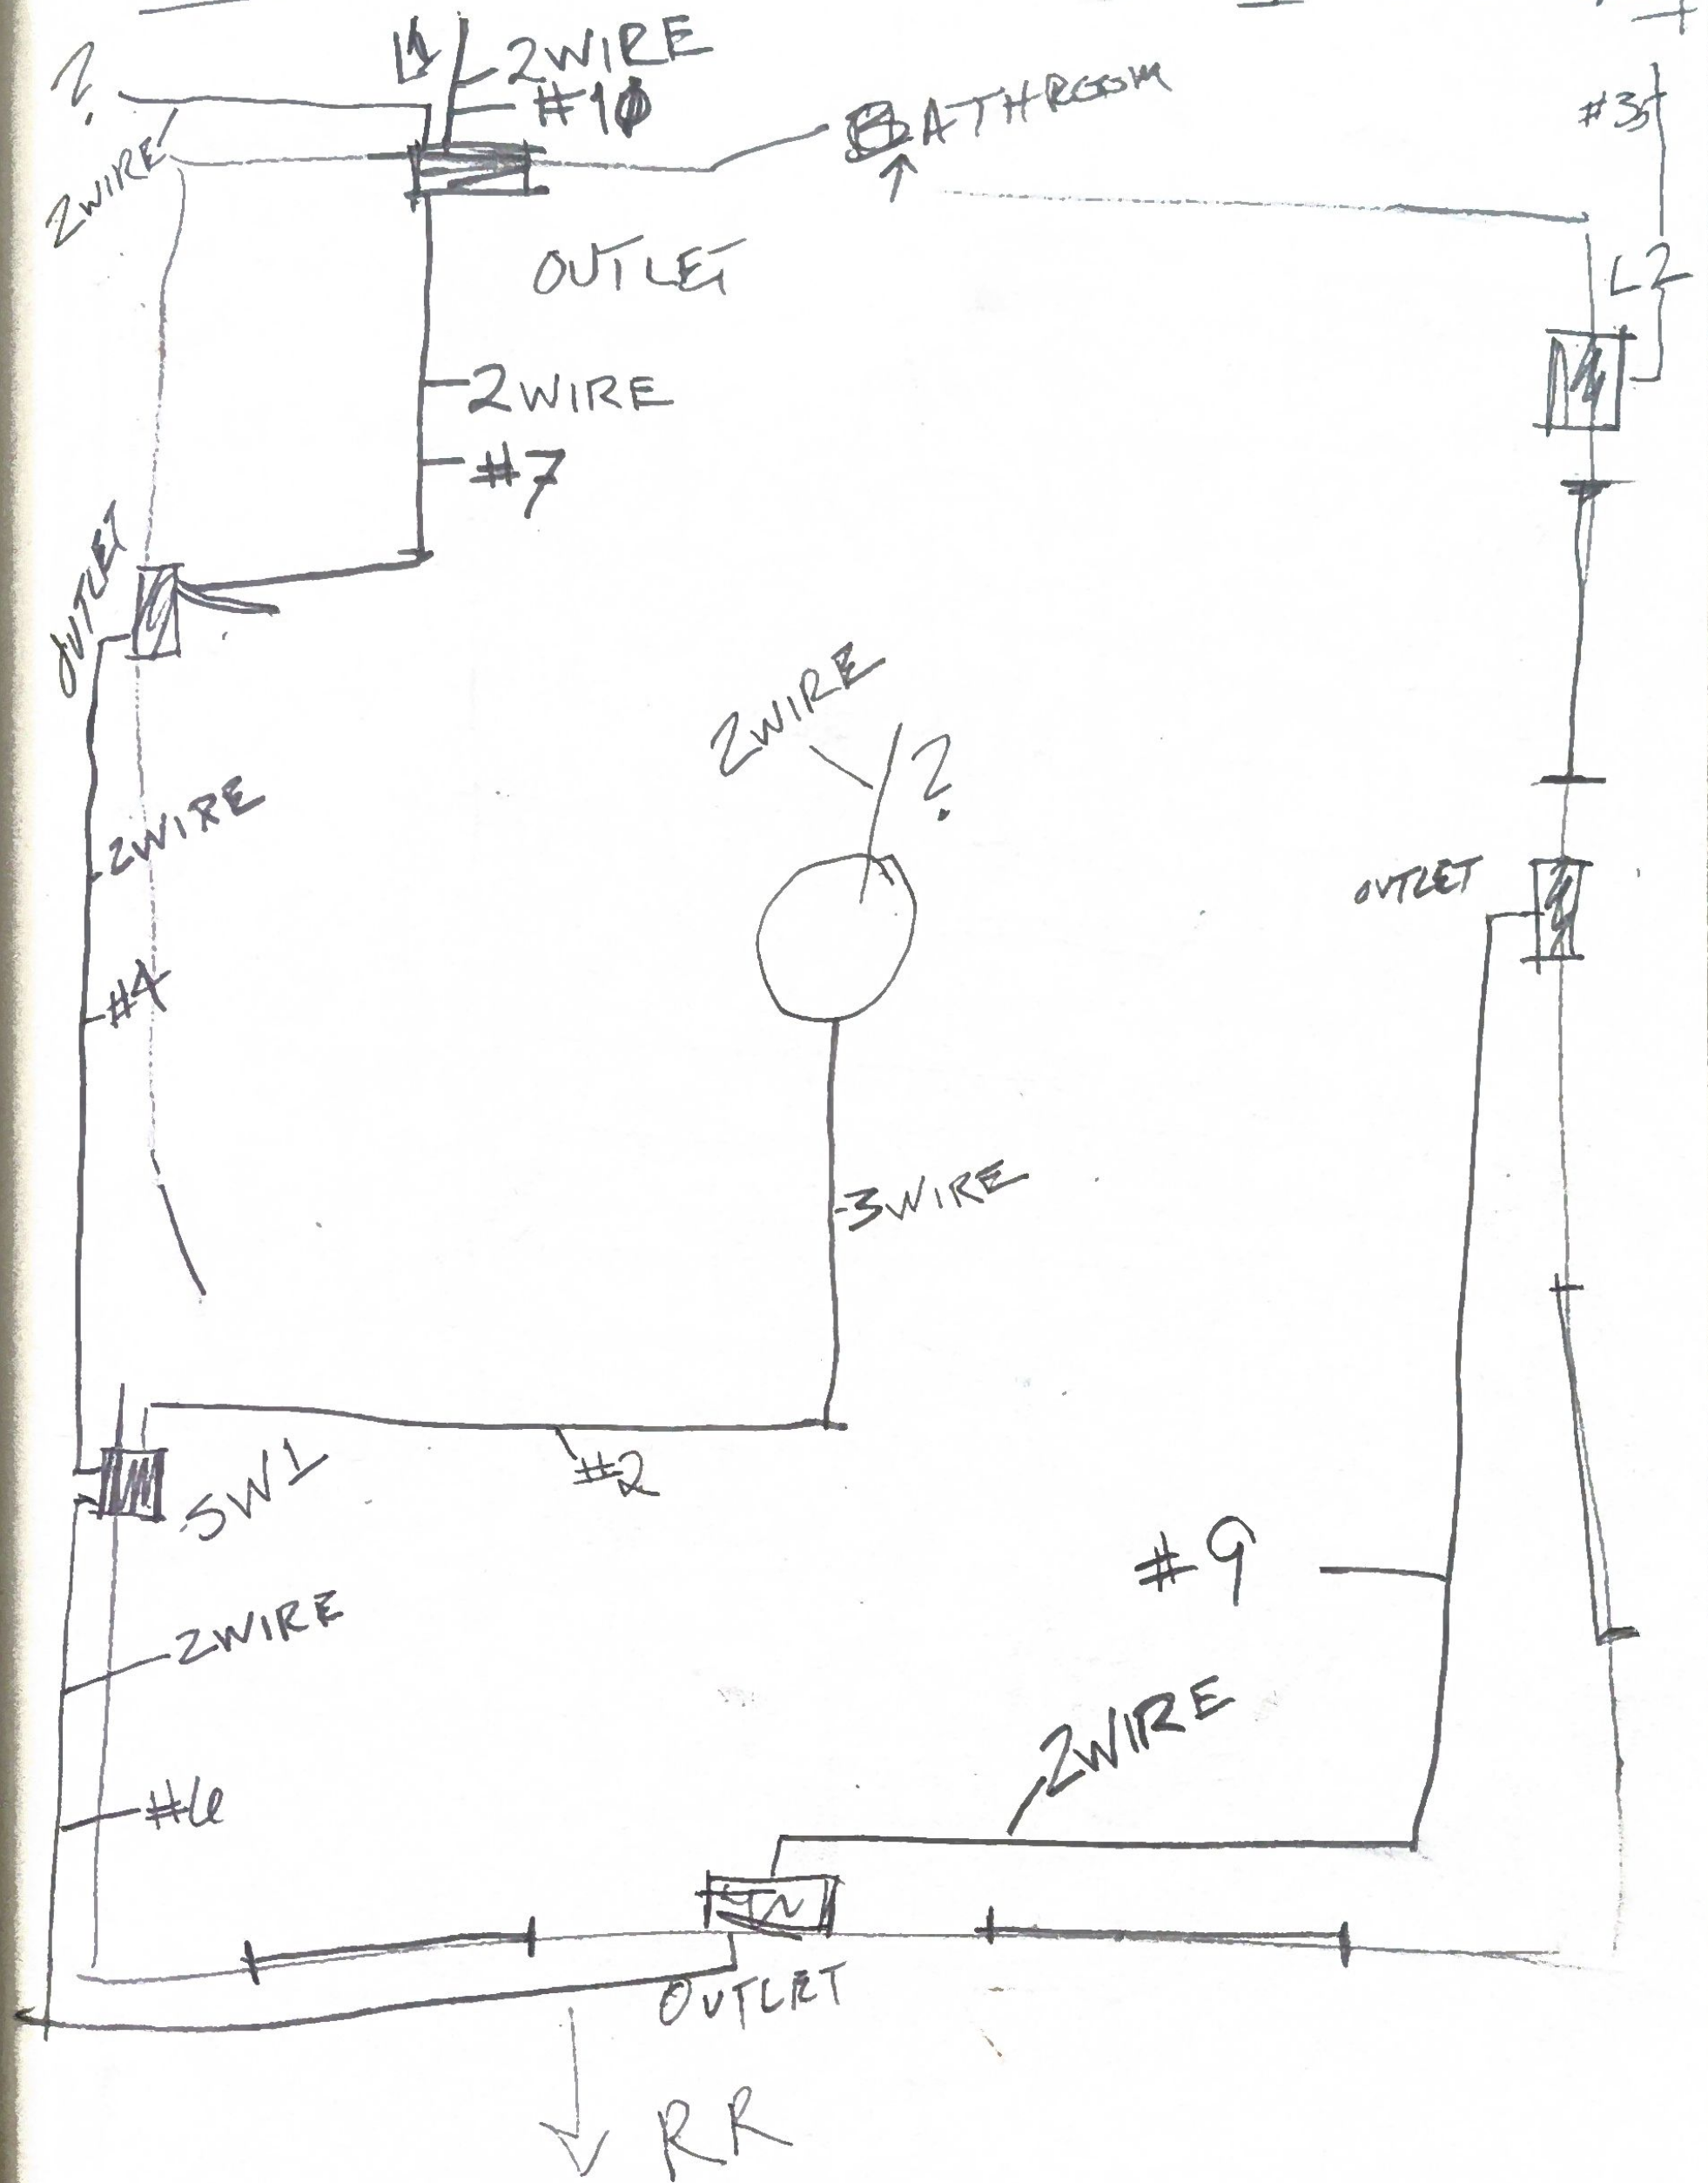

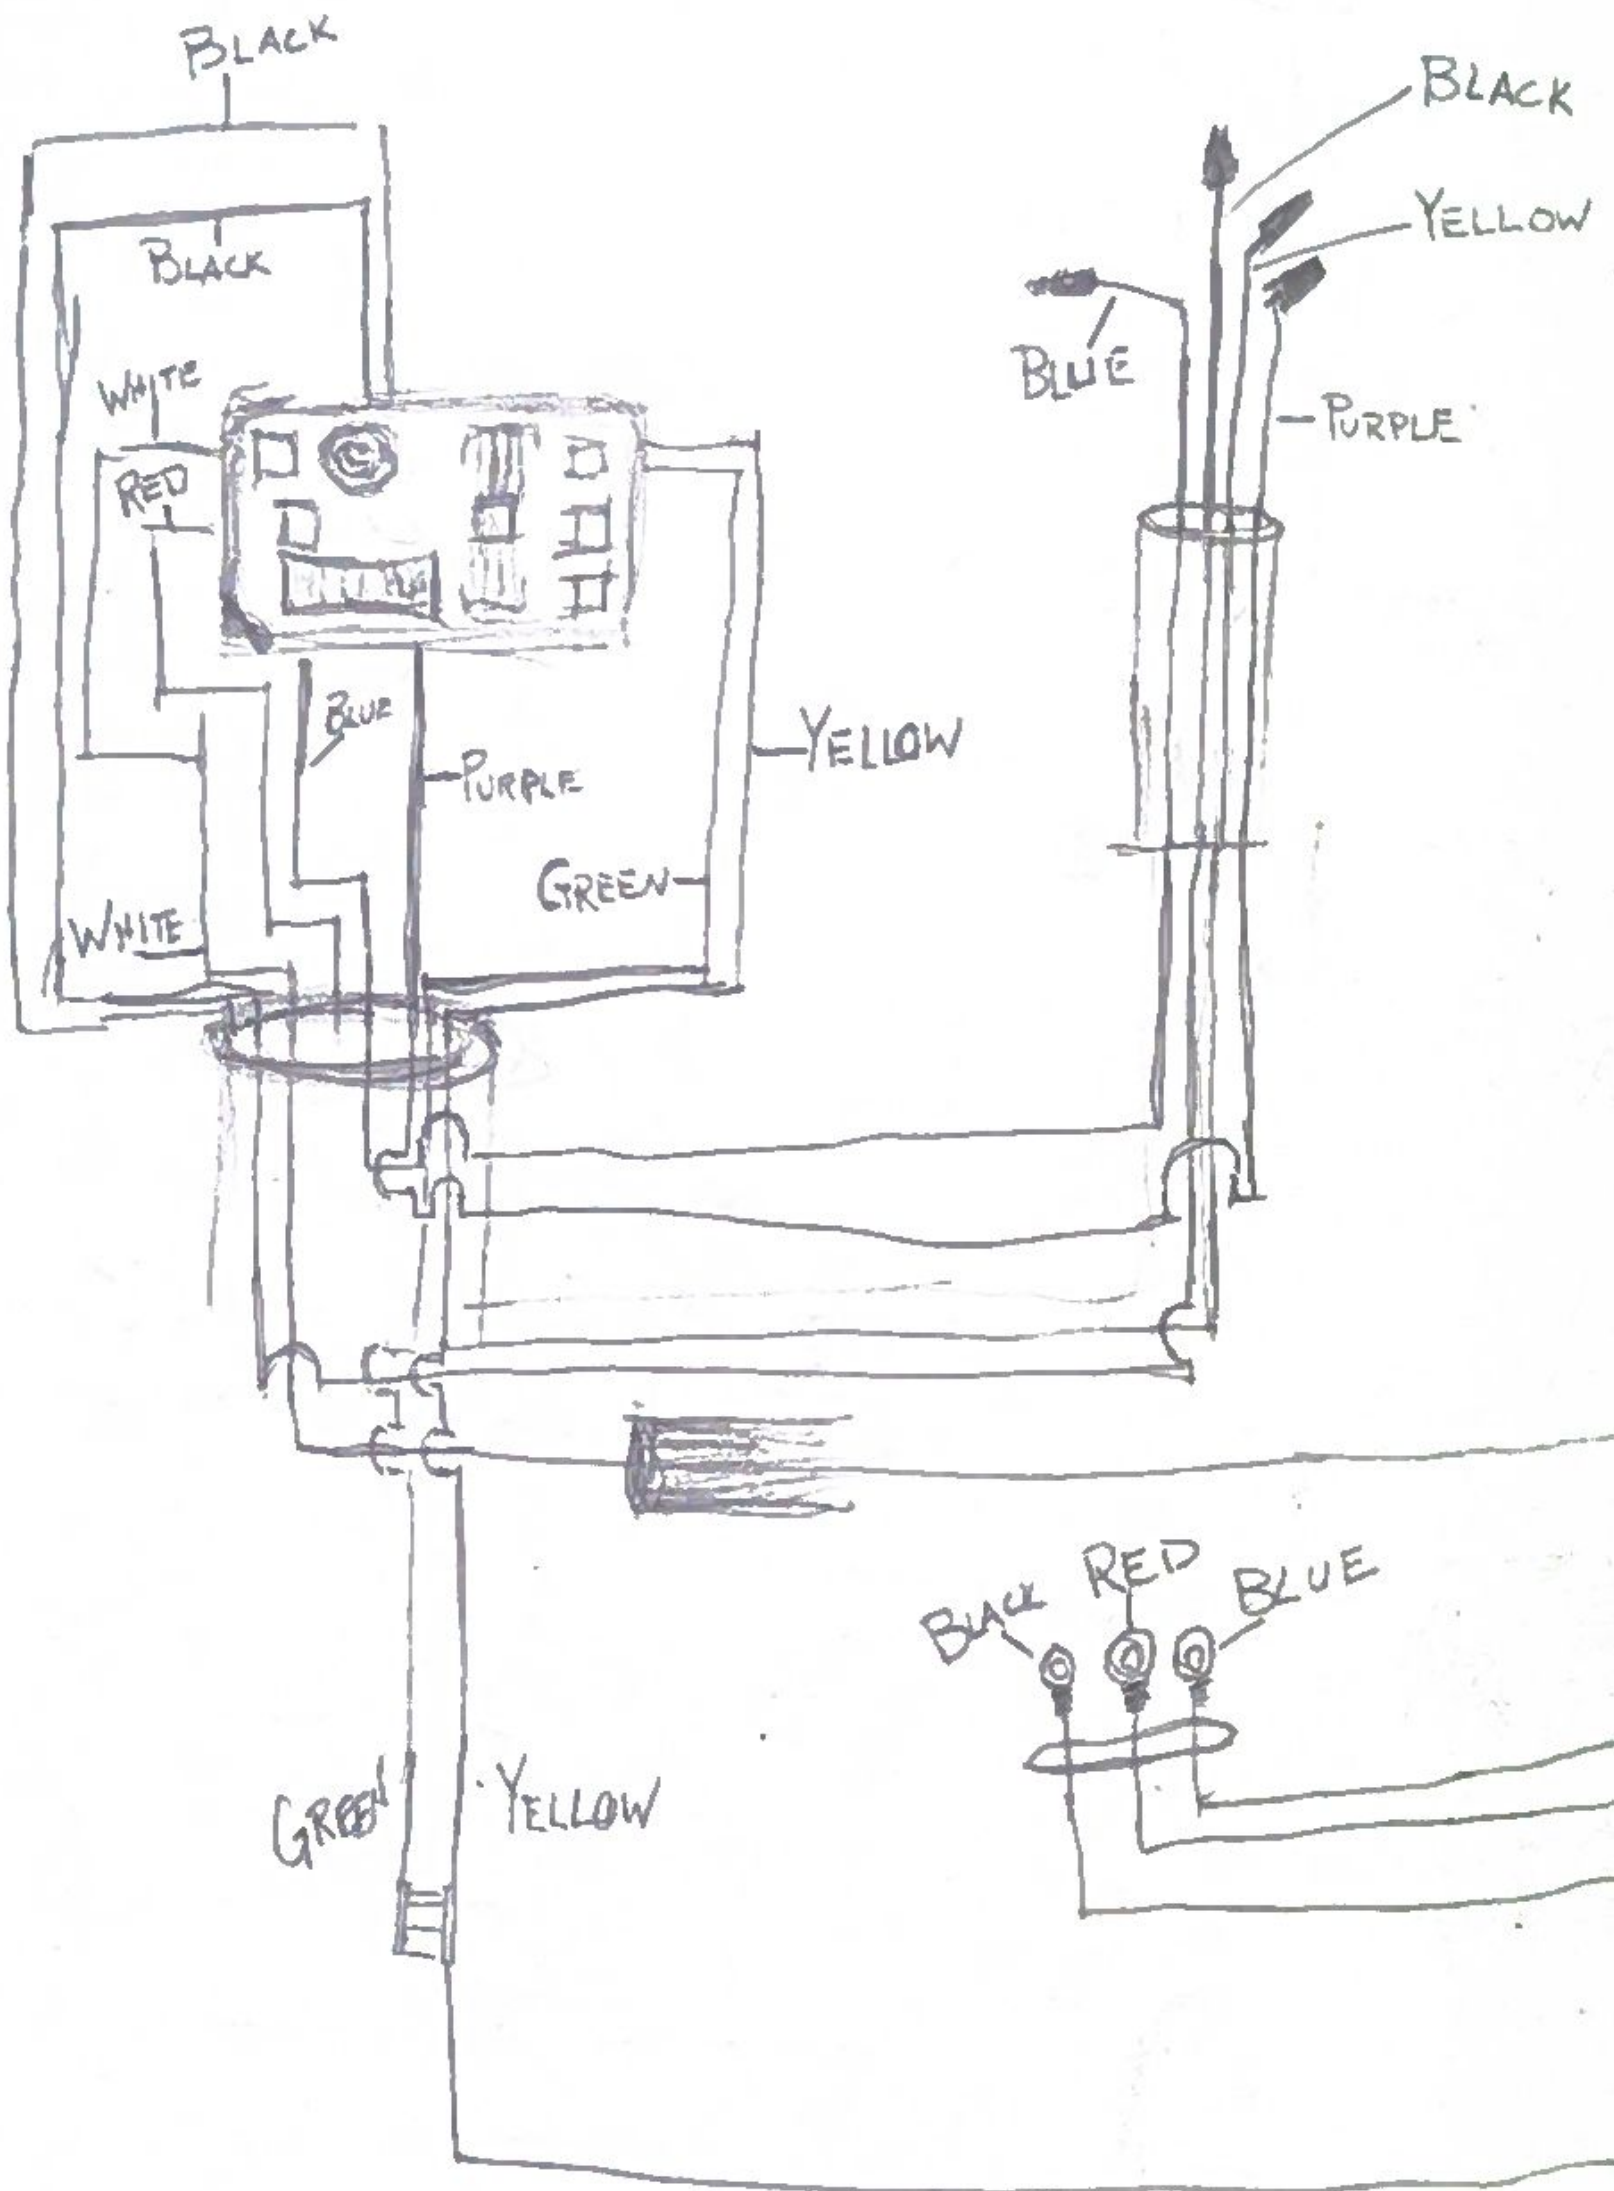


1 2 3 4 5

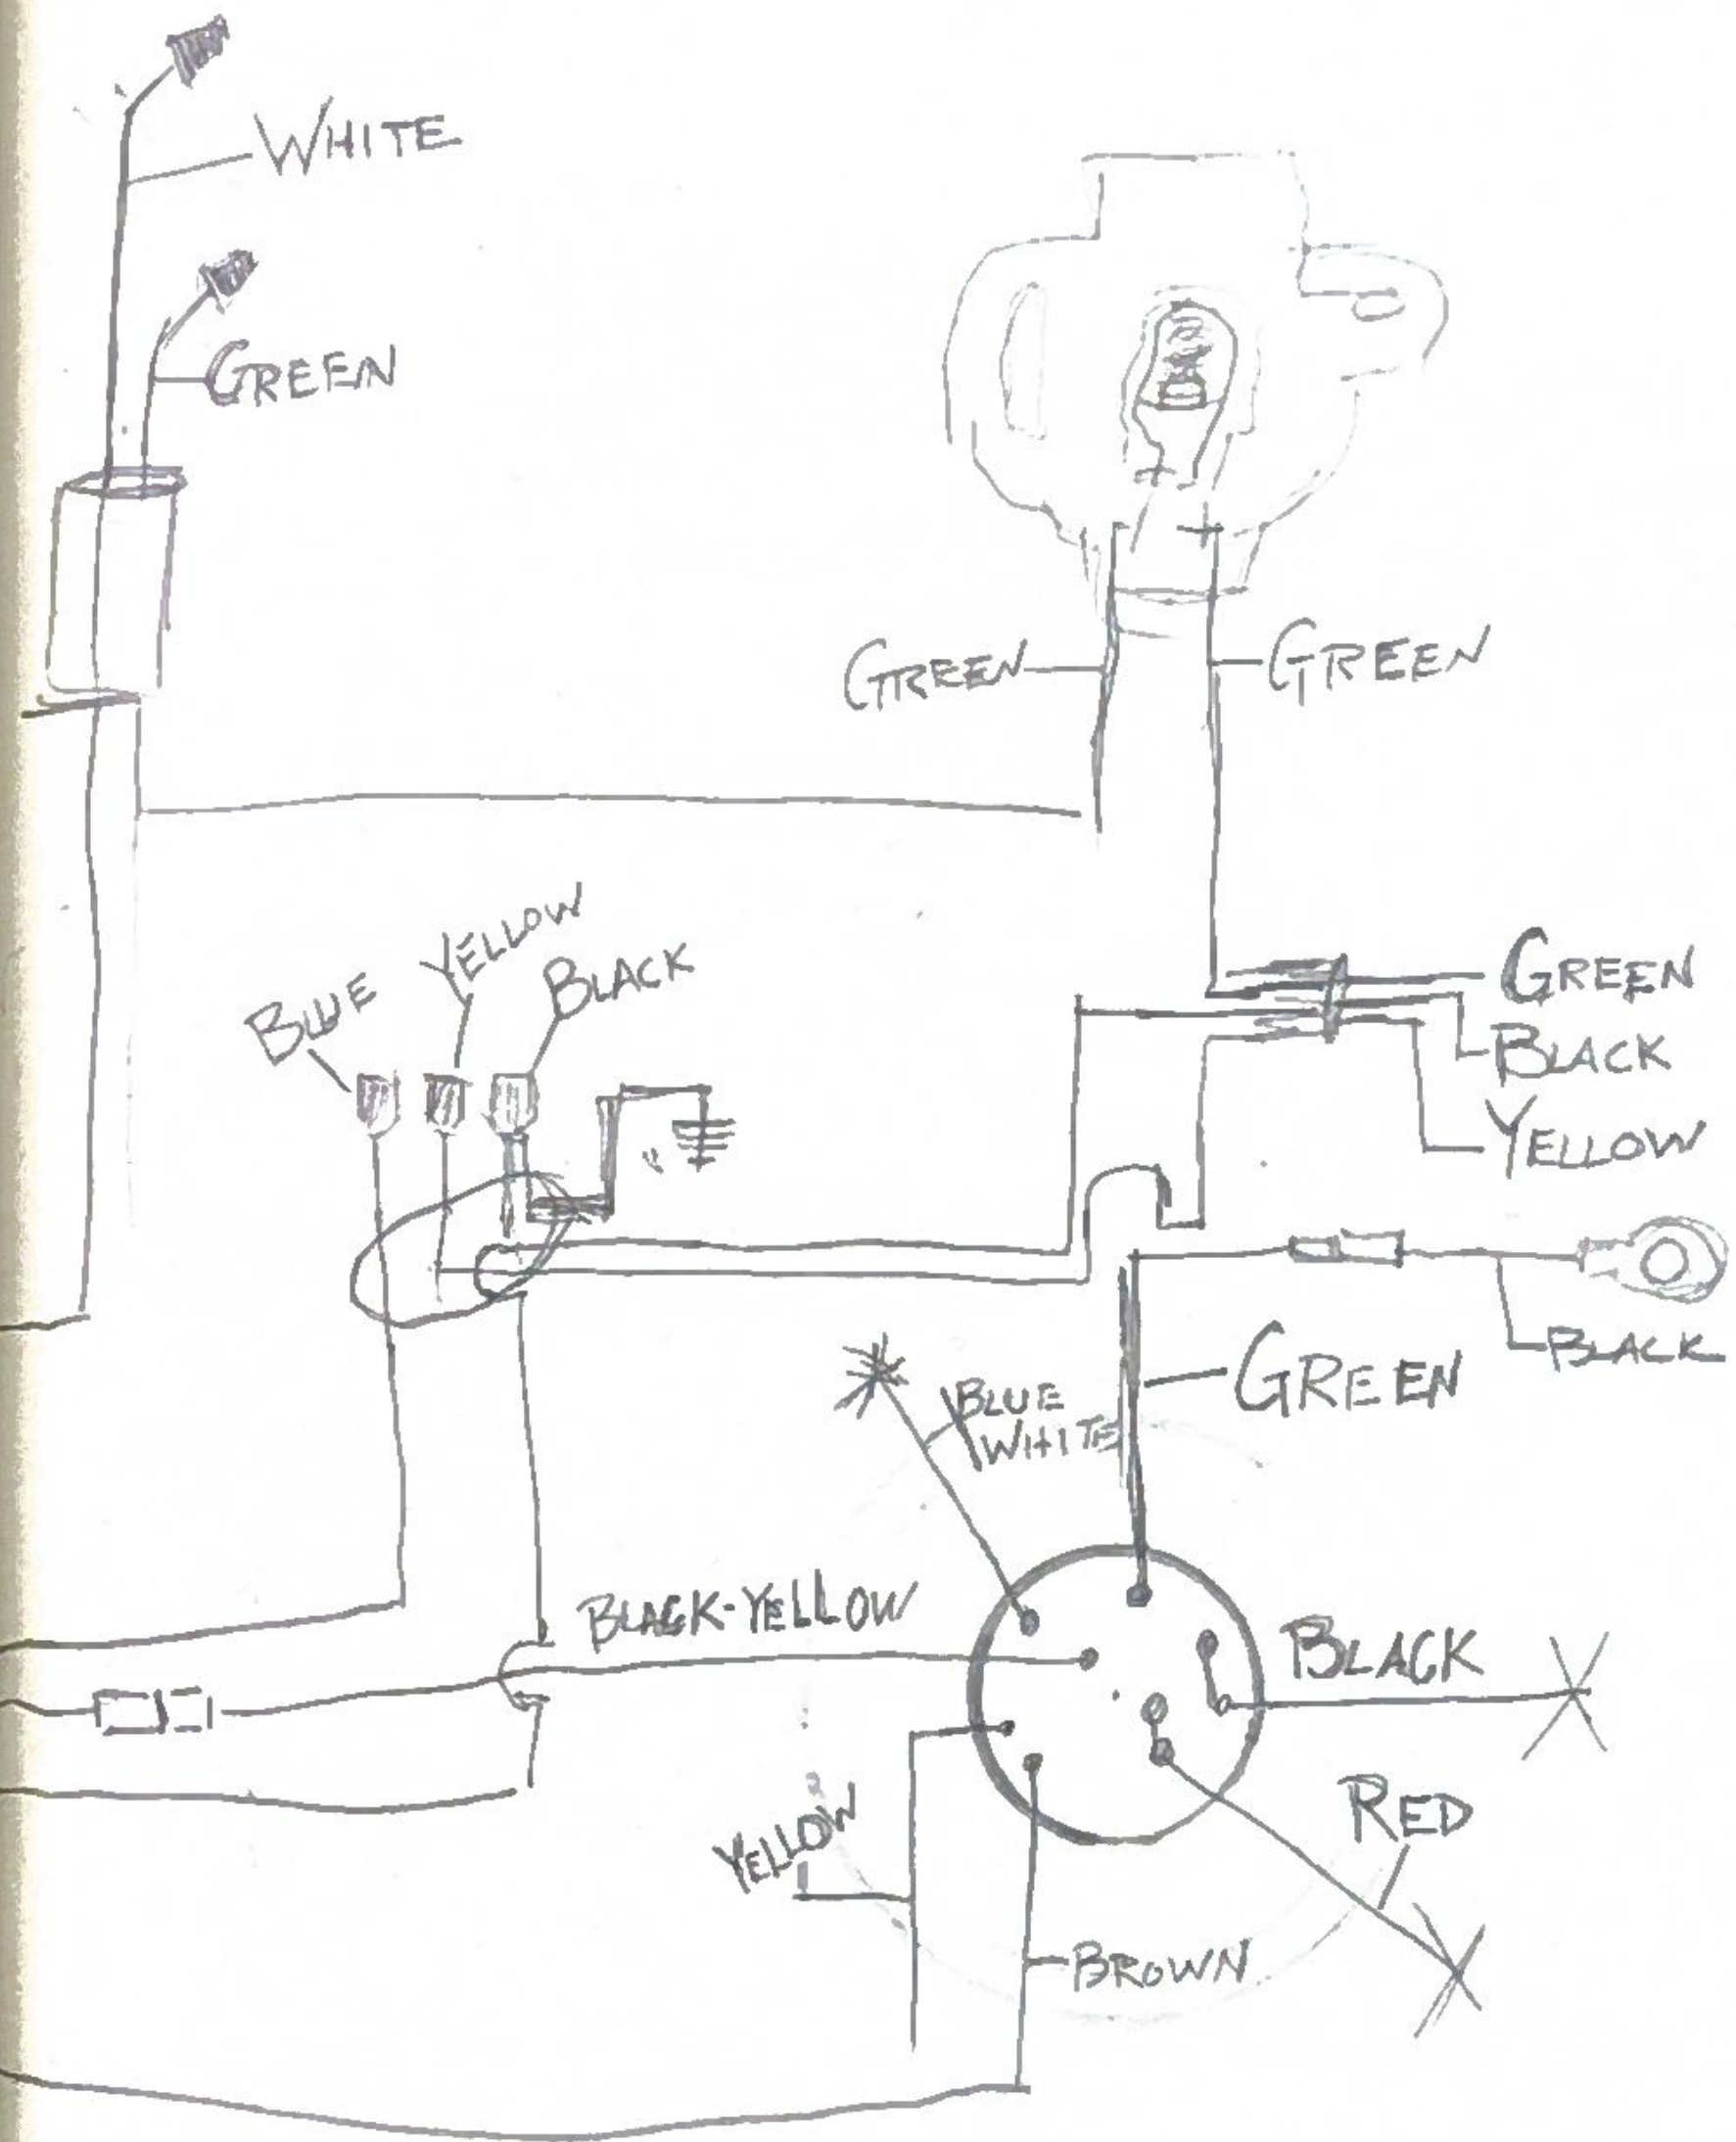


GUEST BATHROOM

121-JAN. 2024

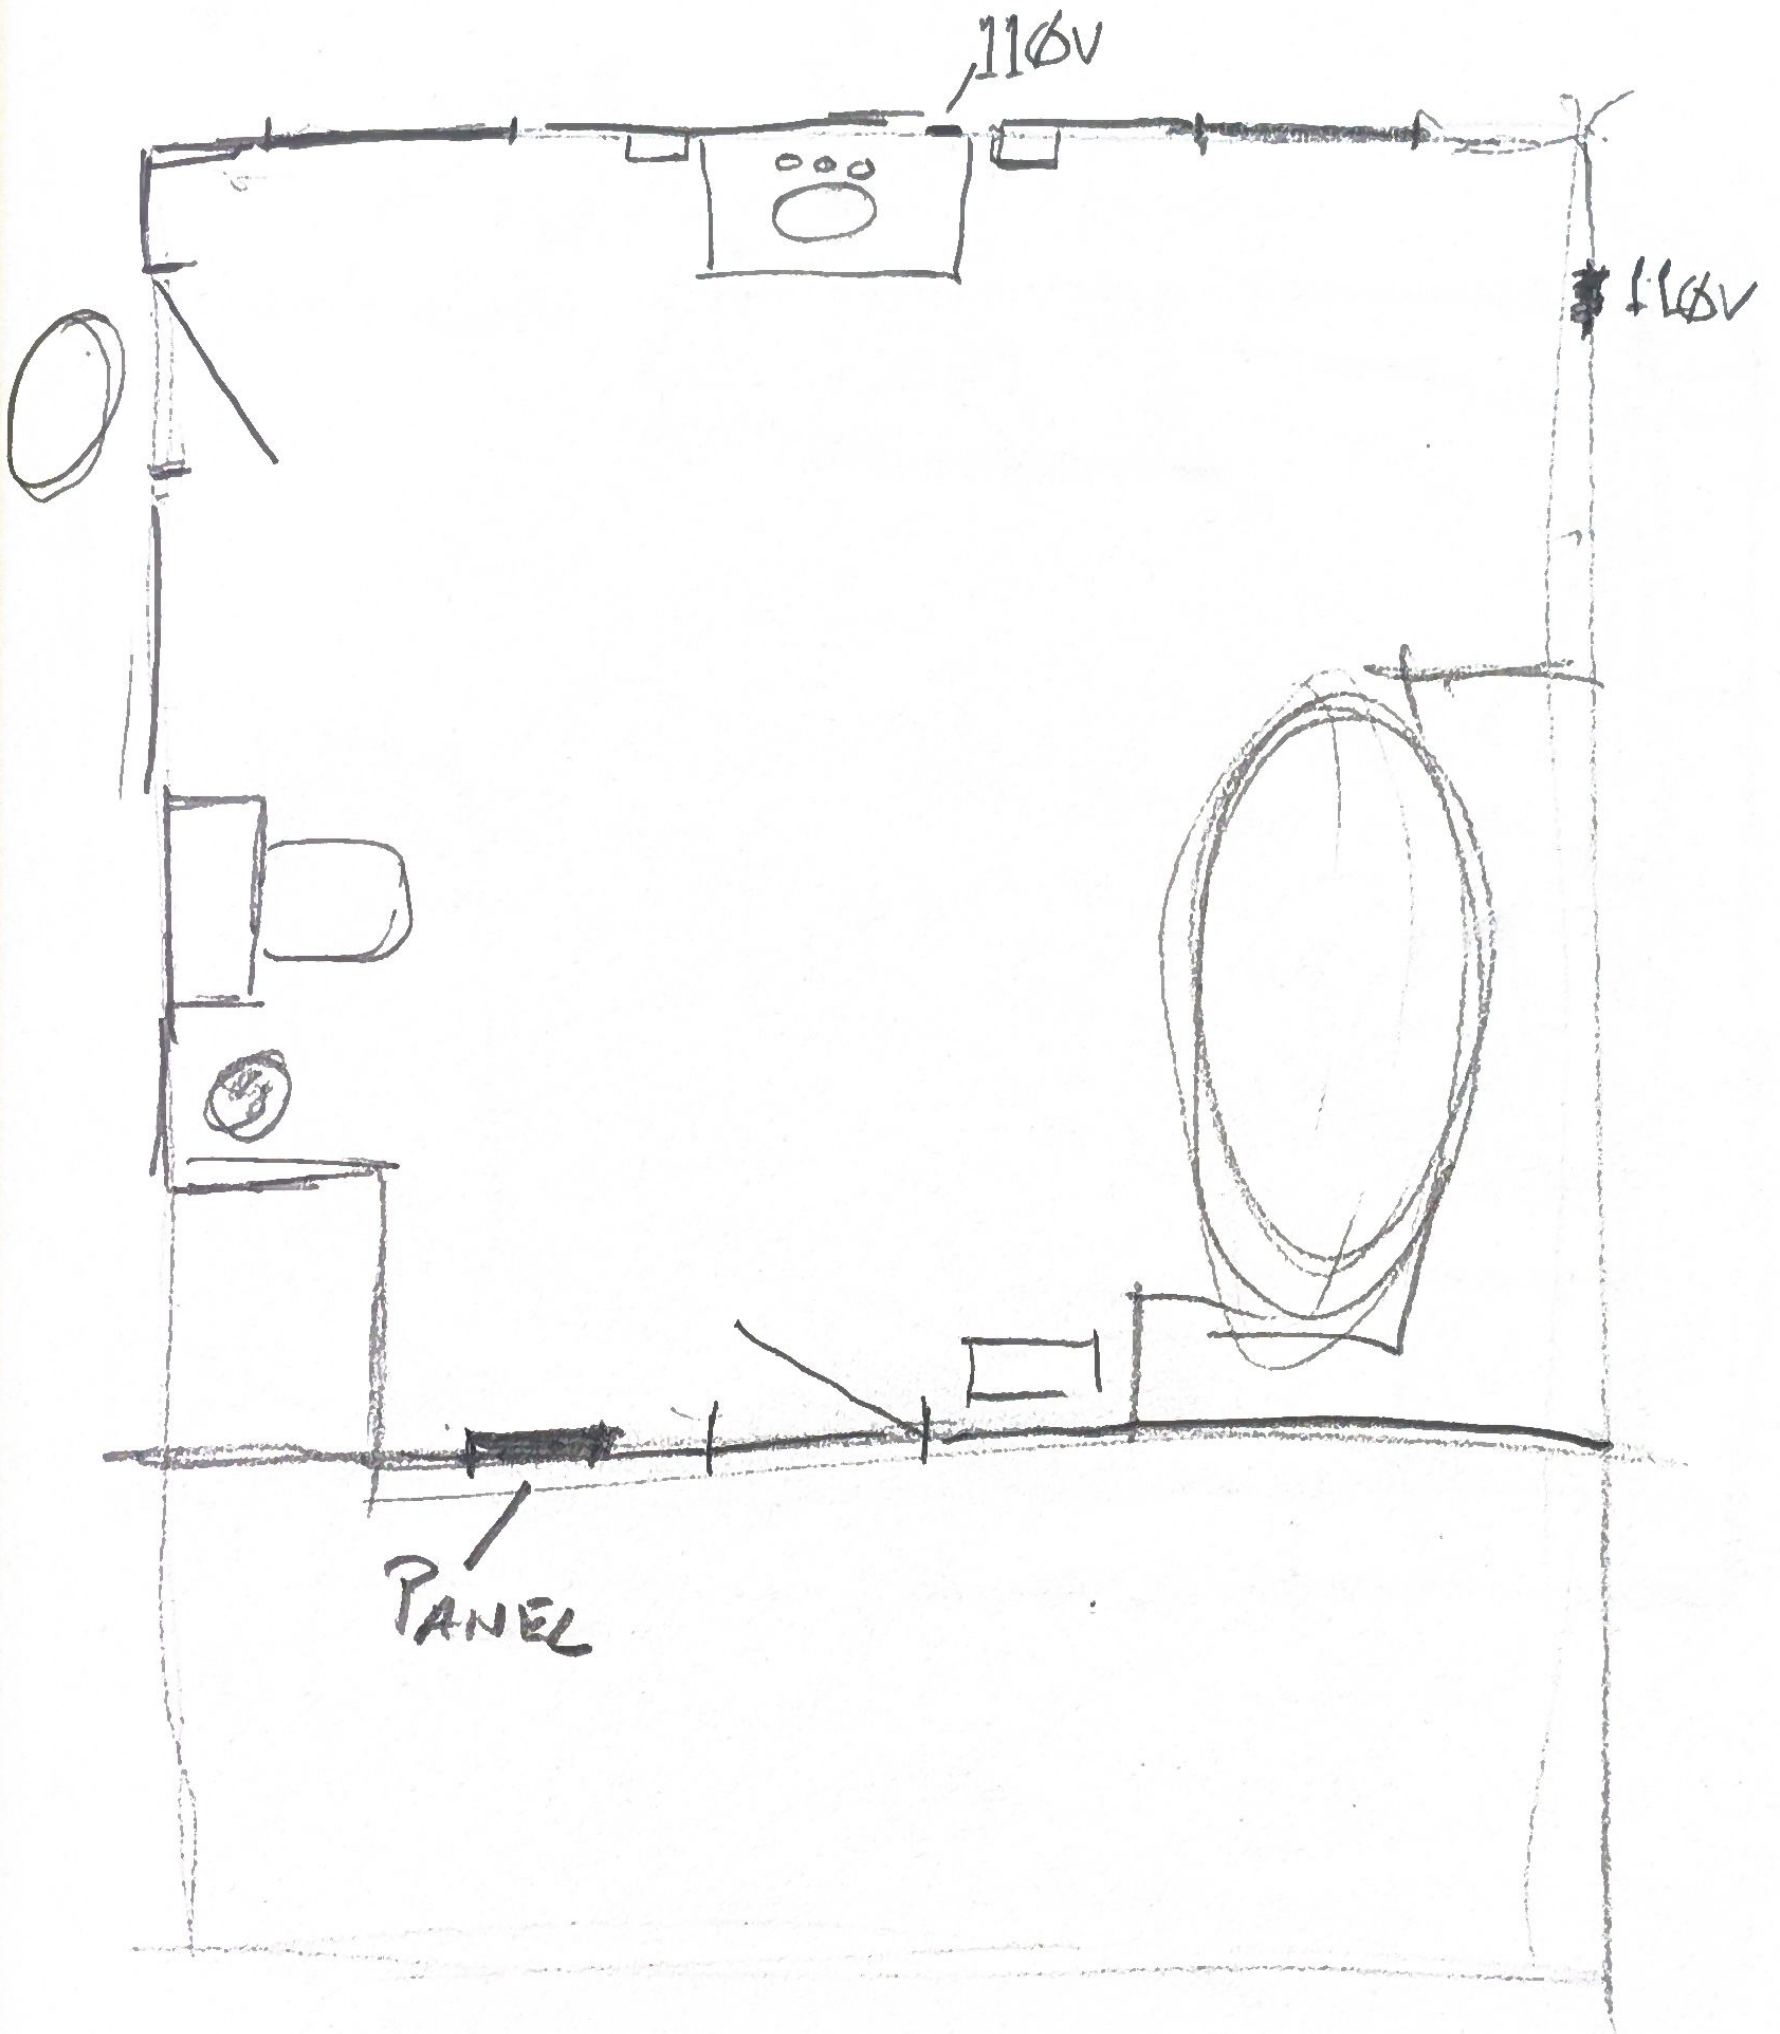

GUEST BATHROOM


140V

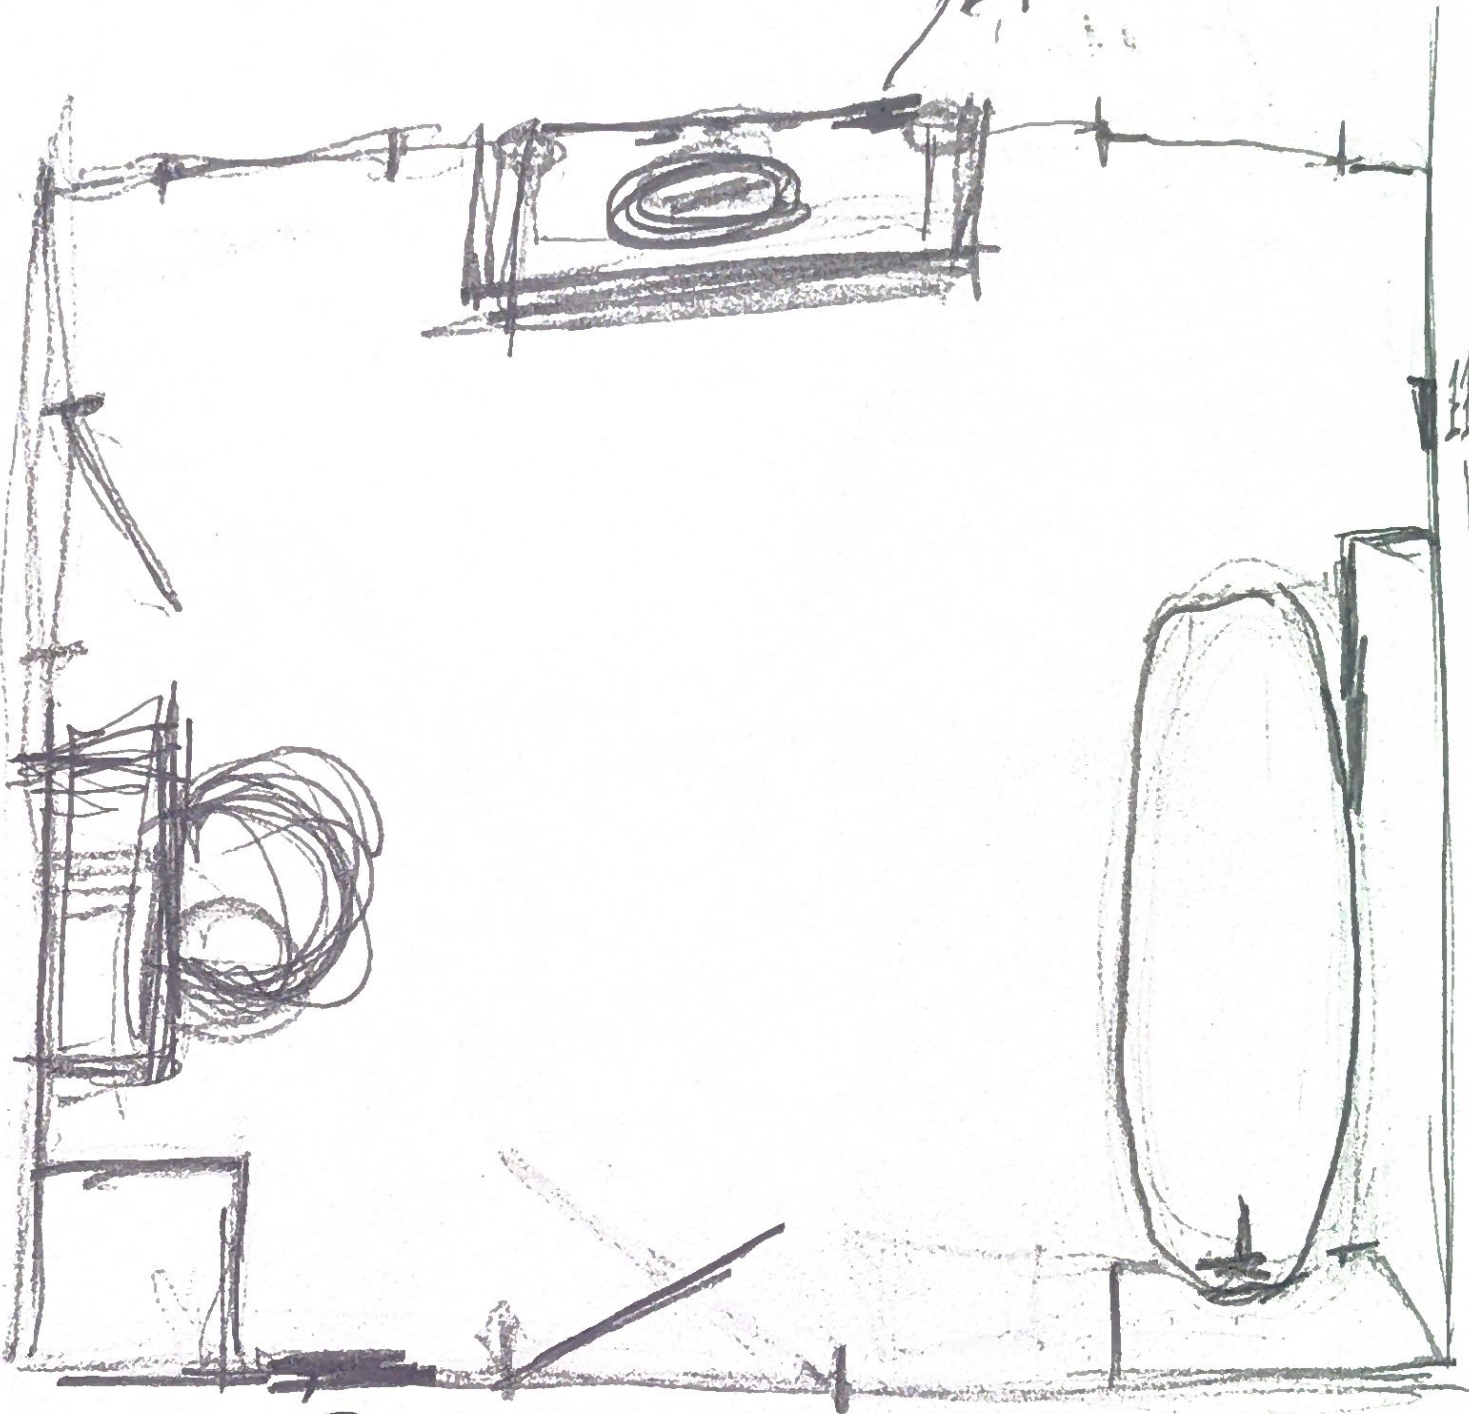

PANEL.

CABLE


11ΦV

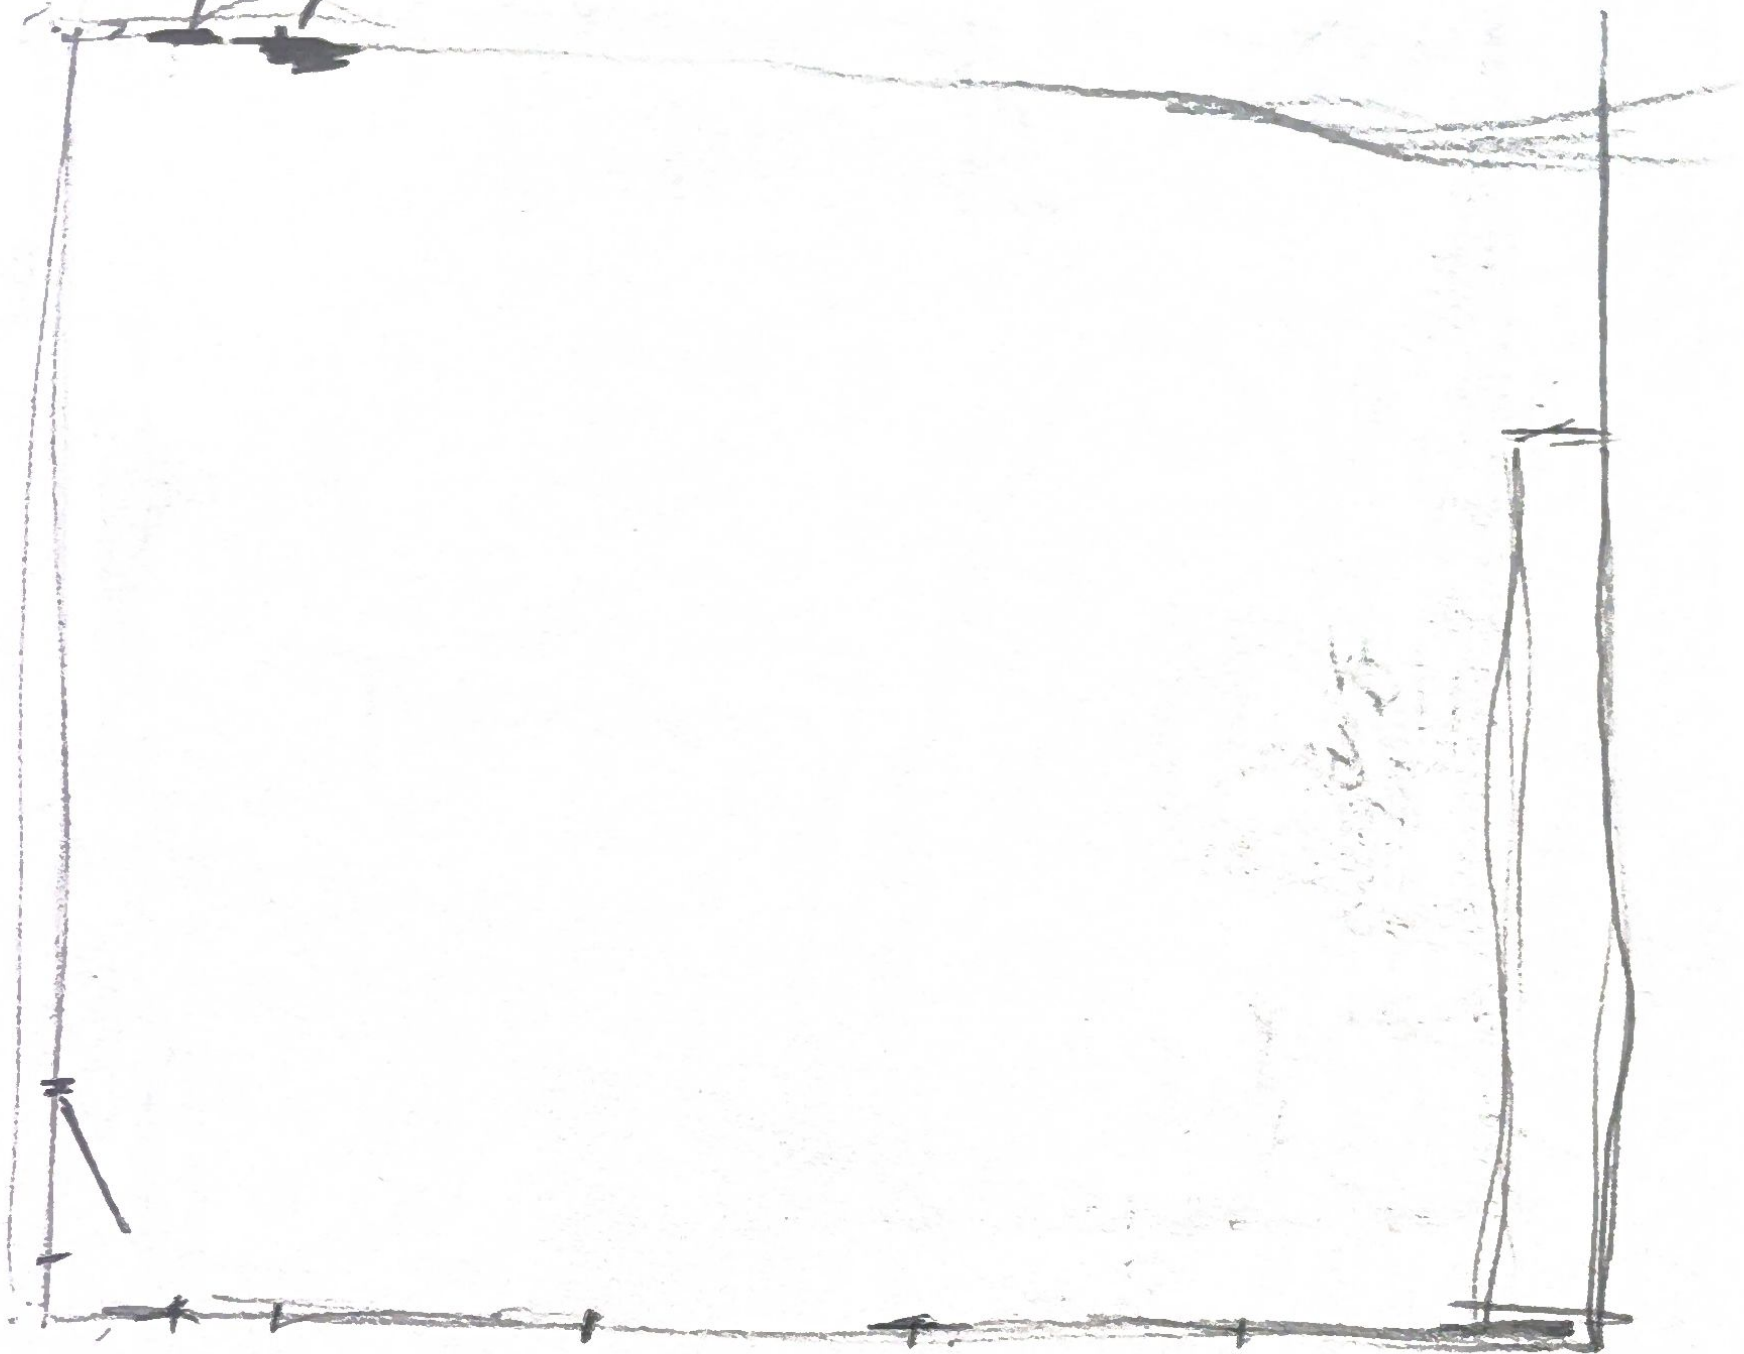


25 JAN-2024

SWITCH


→ N

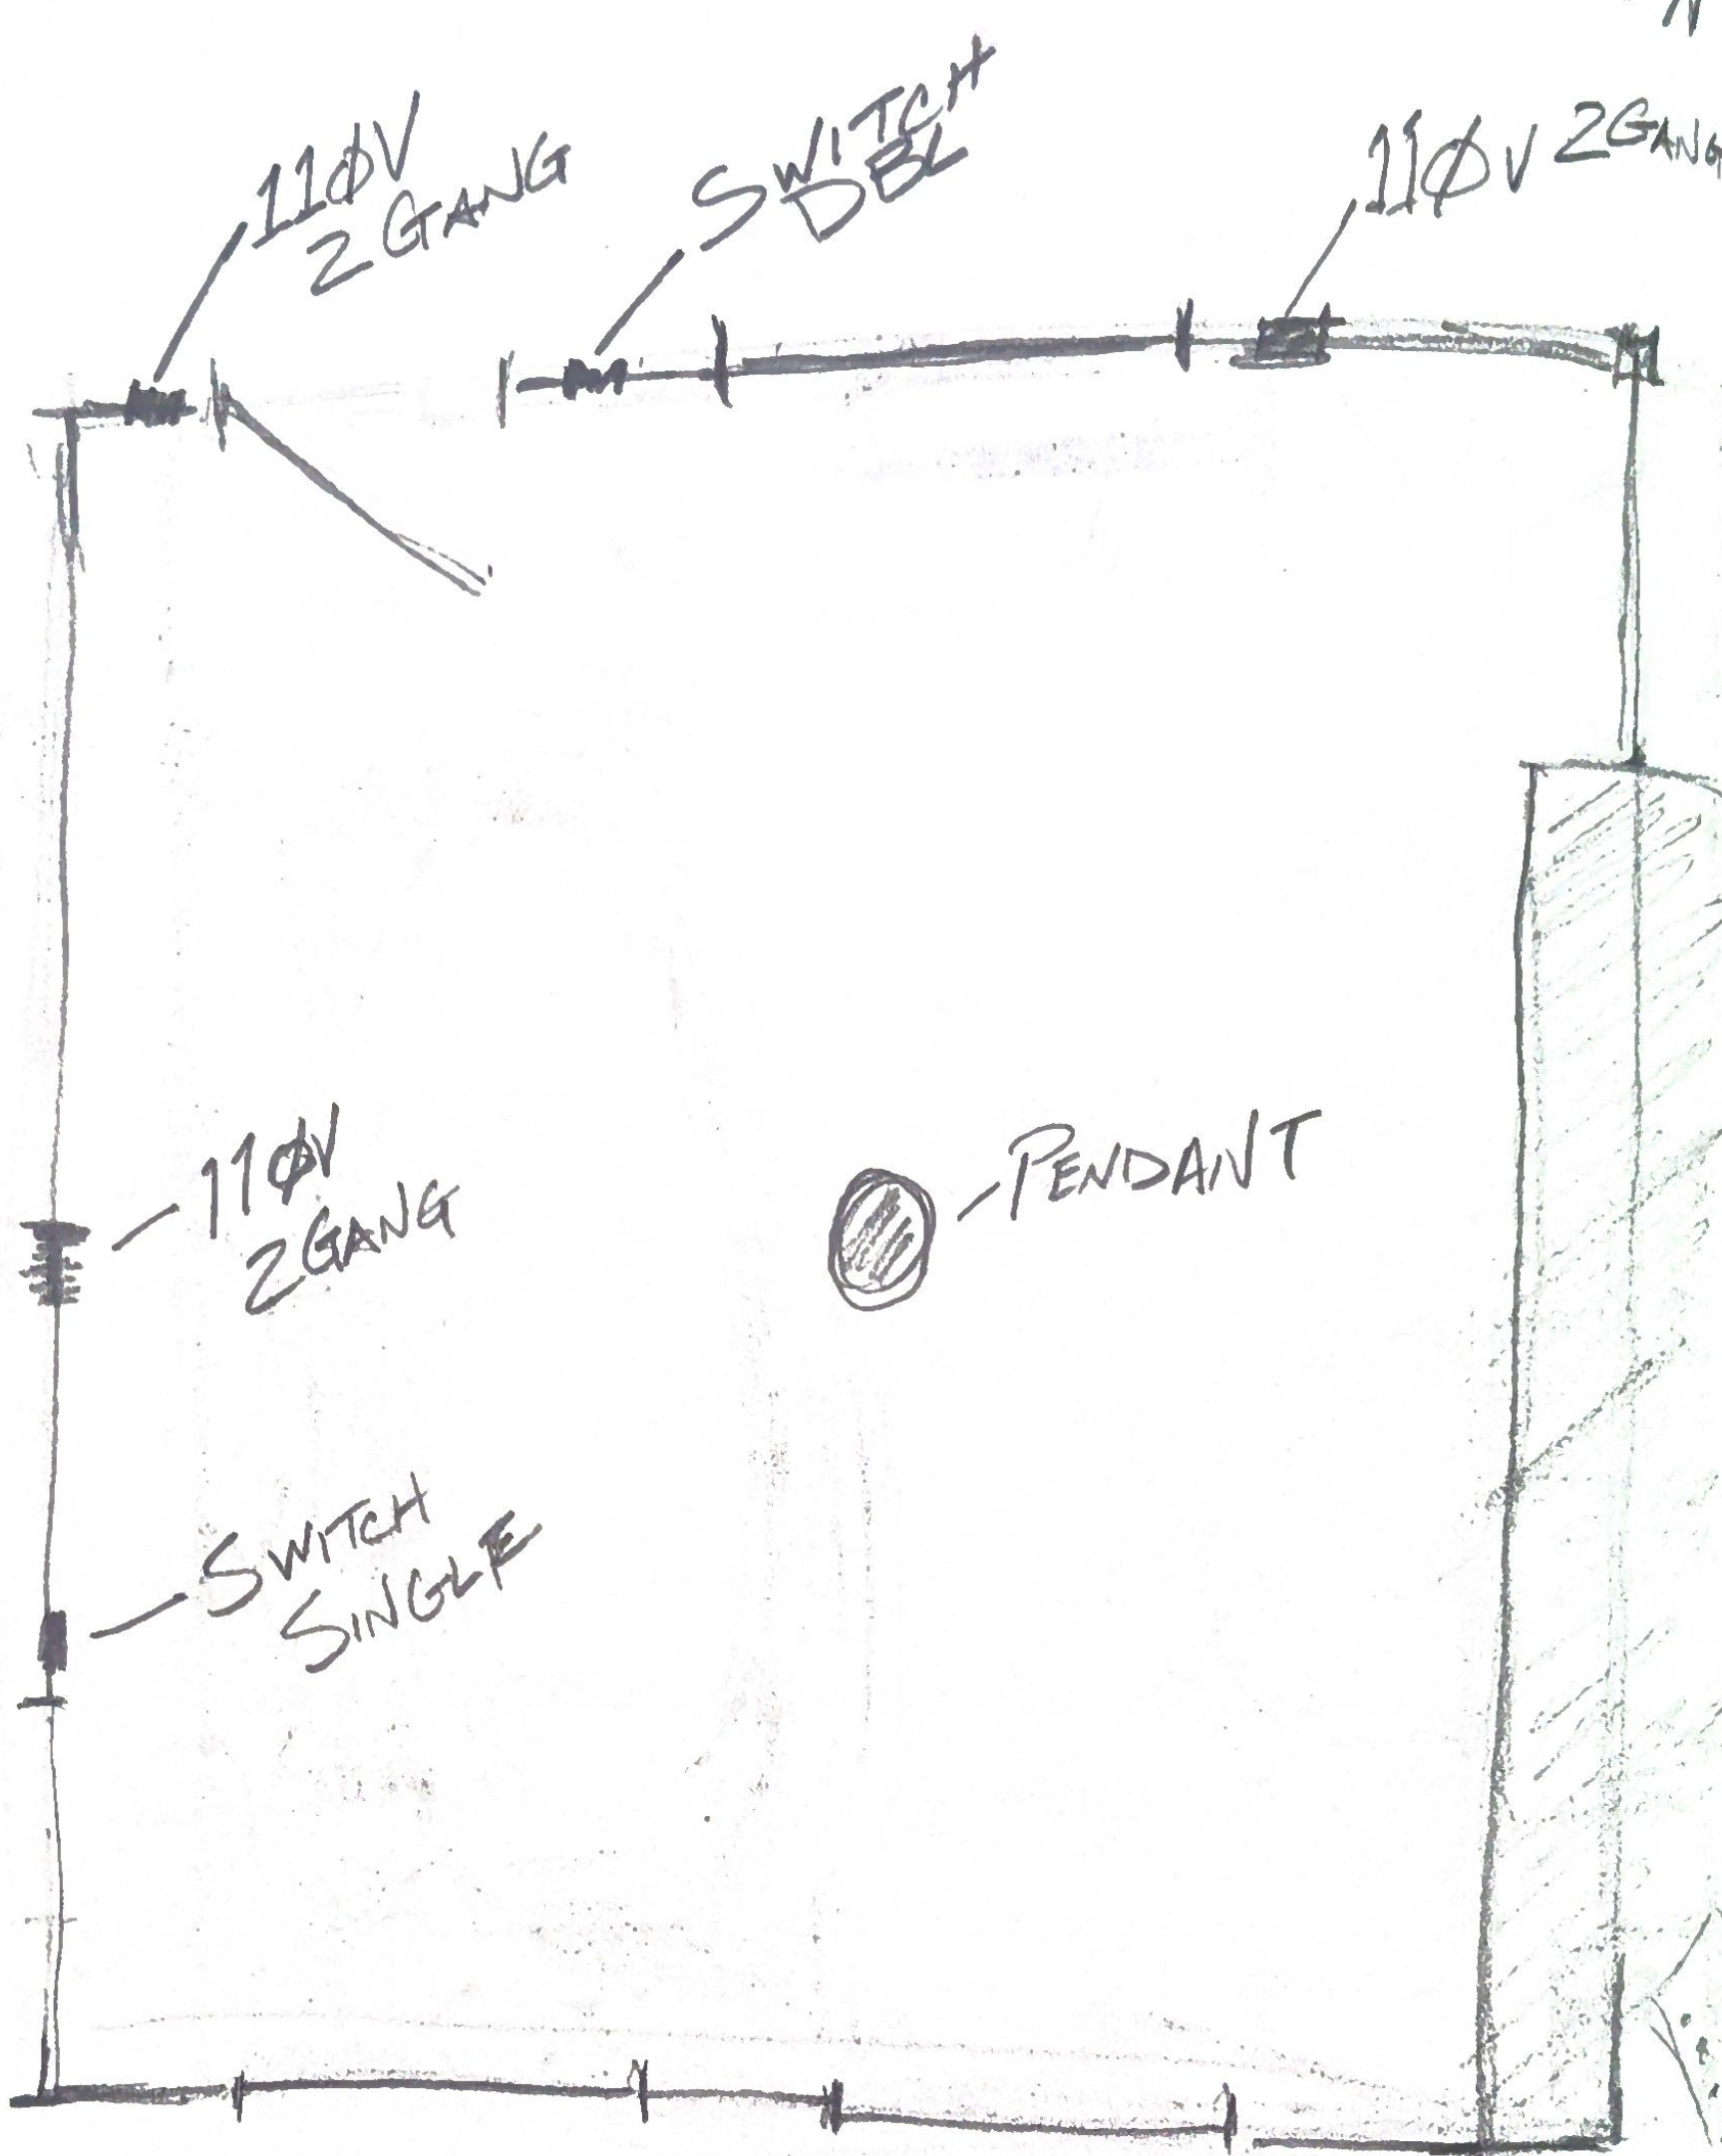

23-JAN-2024 + GUEST BATH

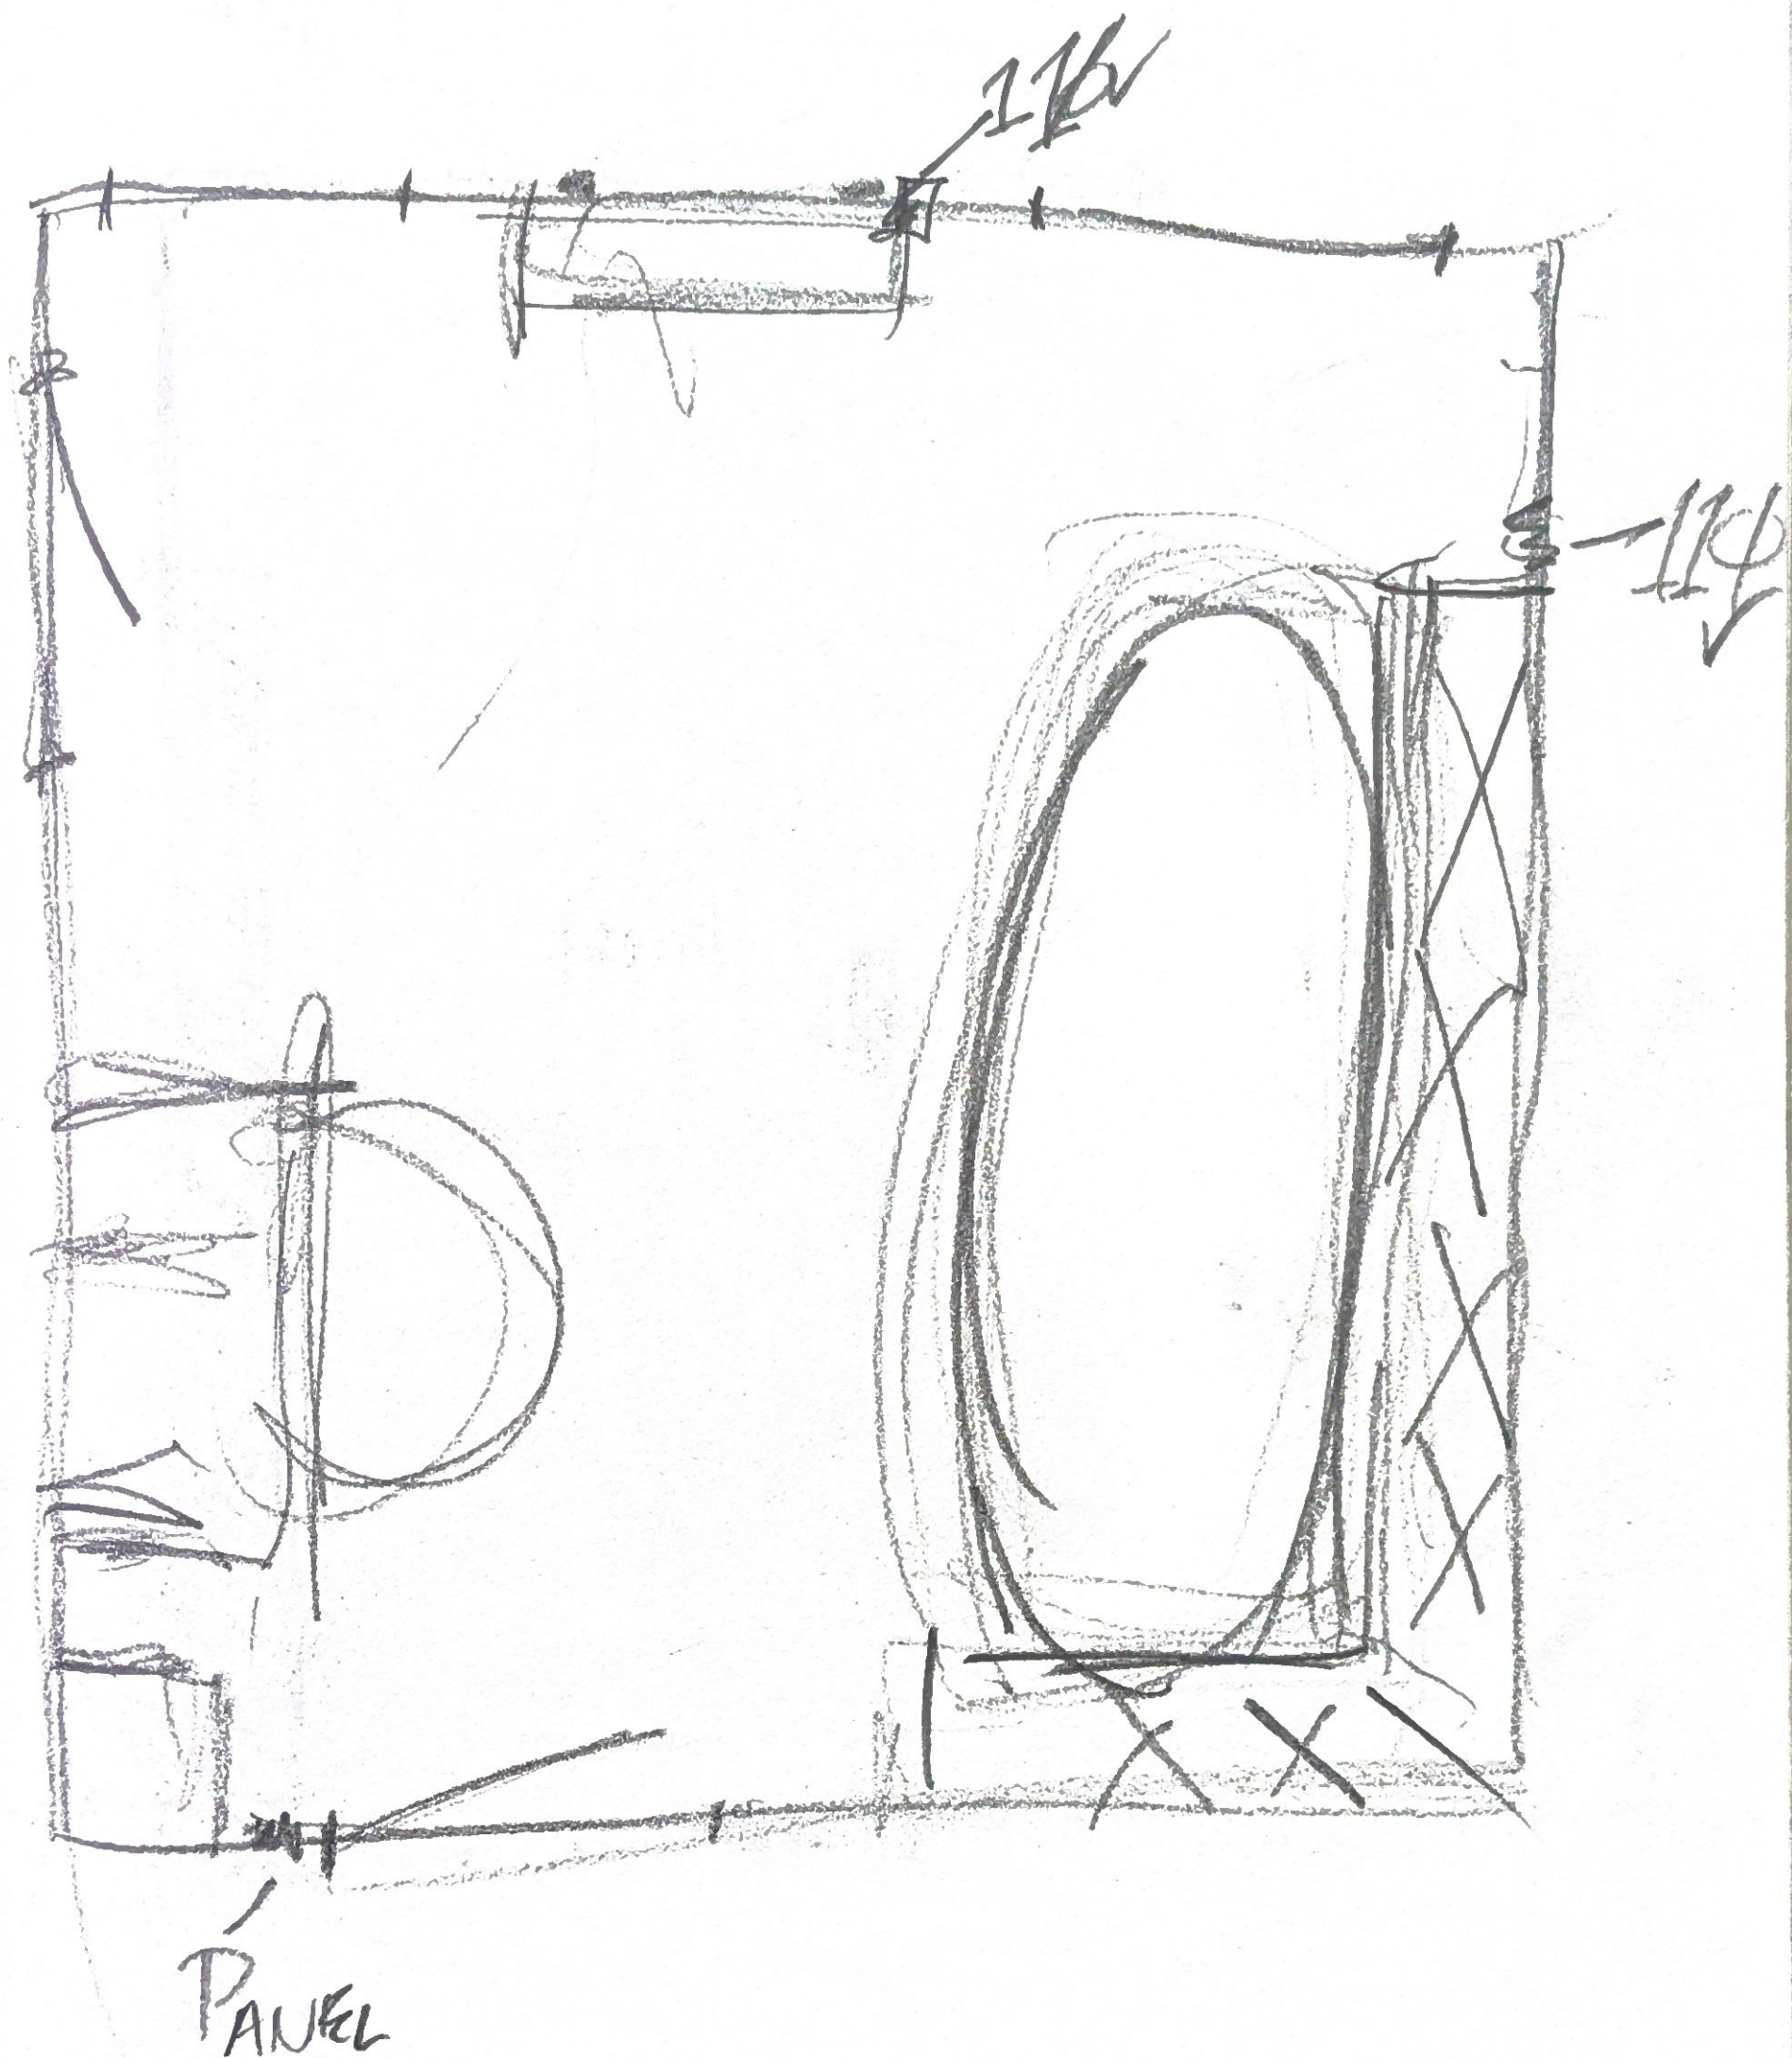




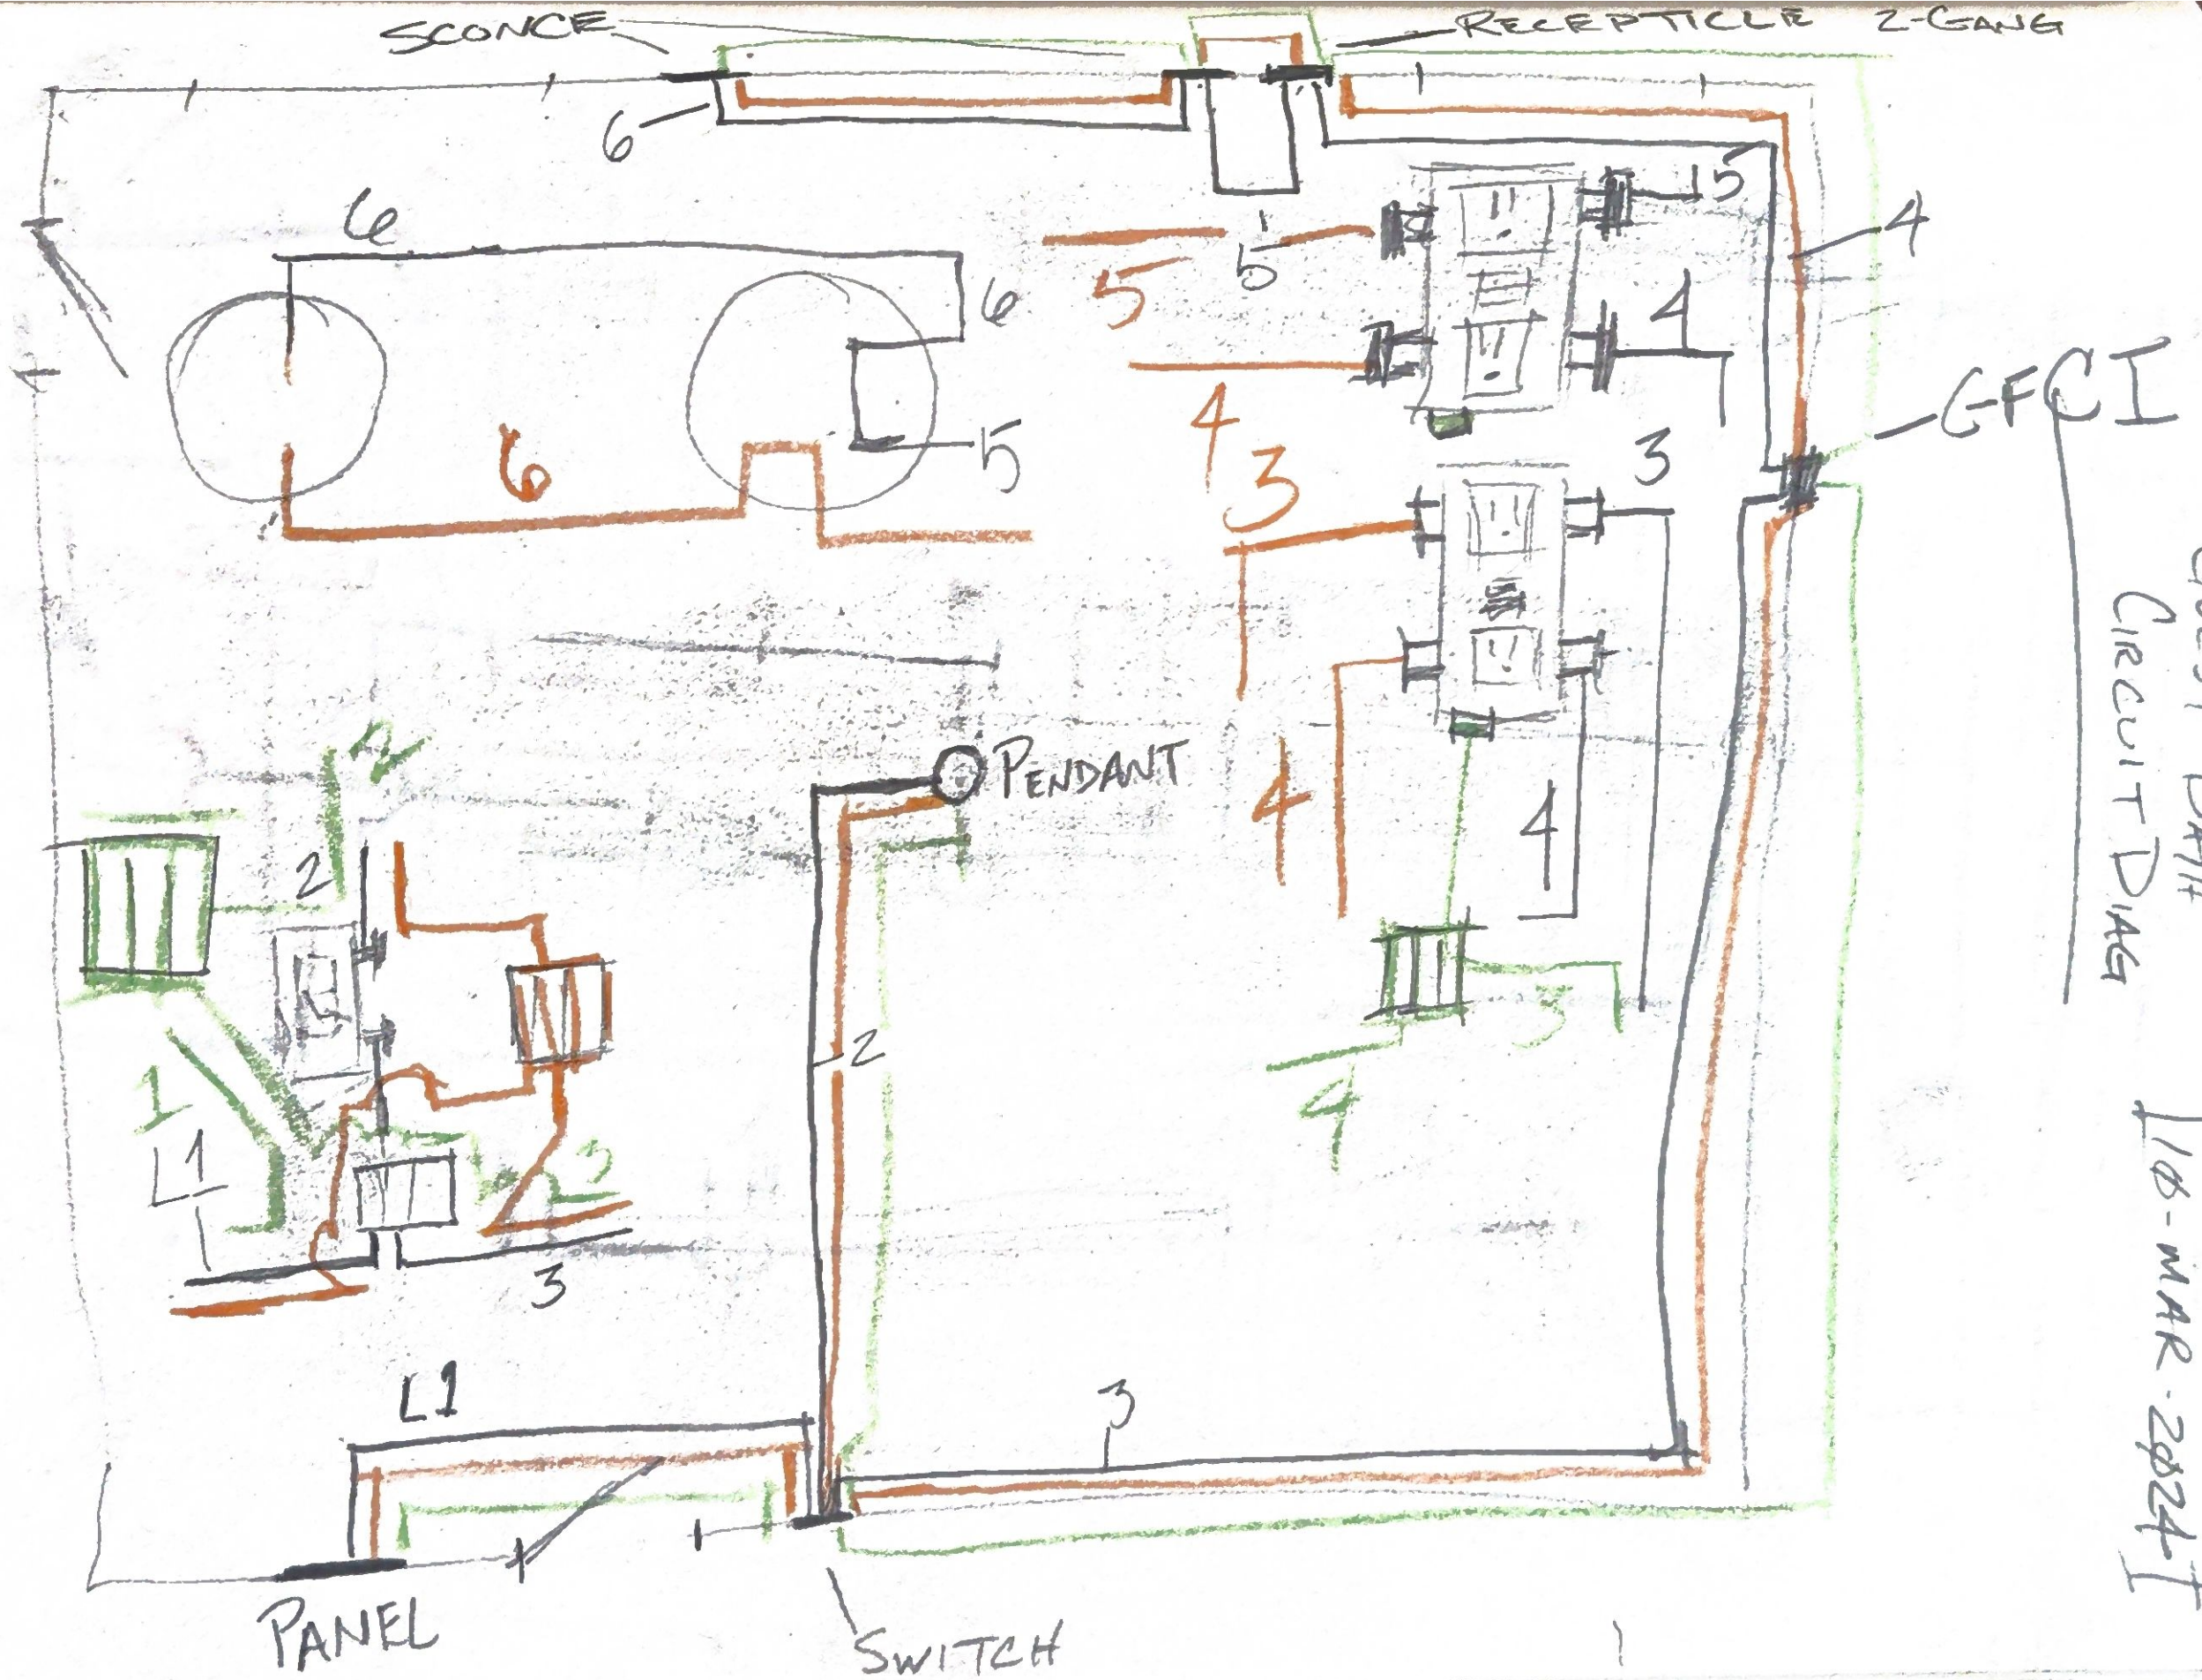


Circuit Diagram


118-MAR-2024

GUEST BATHROOM CIRCUIT DIAGRAM

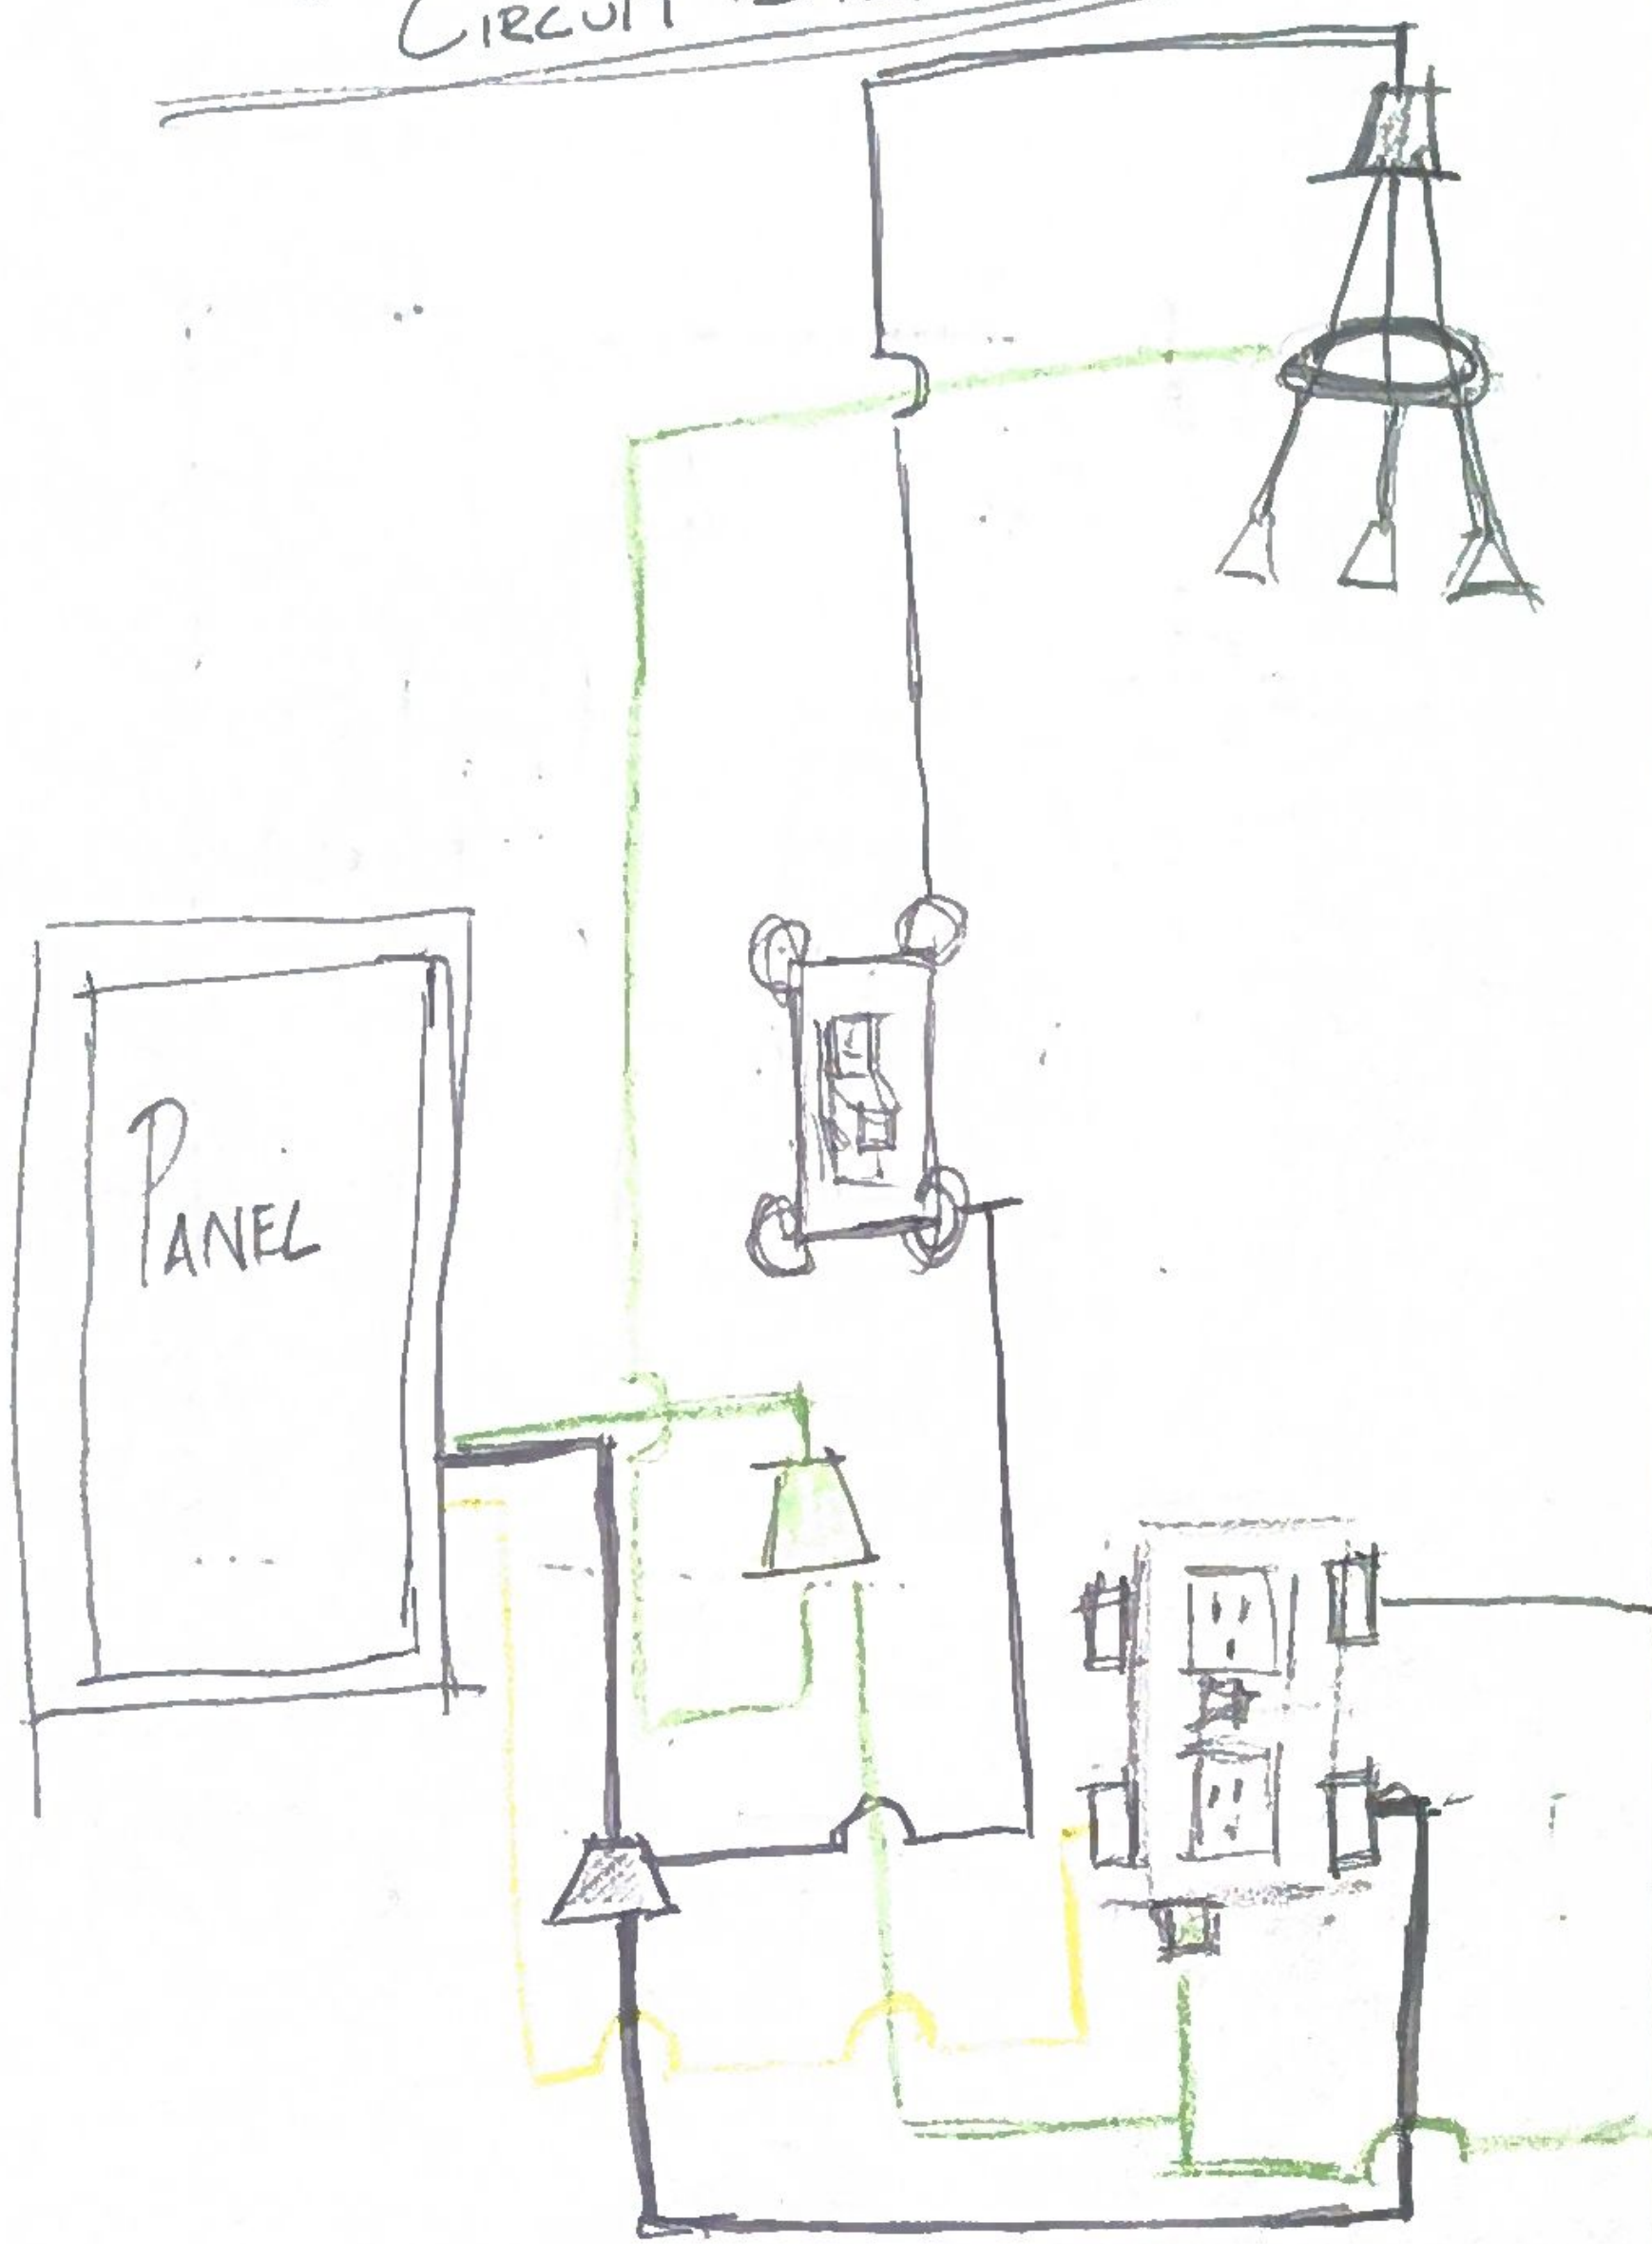

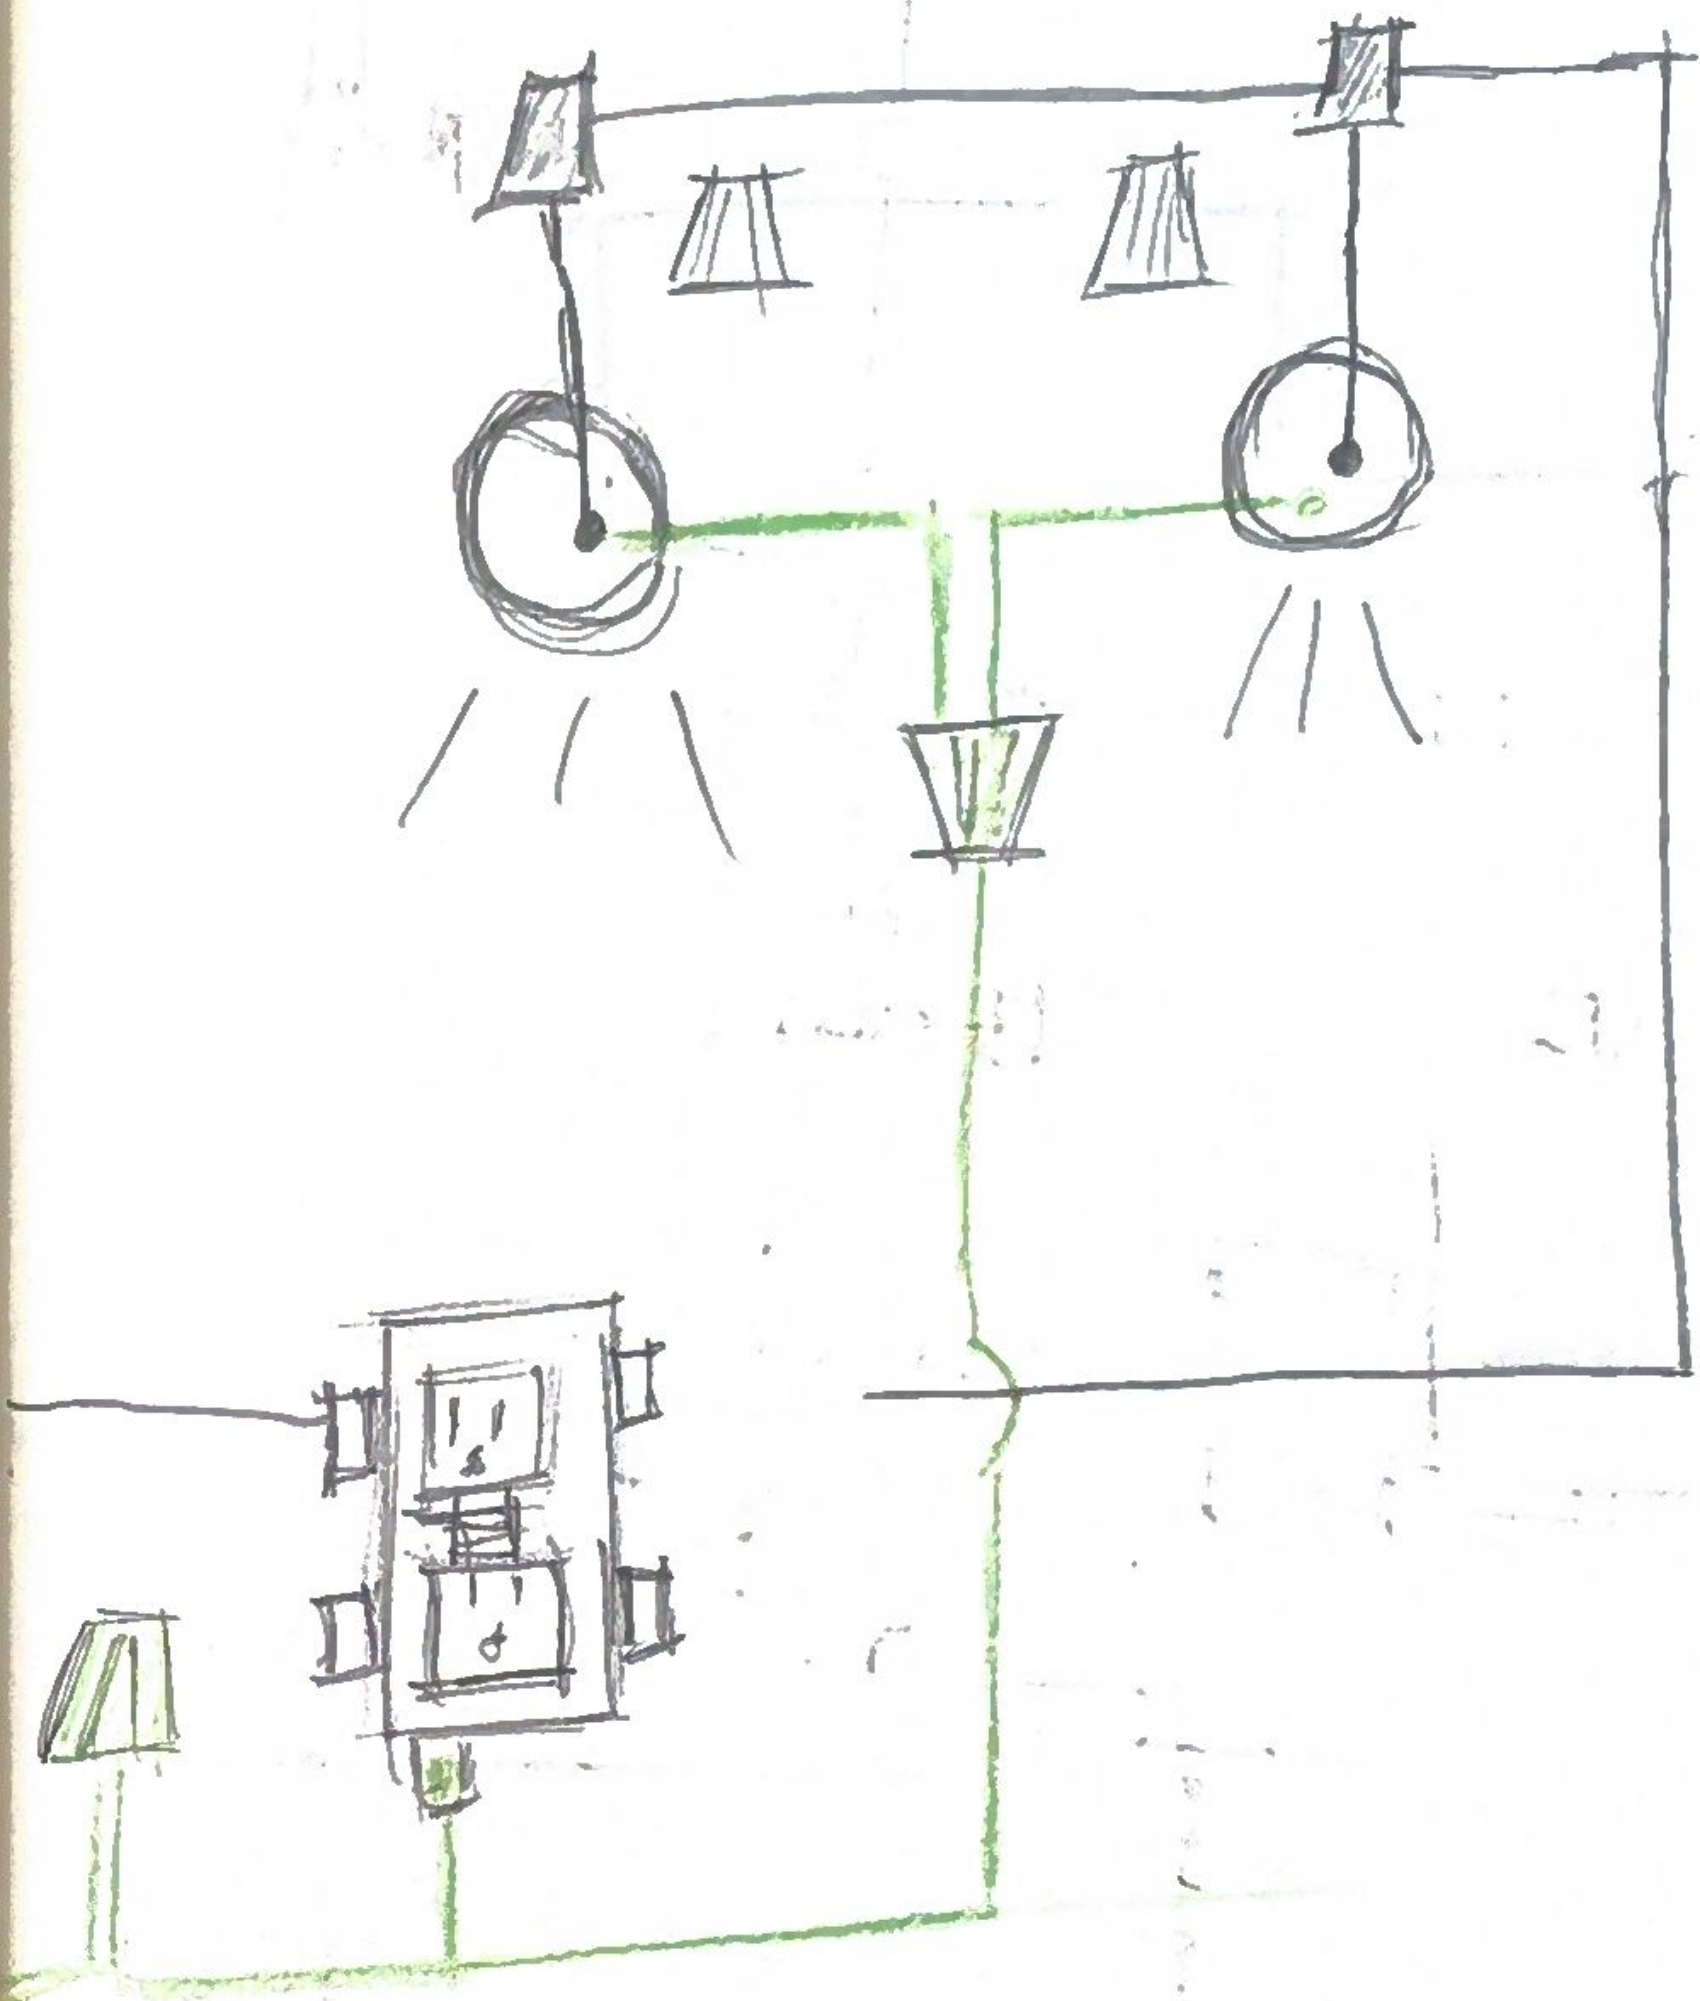

GUEST BATHROOM CIRCUIT DIAGRAM

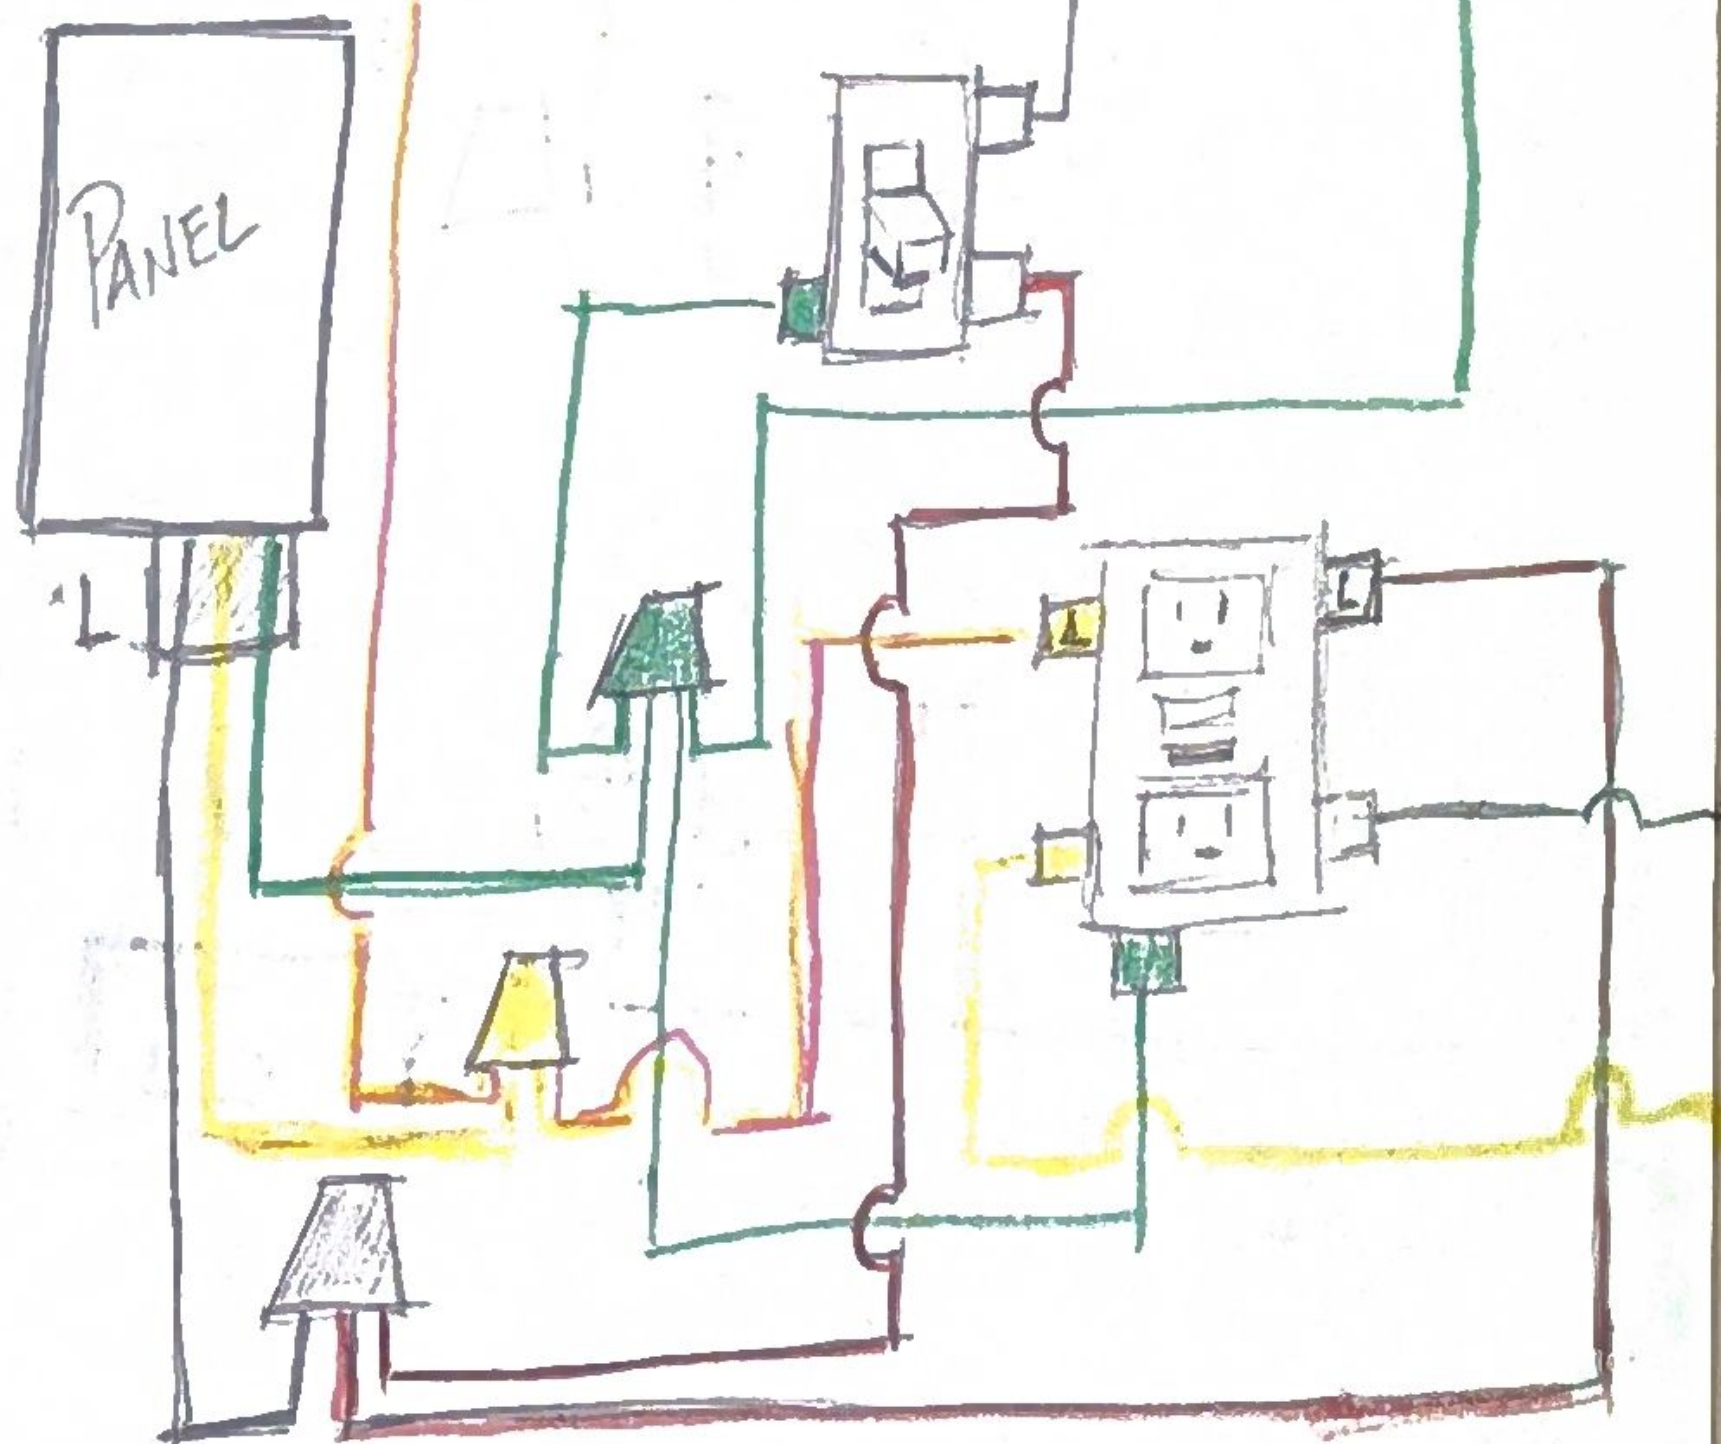


— = CURRENT HOT

— = CURRENT NEUTRAL



* L = LINE FROM PANEL

11-MARCH-2024

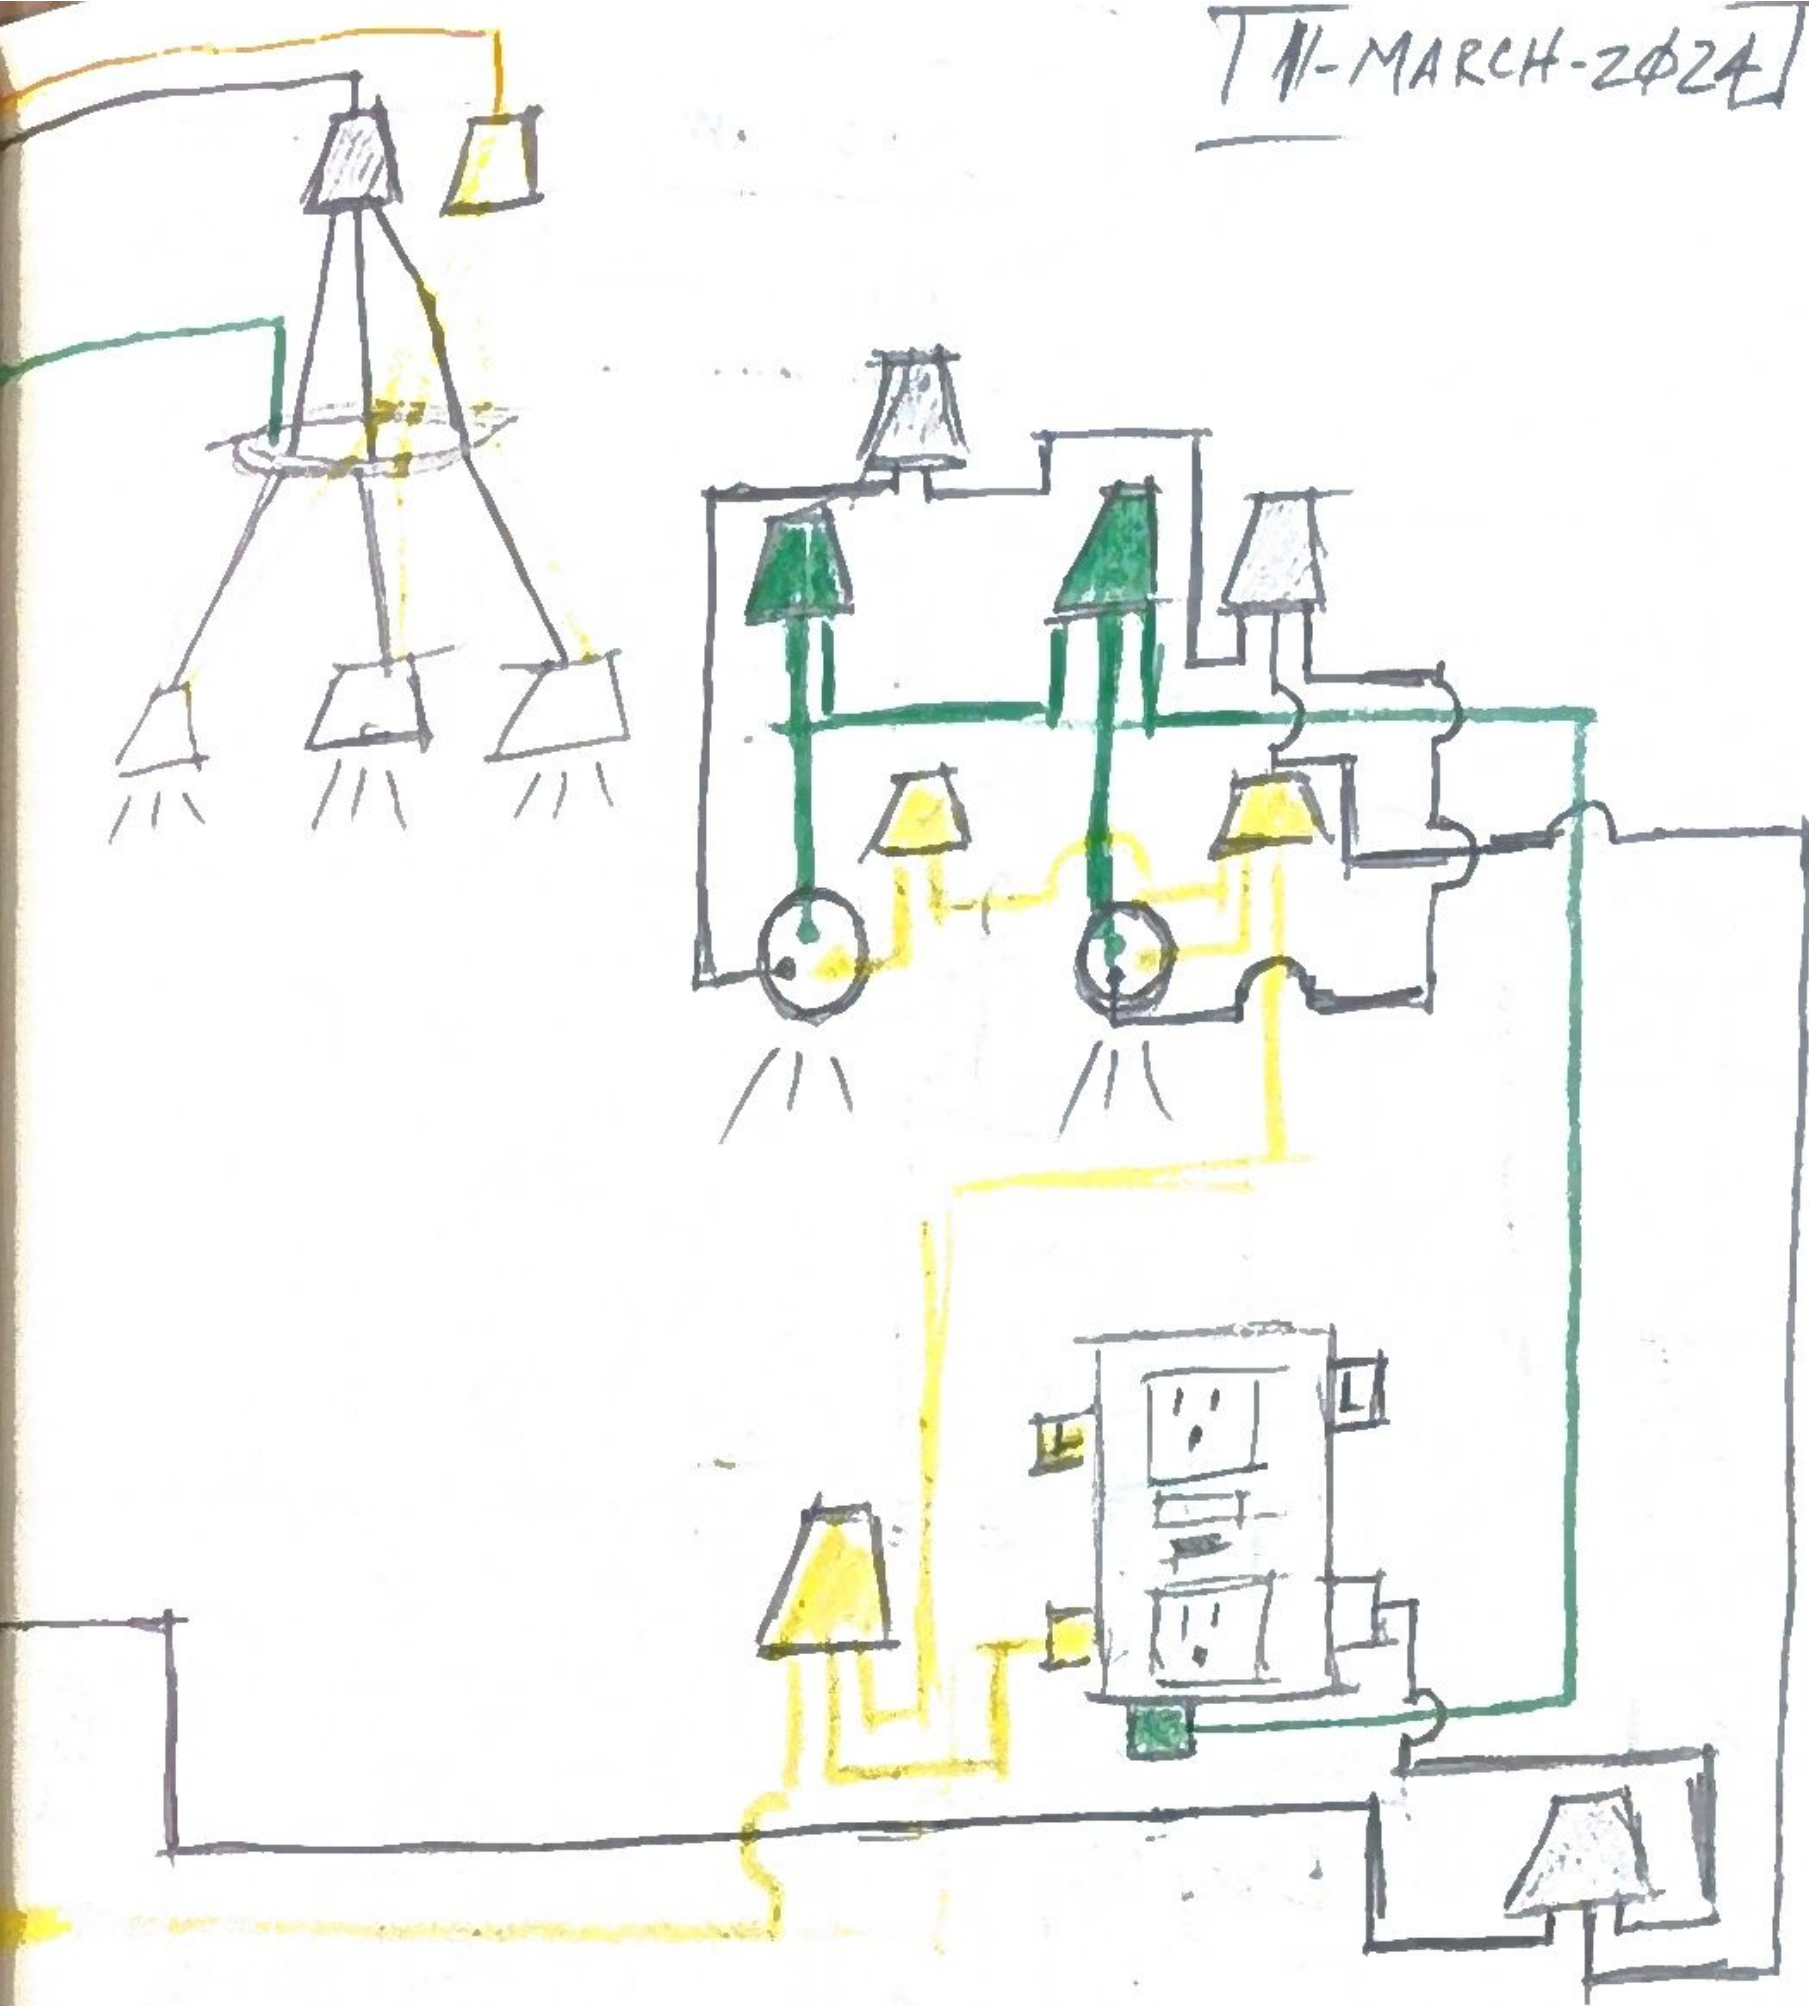


ISSUE 1: All CONNECTED → BREAKER "ON" = NO GO!
BREAKER
TRIPS

CONNECT L1
FROM PANEL
DIRECTLY TO
~~LINE~~ ON
GFCI/AFCI

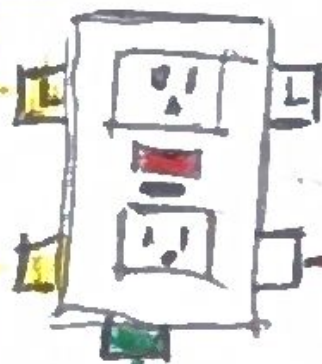
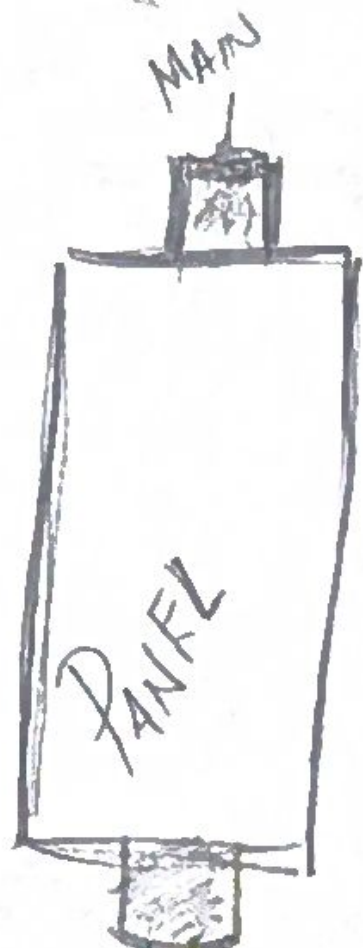



CHANGE
PIGTAIL
CONFIG

CORRECT
CONFIG

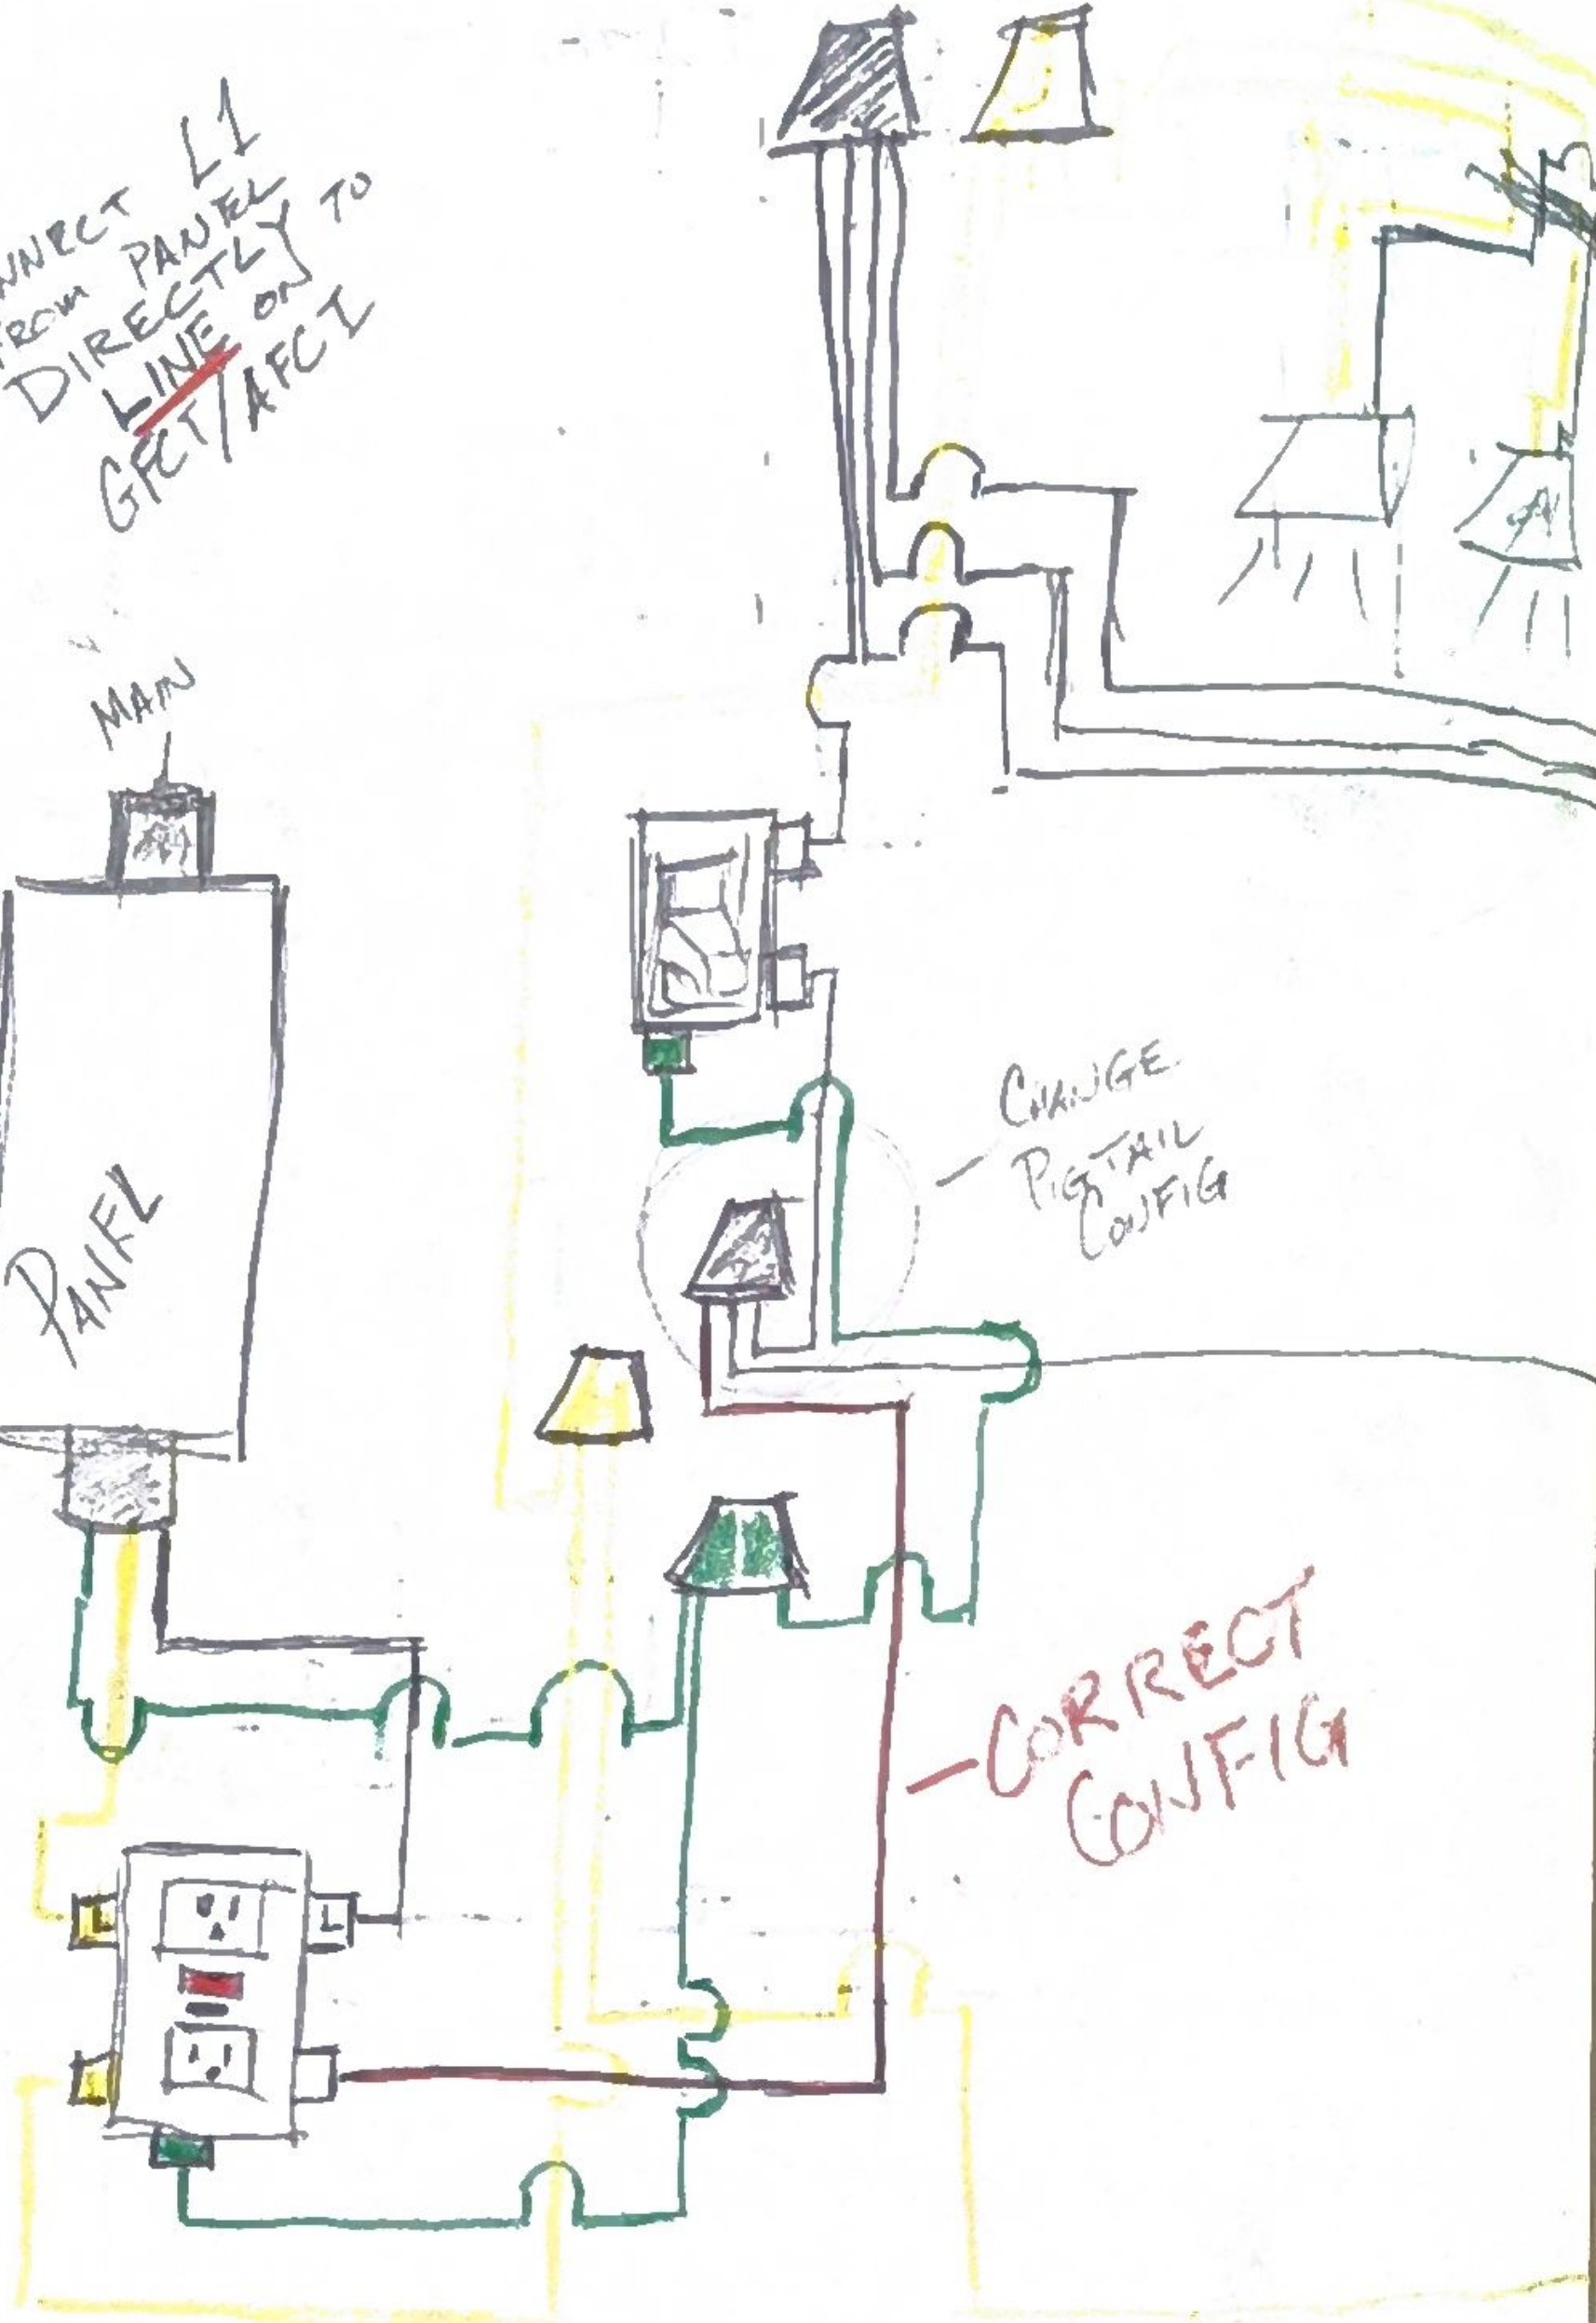


GUEST BATHROOM CIRCUIT DIAG

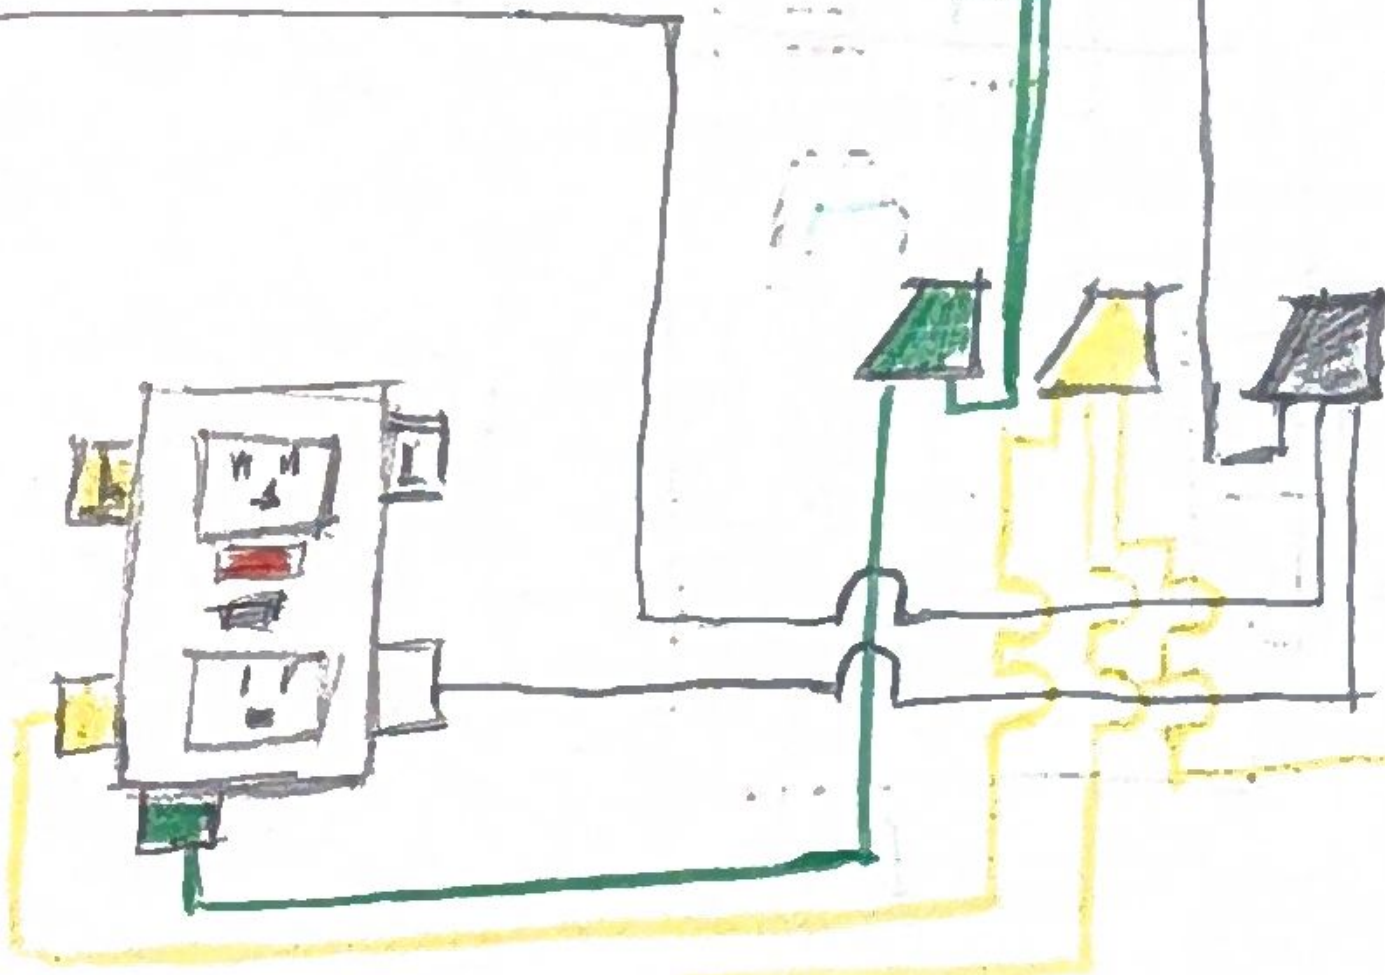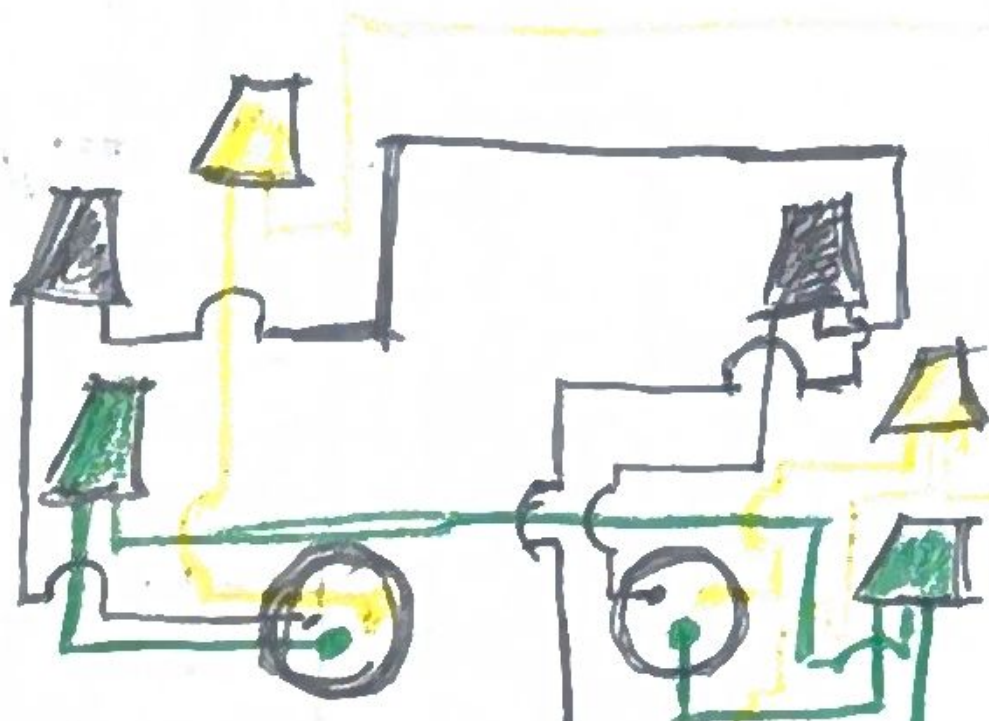


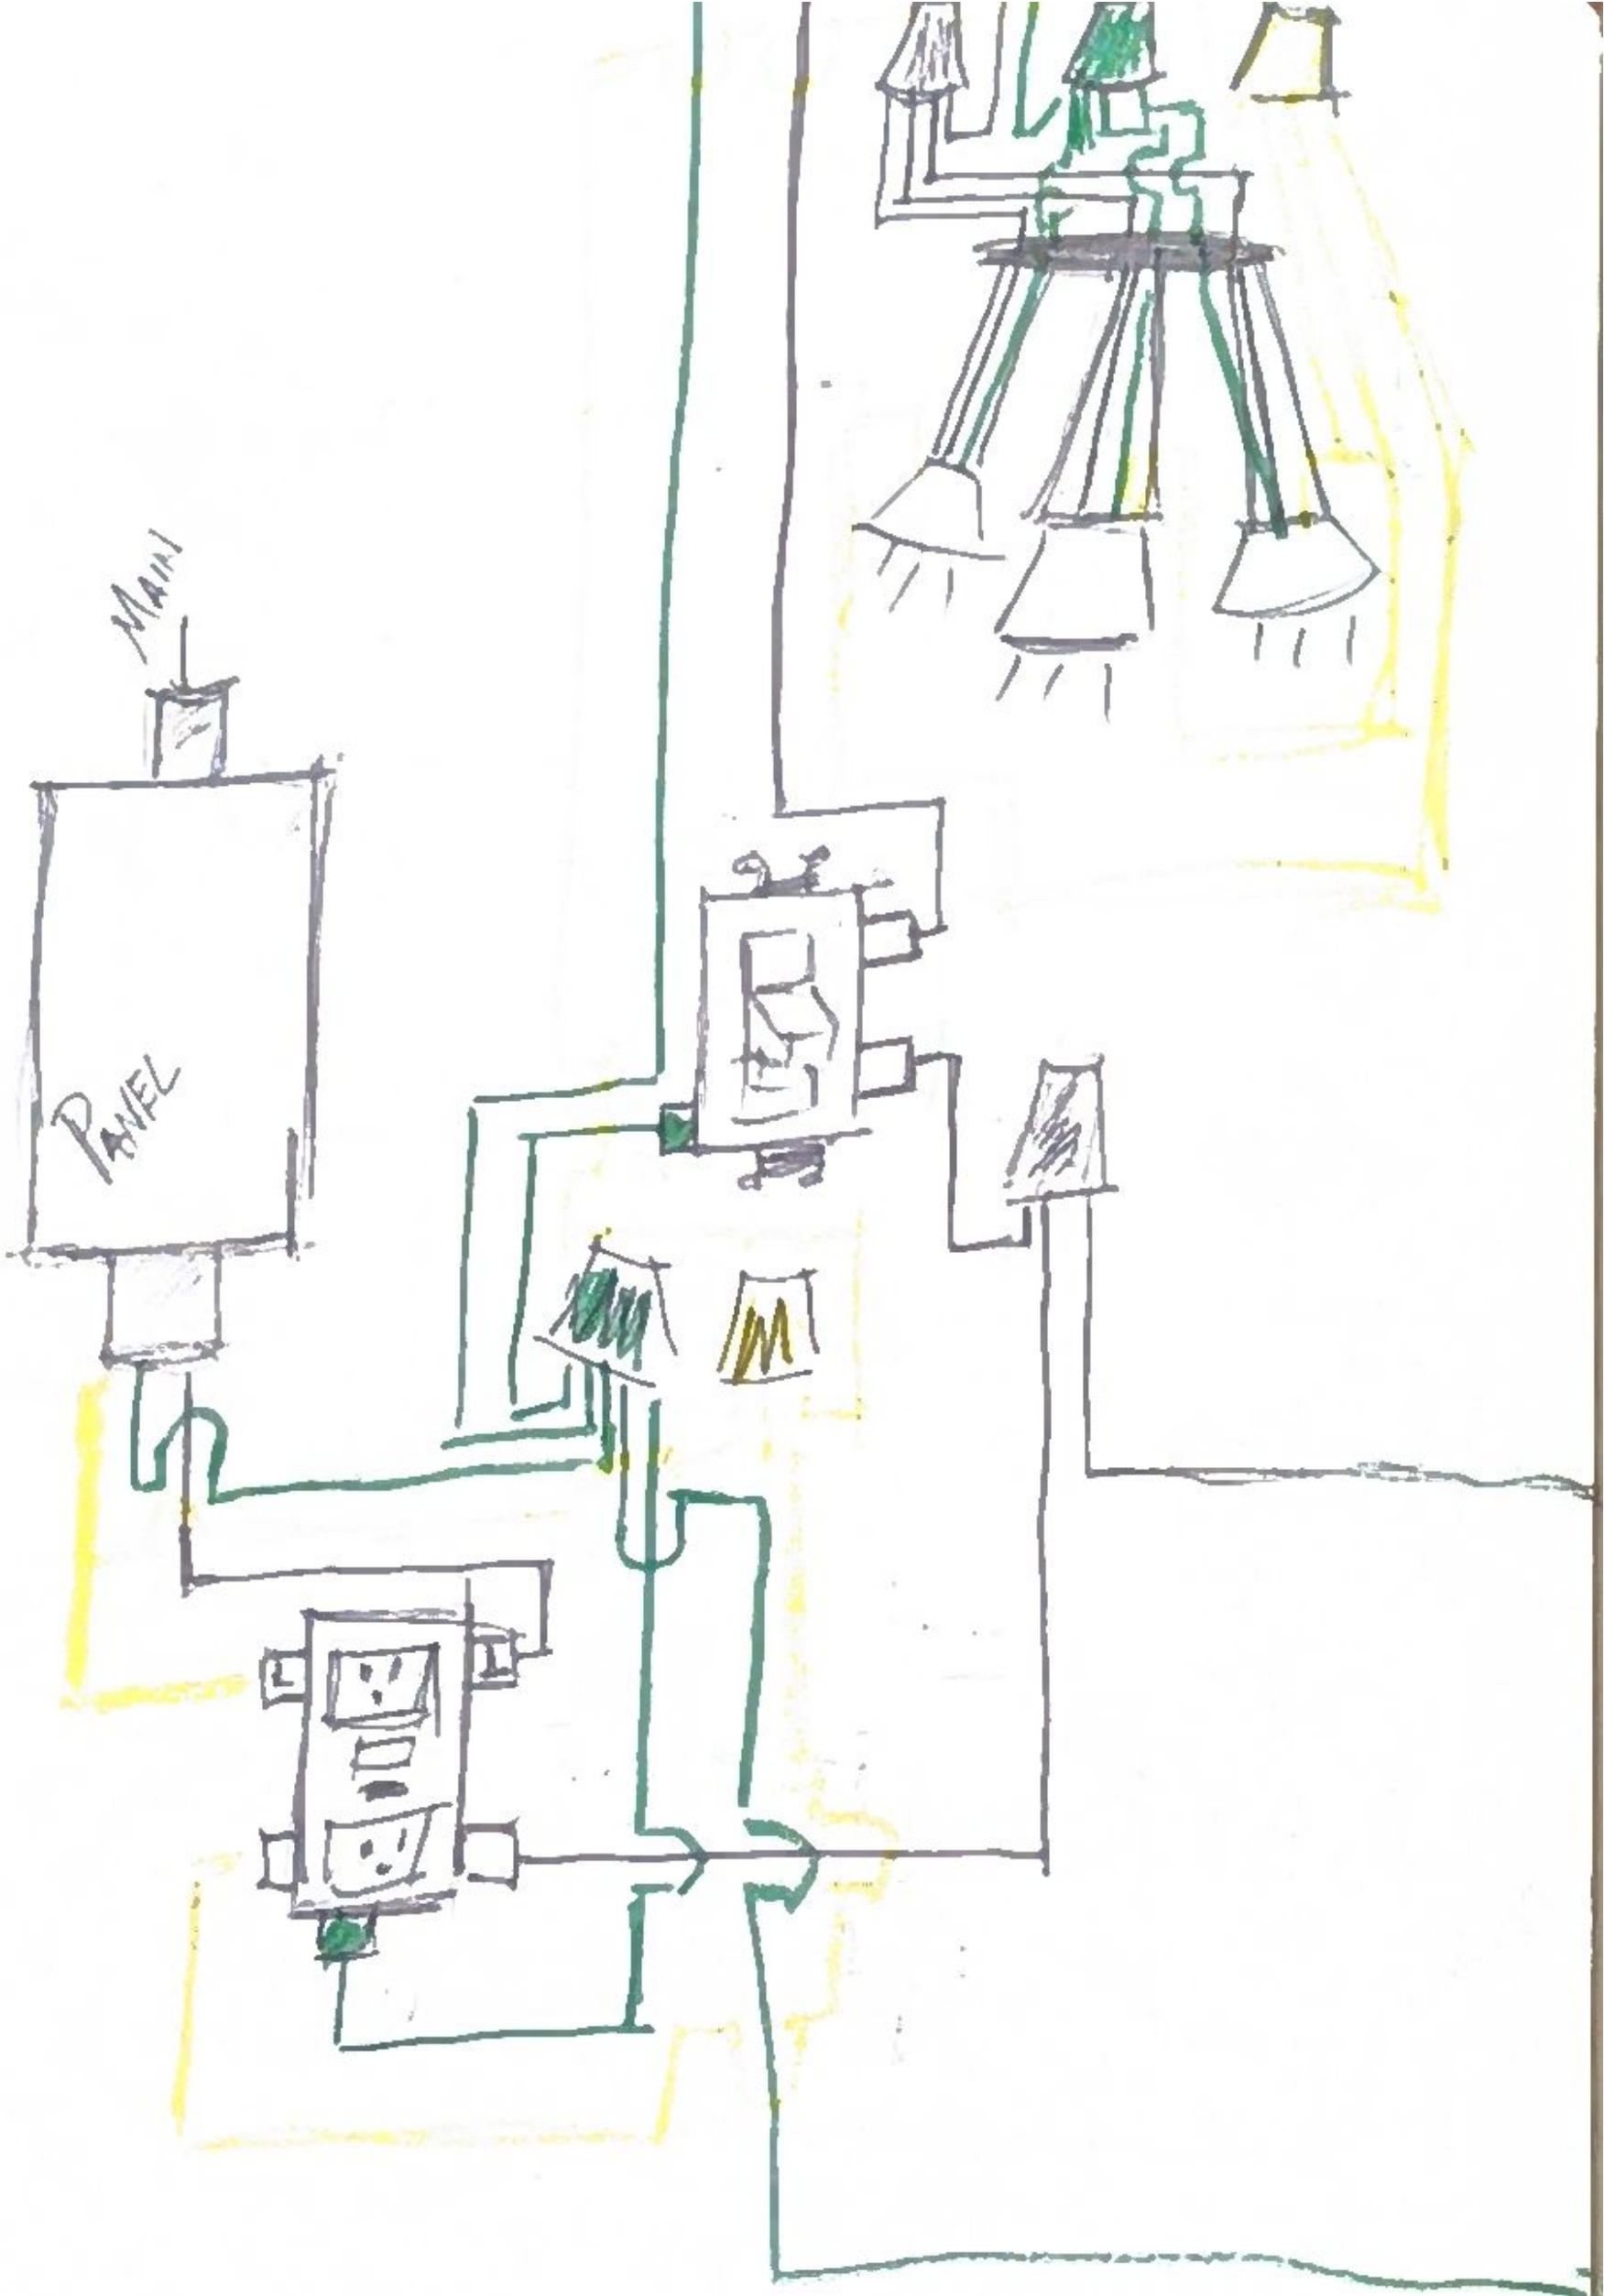

GUEST BATHROOM Circuit Diagram

12-MARCH-2024

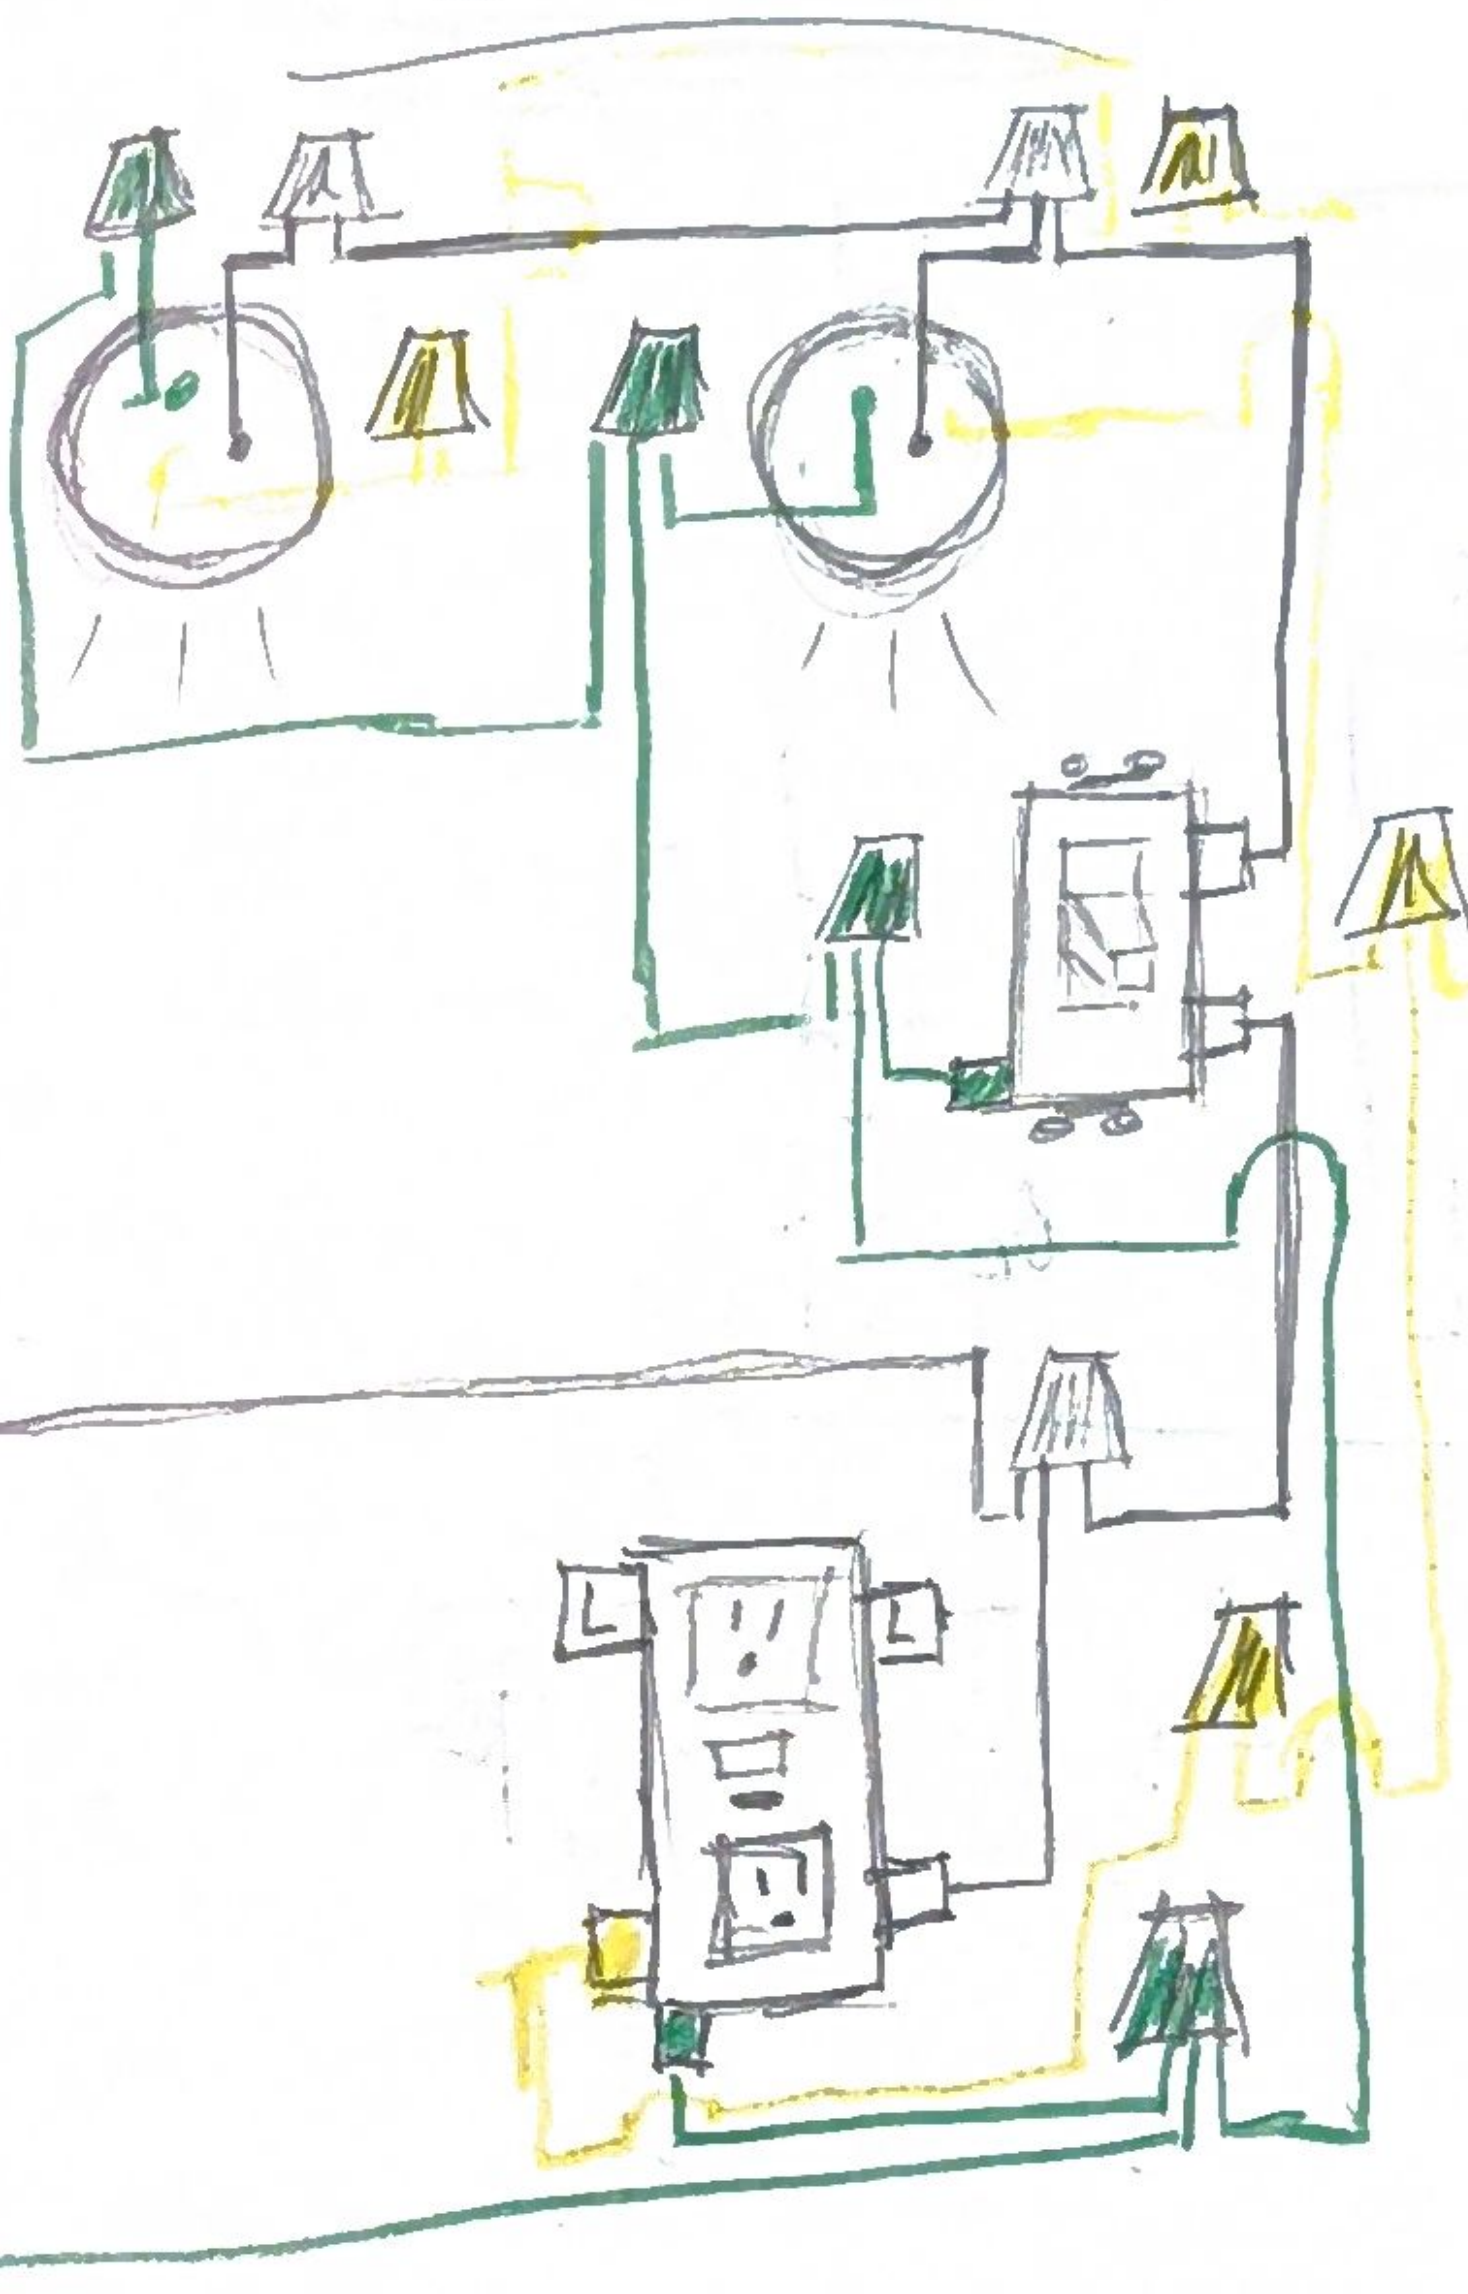

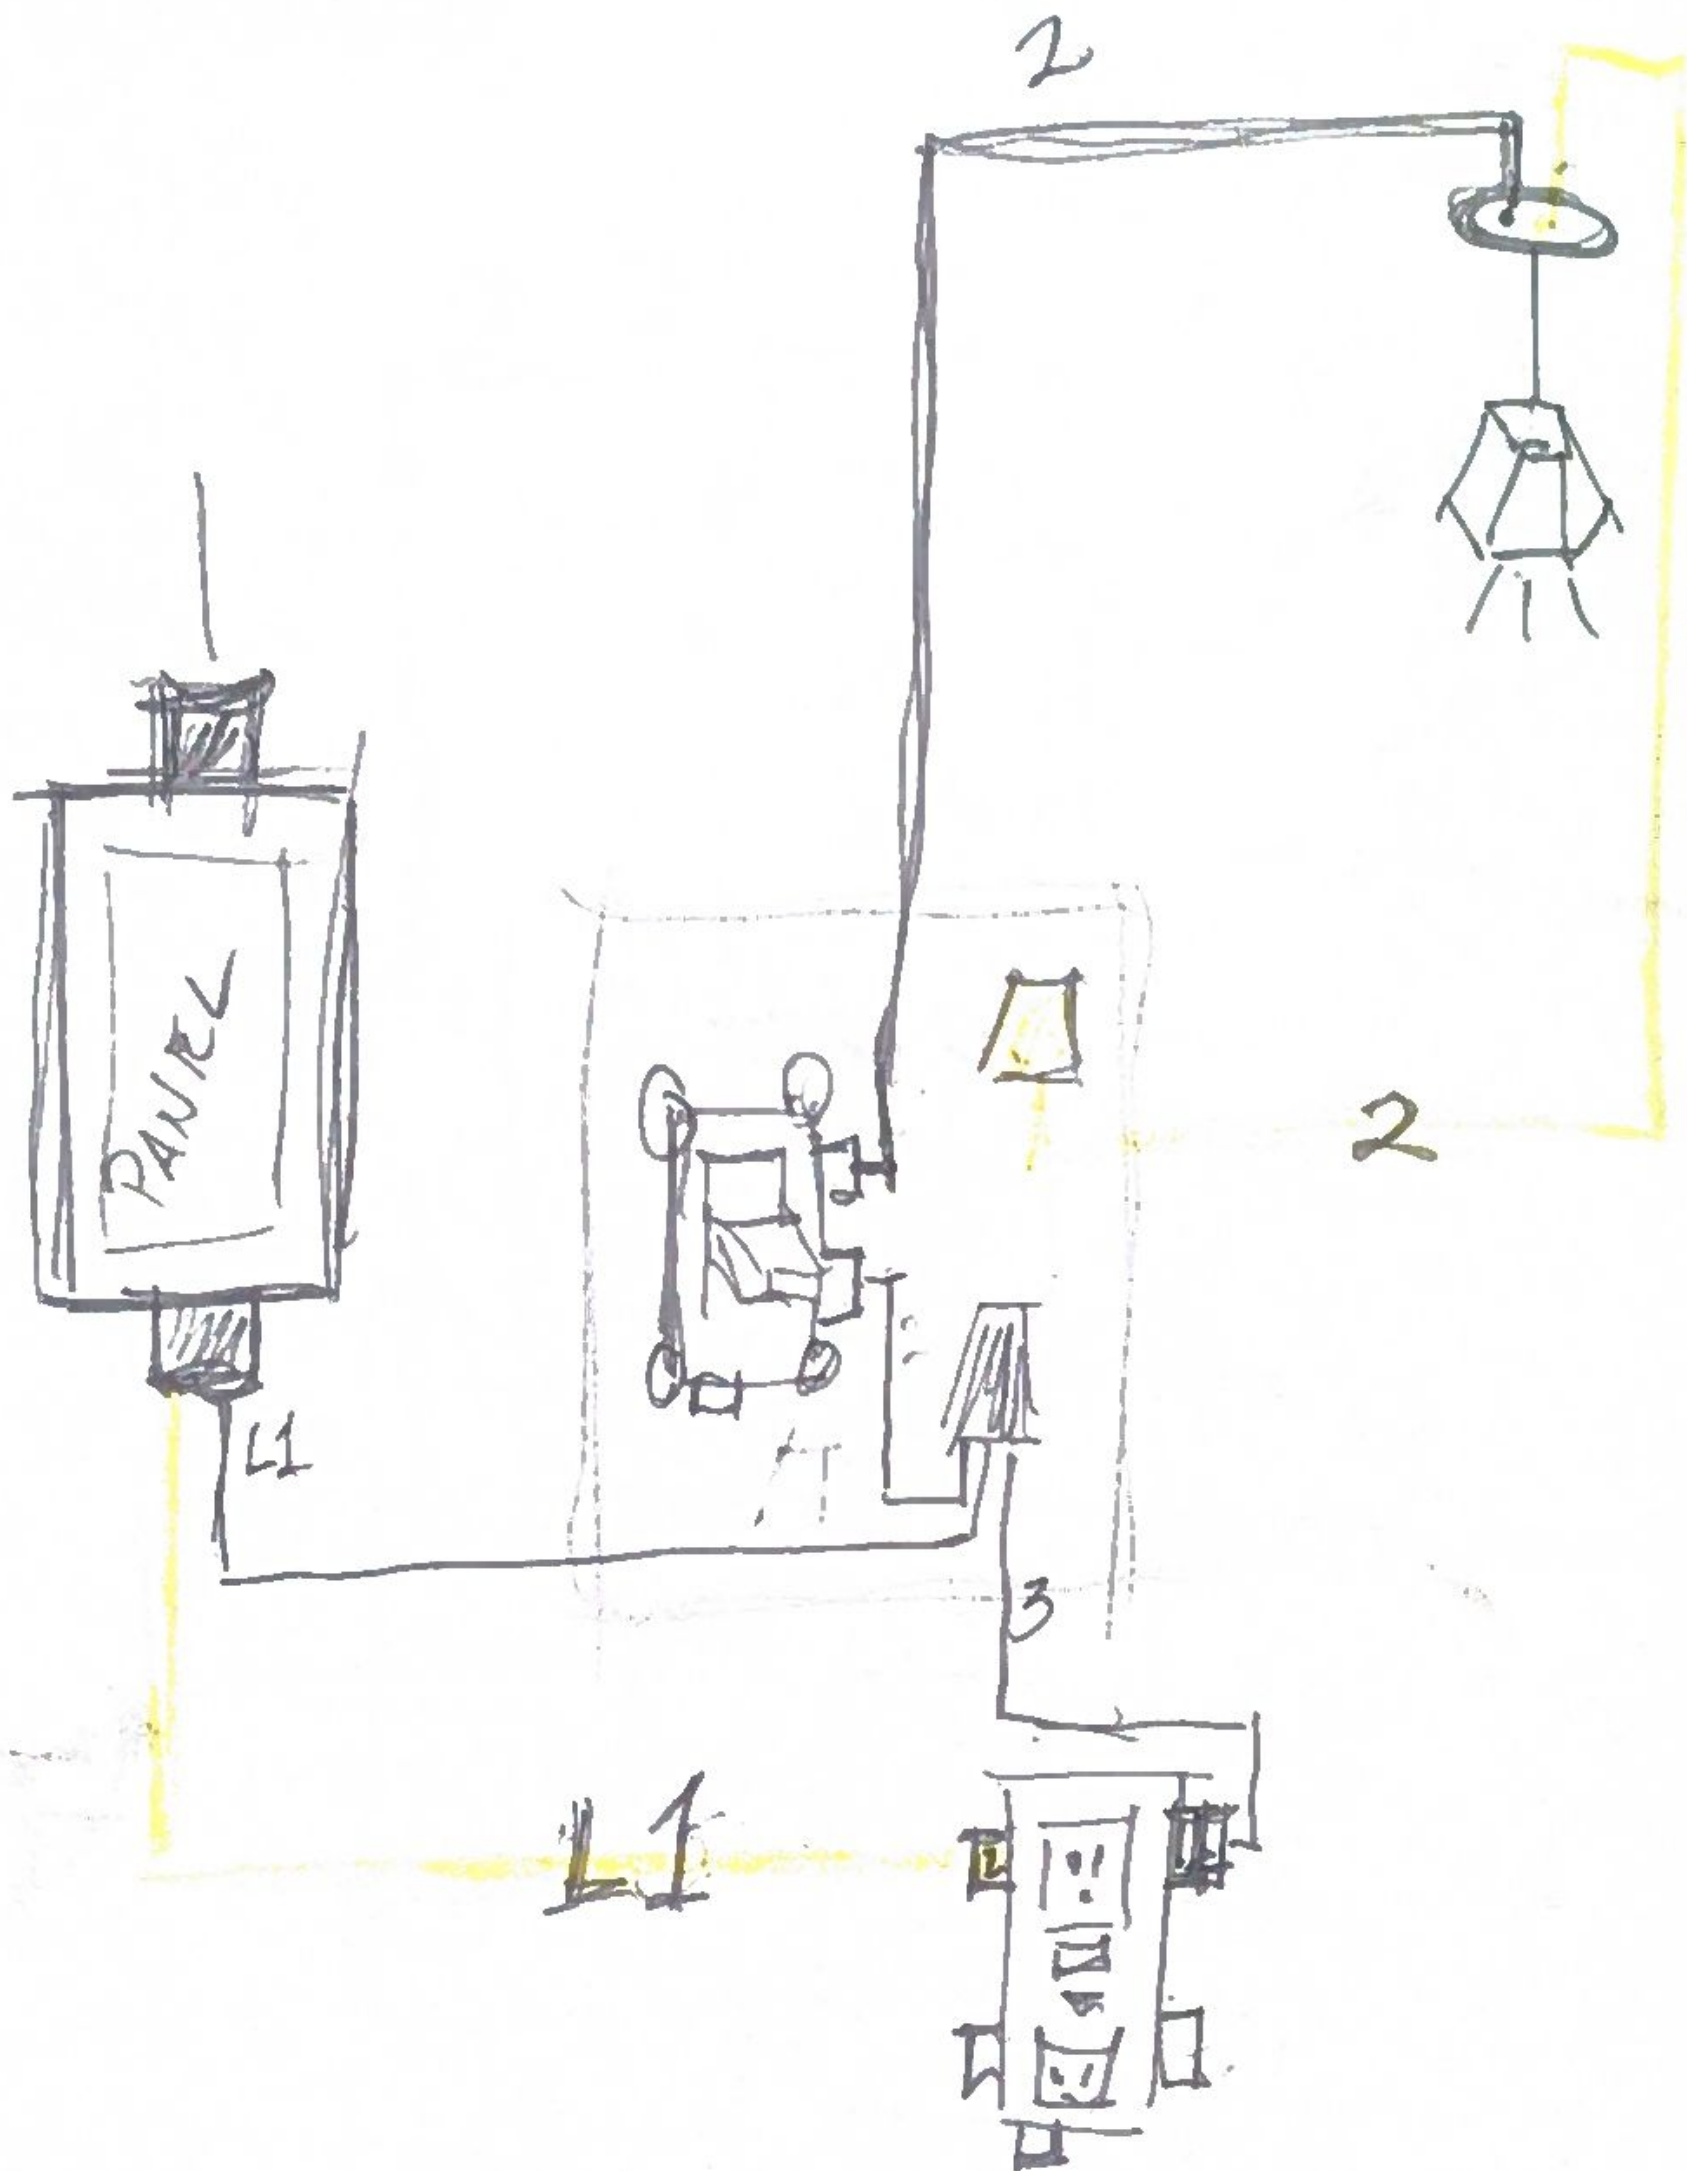

1 GUEST DATA
CIRCUIT DIAG

[23-MAR-2024]


GUEST BATH -


	<u>H</u>	<u>W</u>	<u>D</u>	<u>DR</u> OUTSIDE EDGE TO CENTER
<u>SINK</u>	6"	21 $\frac{1}{8}$ "	17"	8"
<u>VANITY</u>	33 $\frac{1}{4}$ "	41 $\frac{1}{2}$ "	21 $\frac{3}{4}$ "	13 $\frac{1}{8}$ " TOP DEPTH

VANITY

14-APRIL-2024


24" x 16"
H W

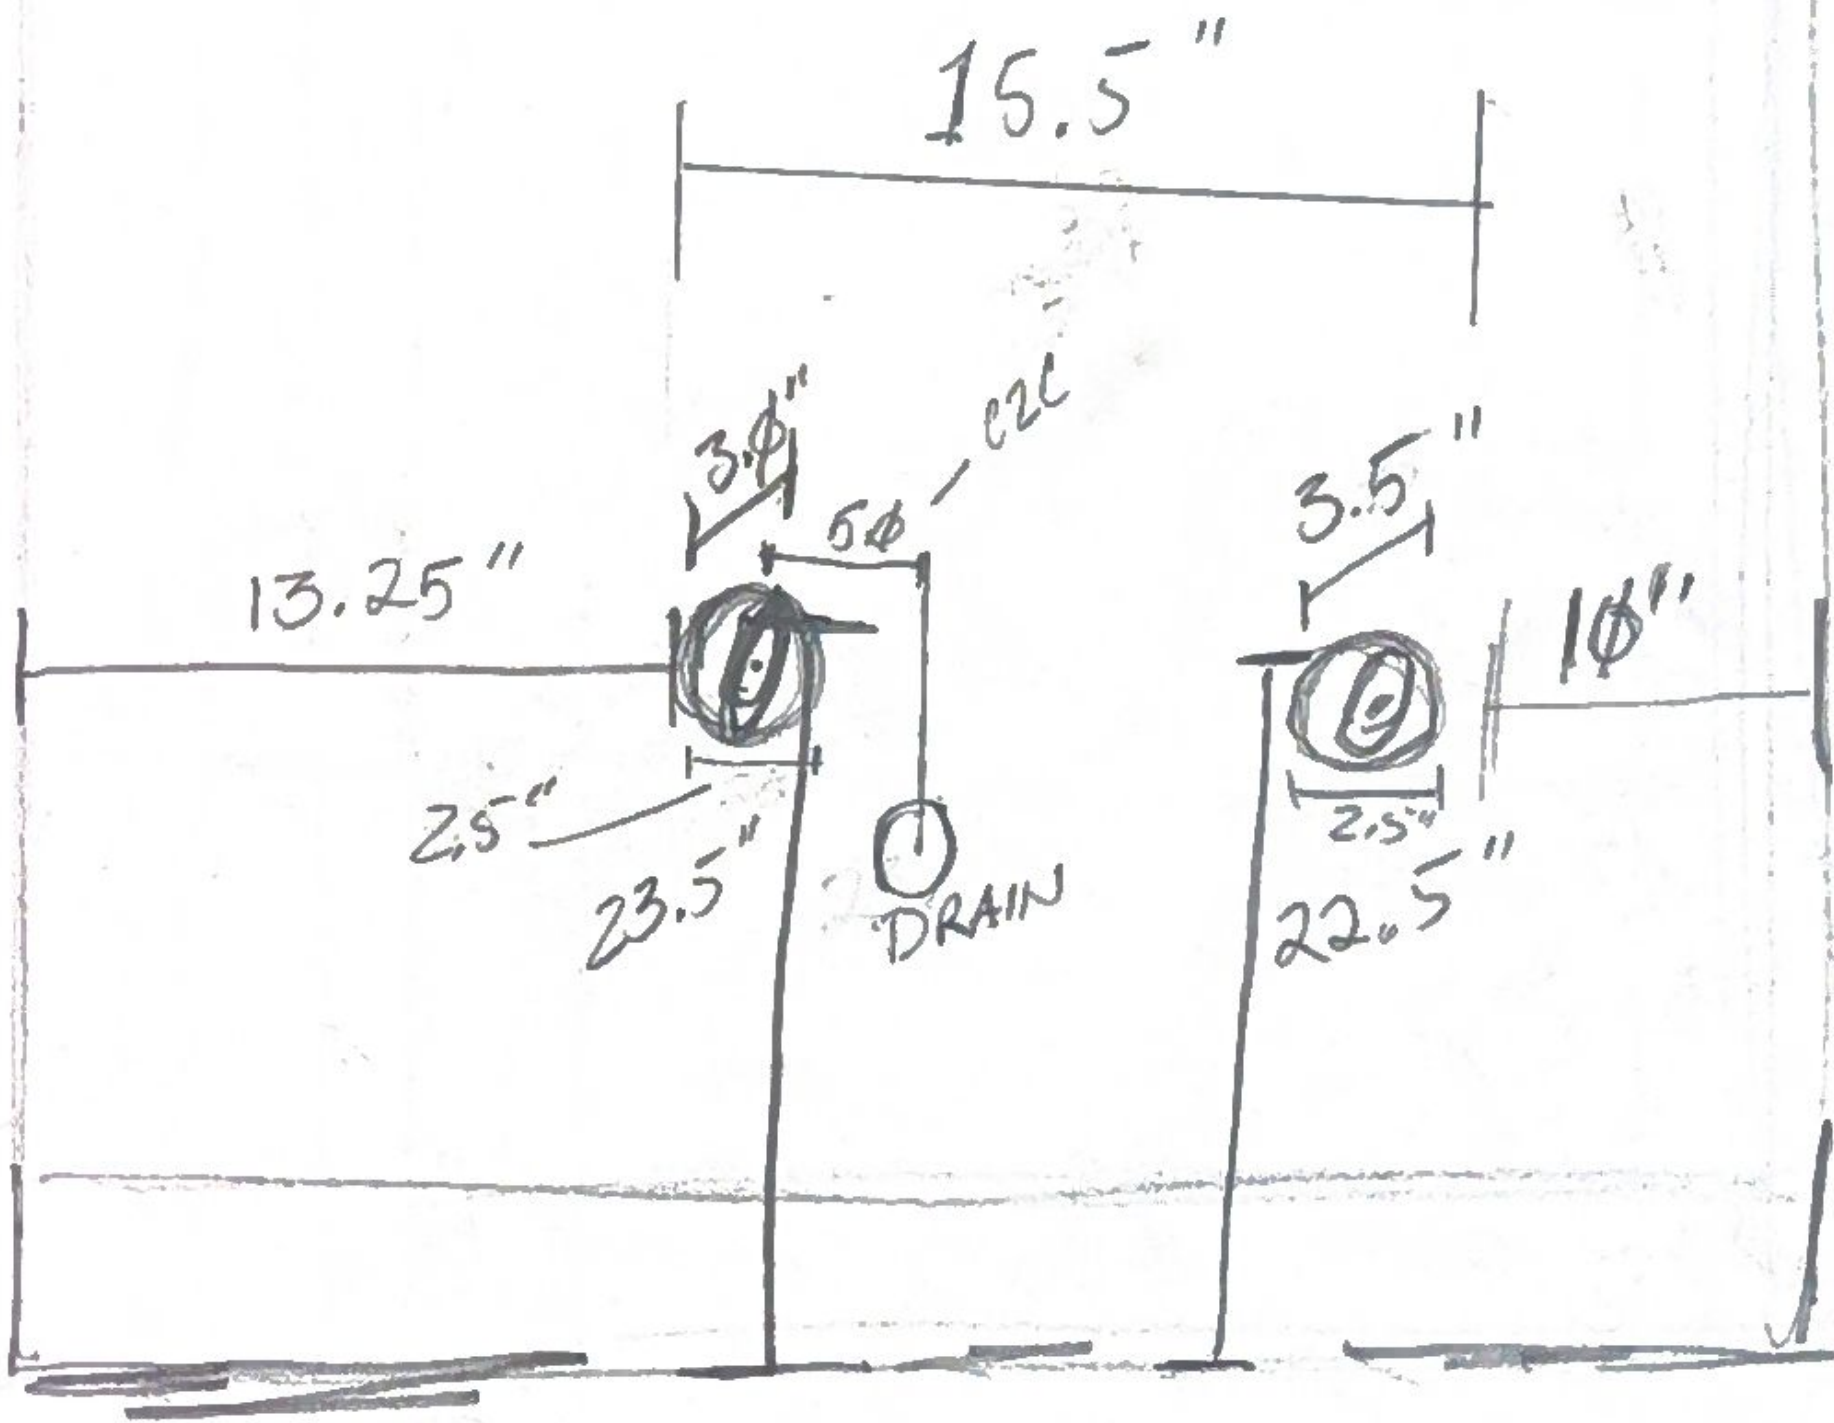

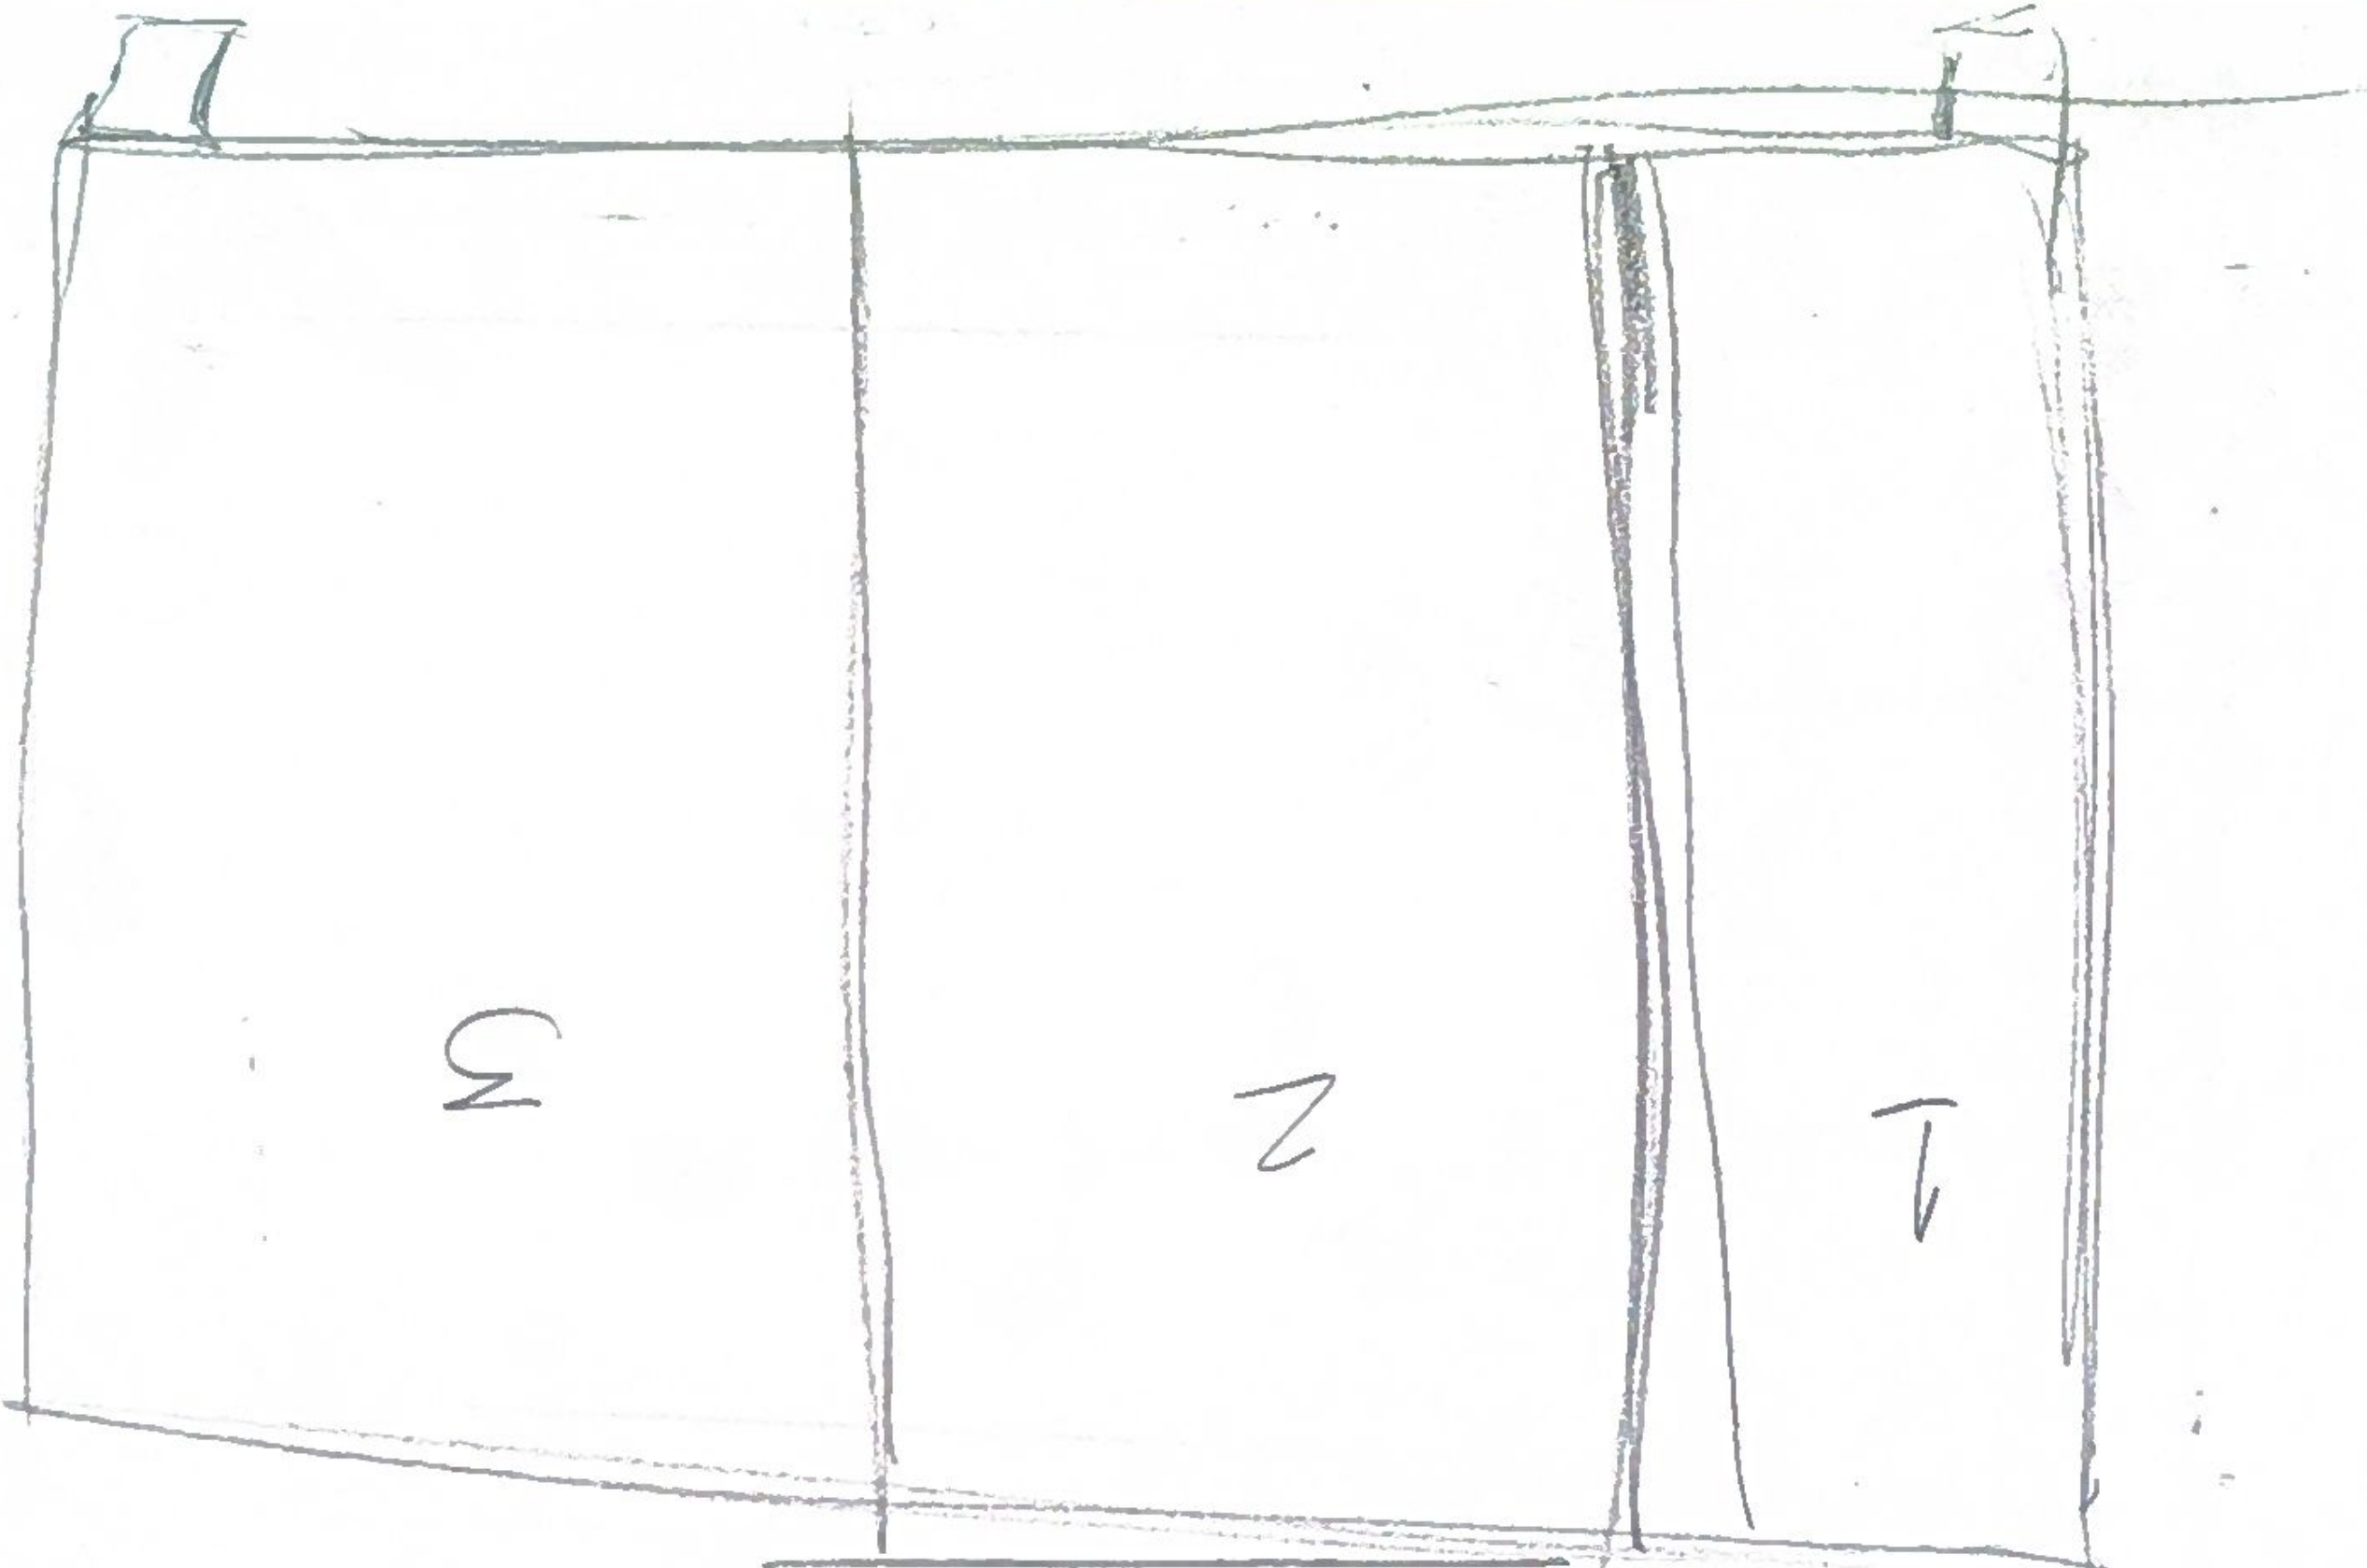


VANITY - BACK SIDE


VANITY, - TOP DRAWER

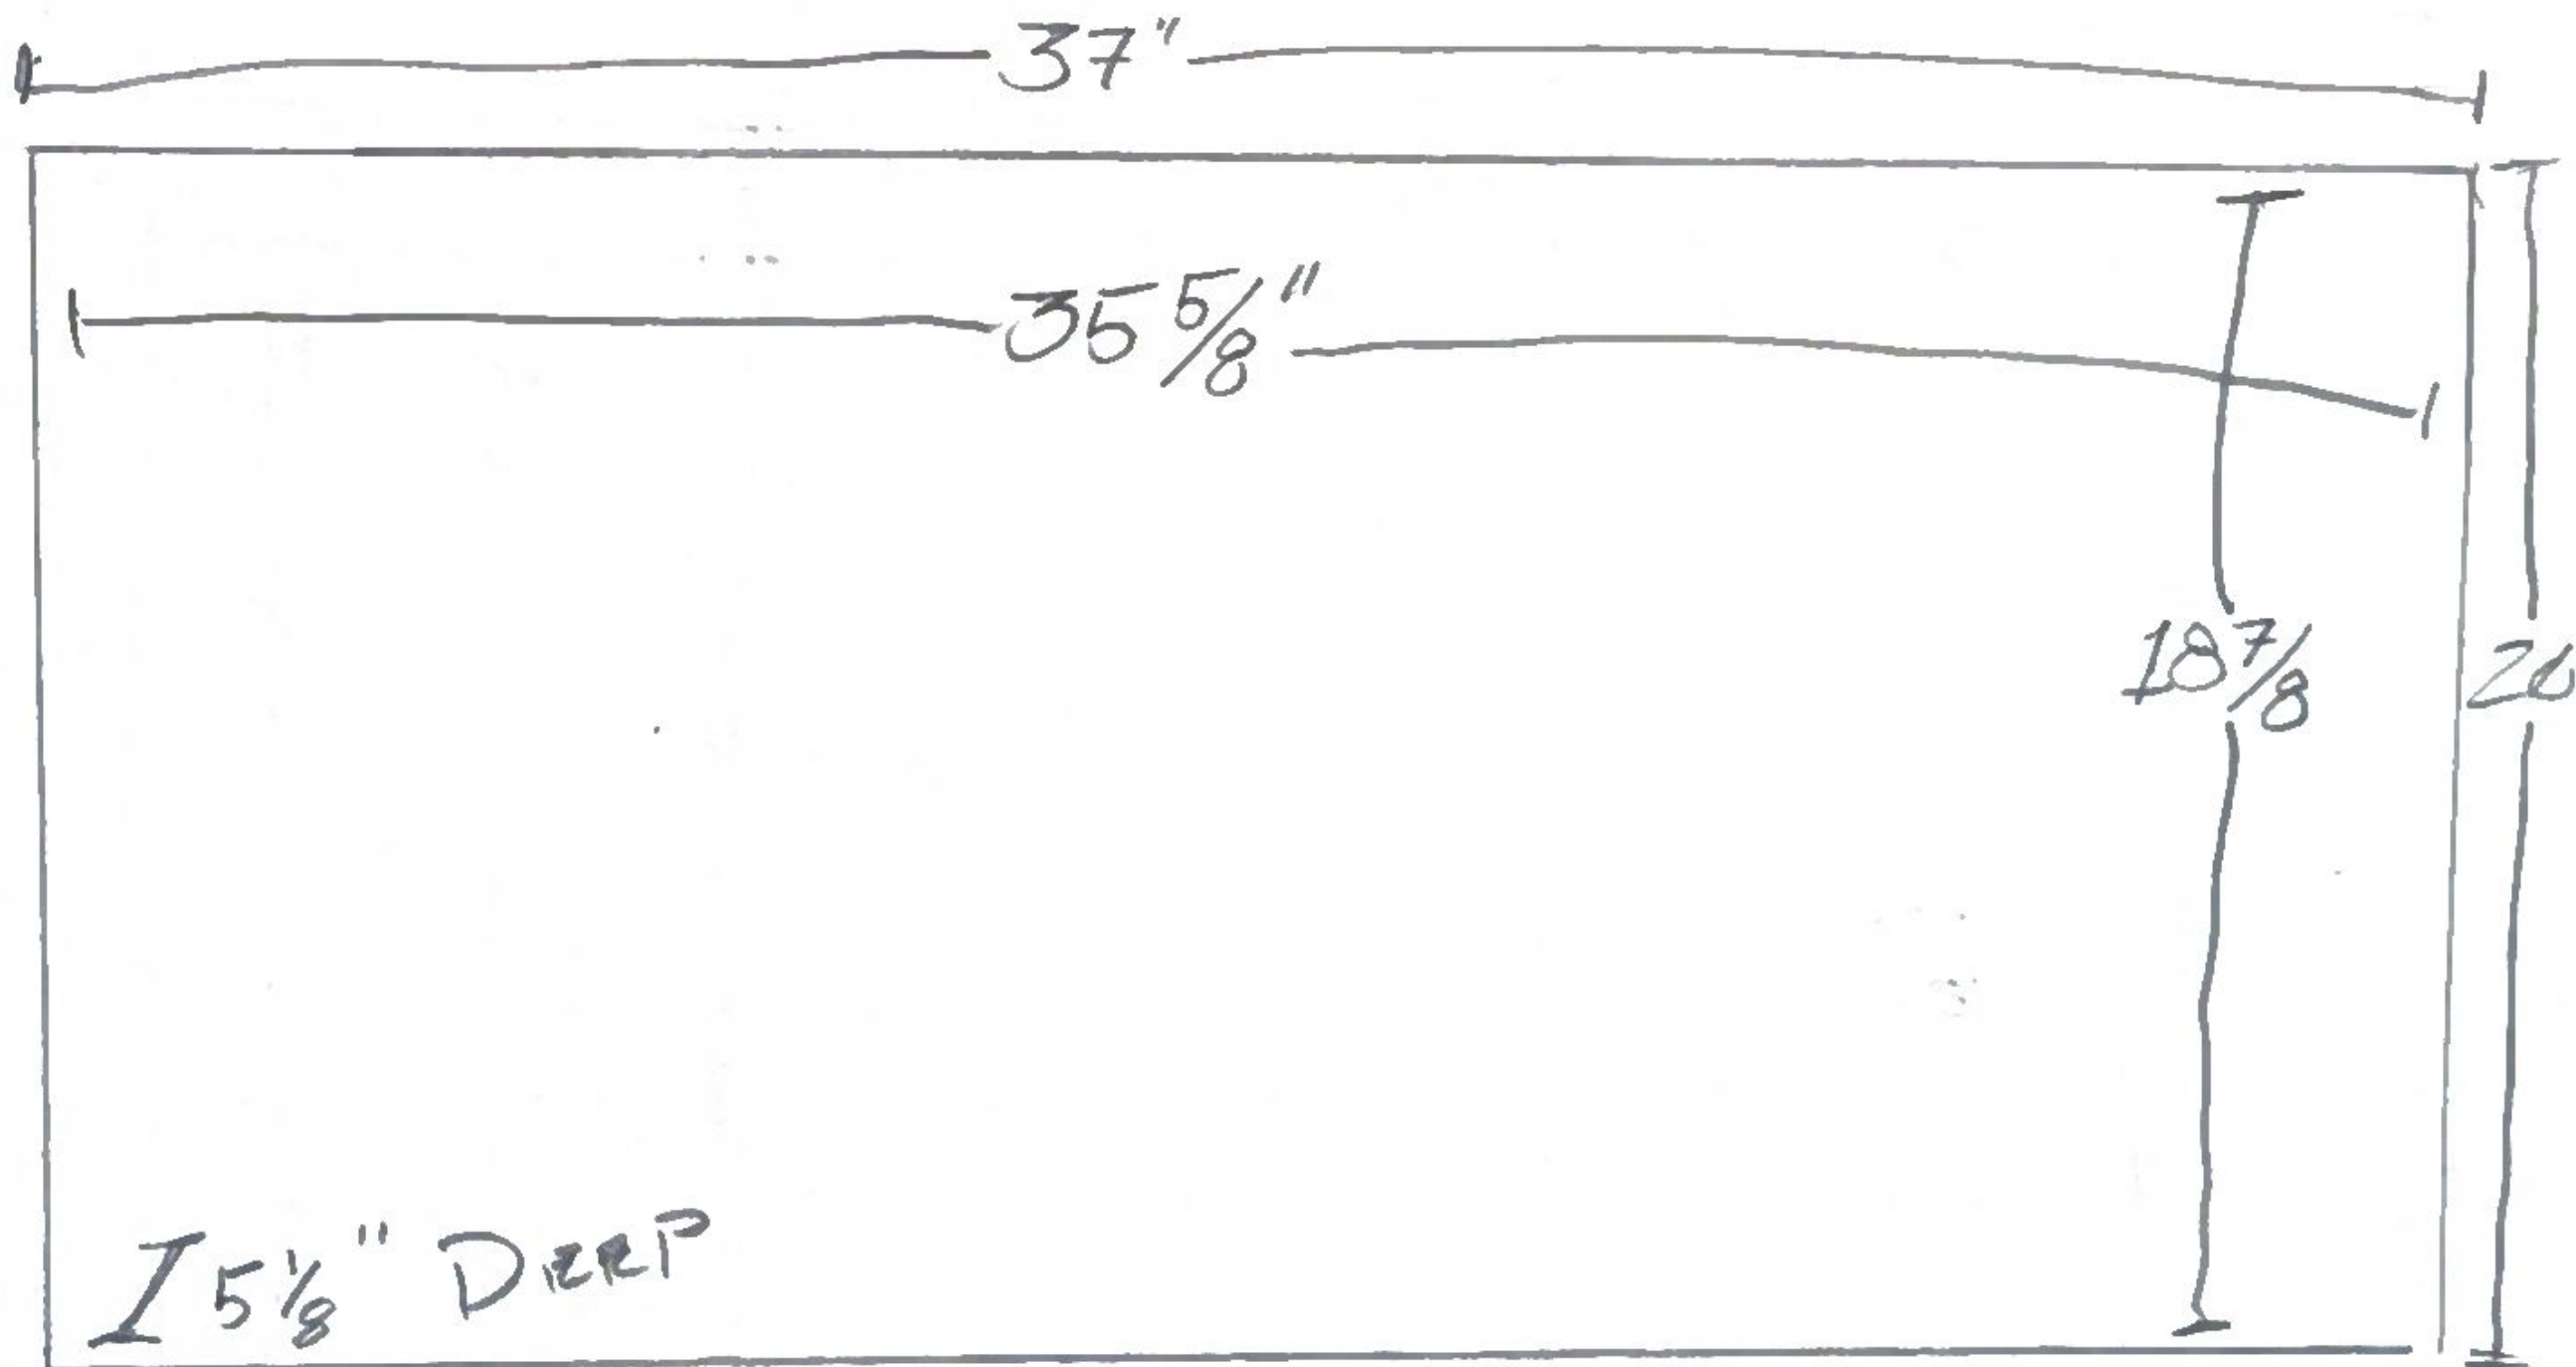

VANITY - MIDDLE DRAWER (#2)

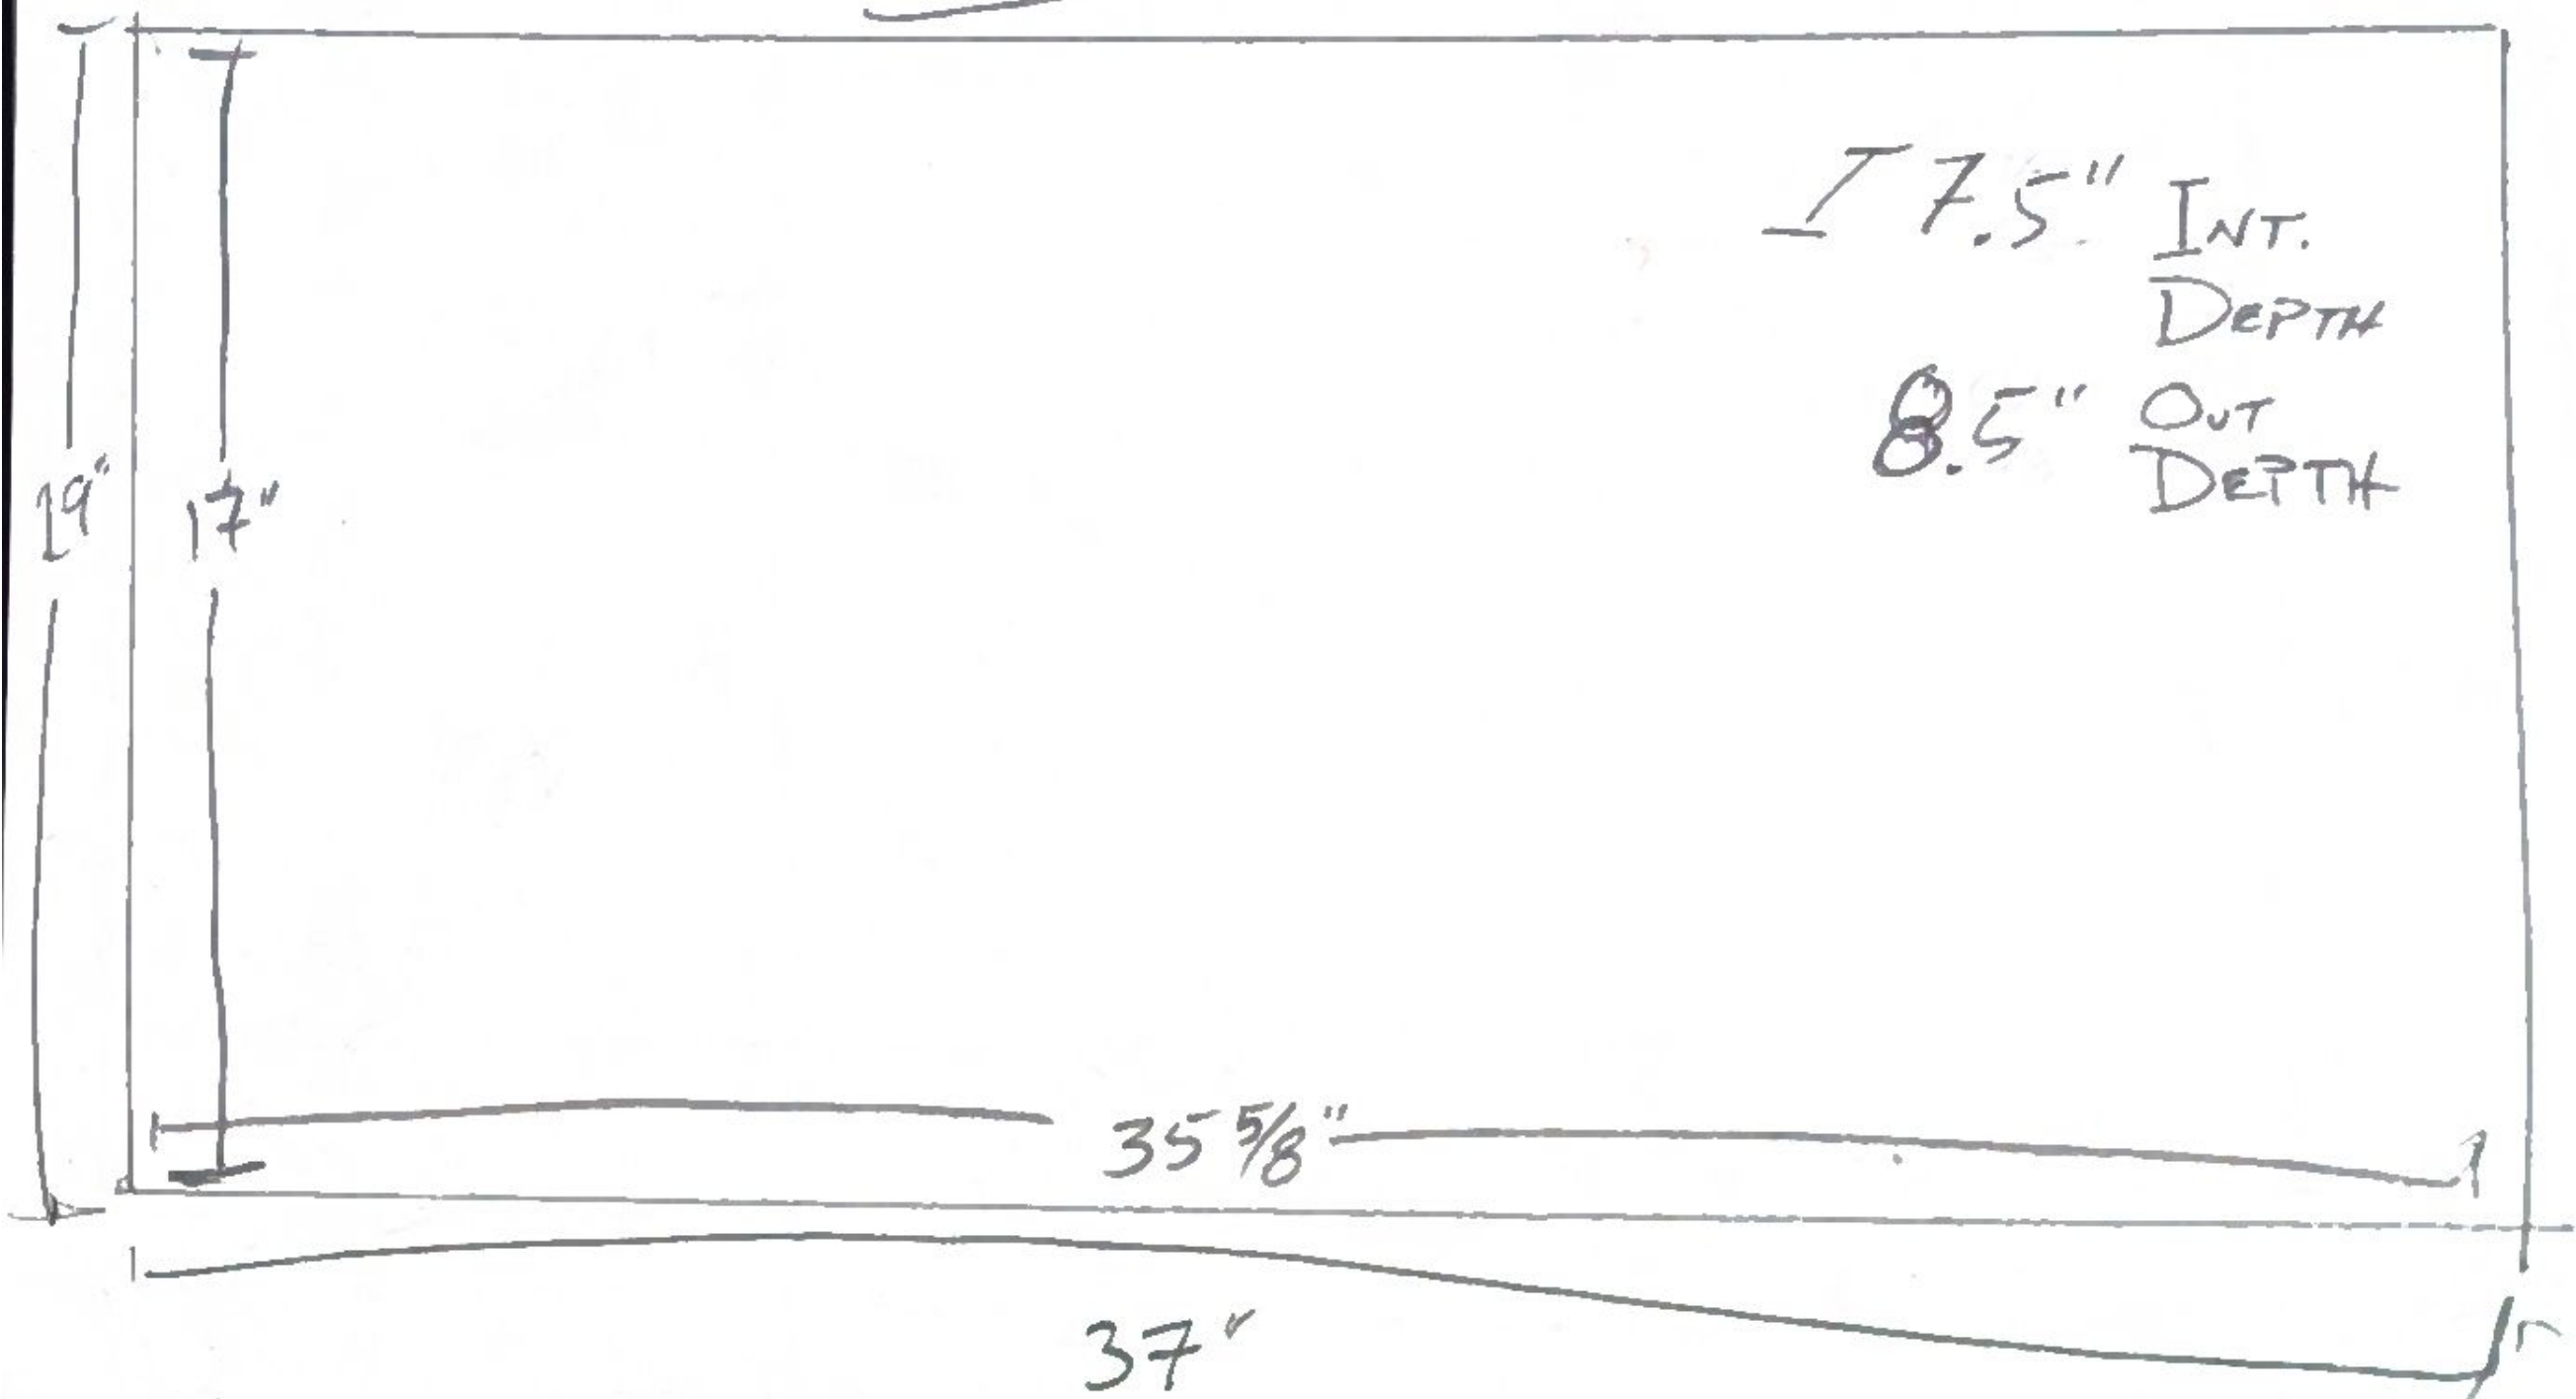

VANITY - BOTTOM DRAWER (#5)

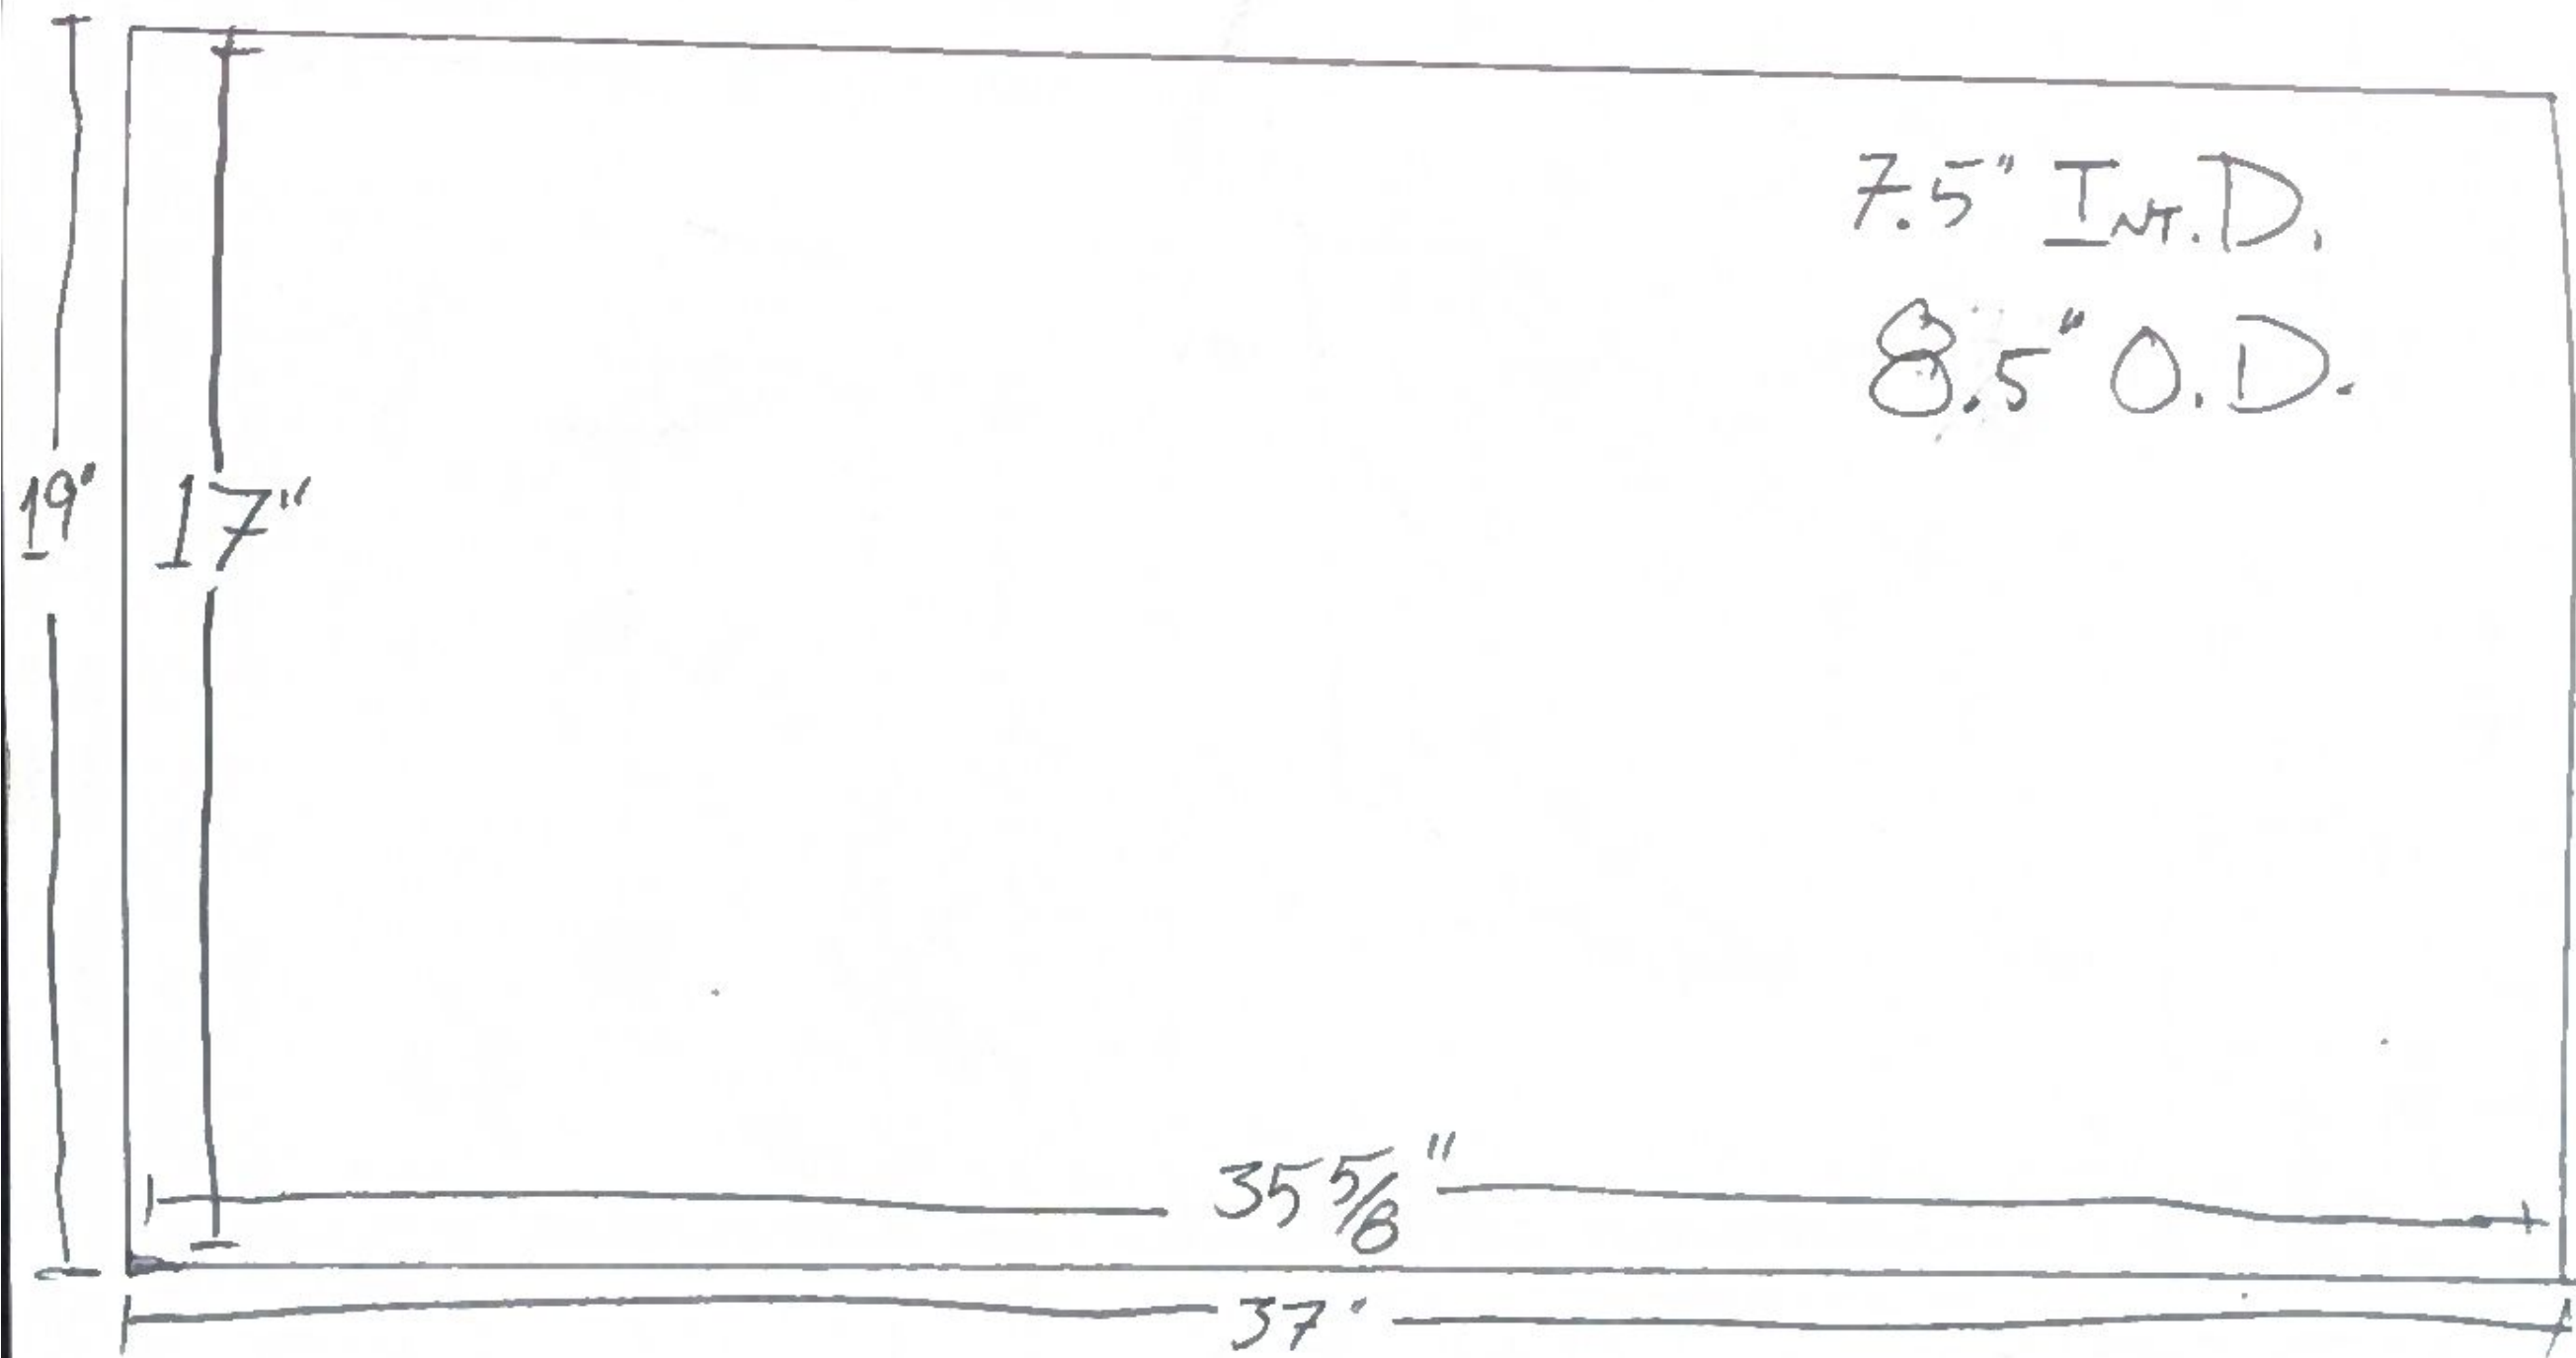

GUEST D+H
TOP DRAWER

18-APRIL-2024 I



INSERT

3.25" H

1.75" THICK

~~16~~" 15" L

19" W

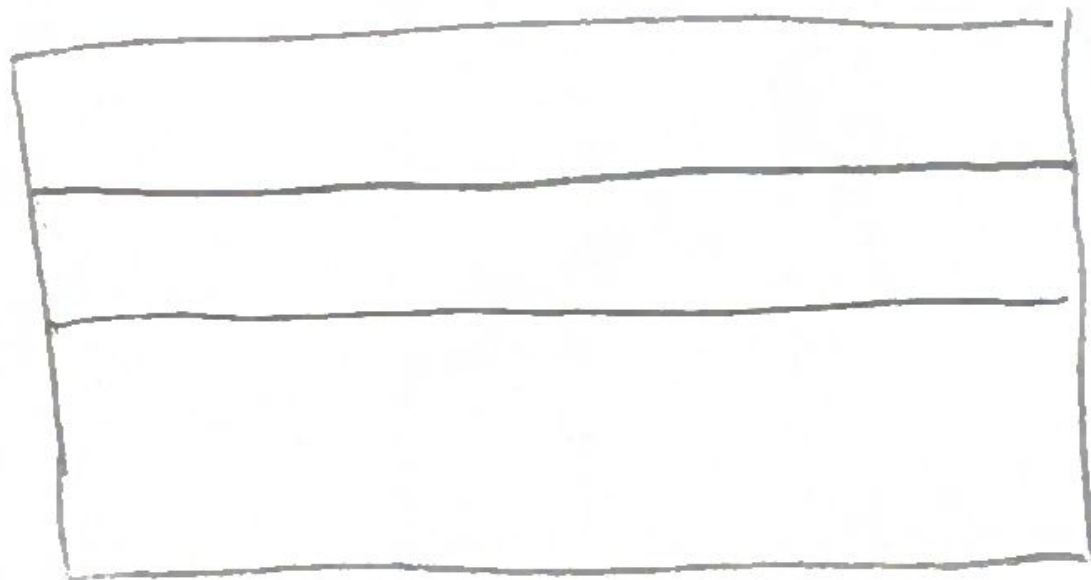
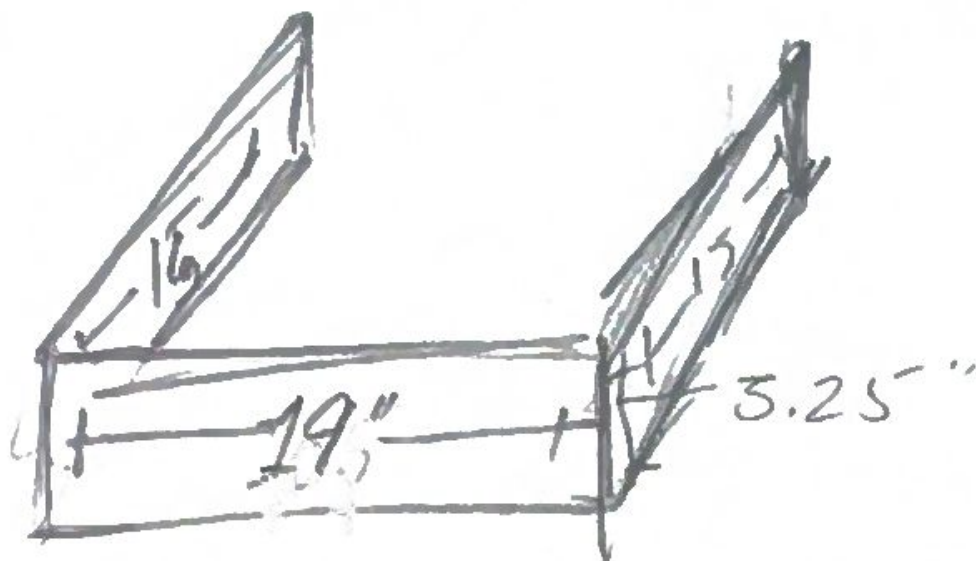


FRONT 1x | 18 13/16 W x 7 5/8" H

SIDES 2x | 14 11/16" L x 7 5/8" H

GUEST BATH
MIDDLE DRAWER


[12-APRIL-2024]

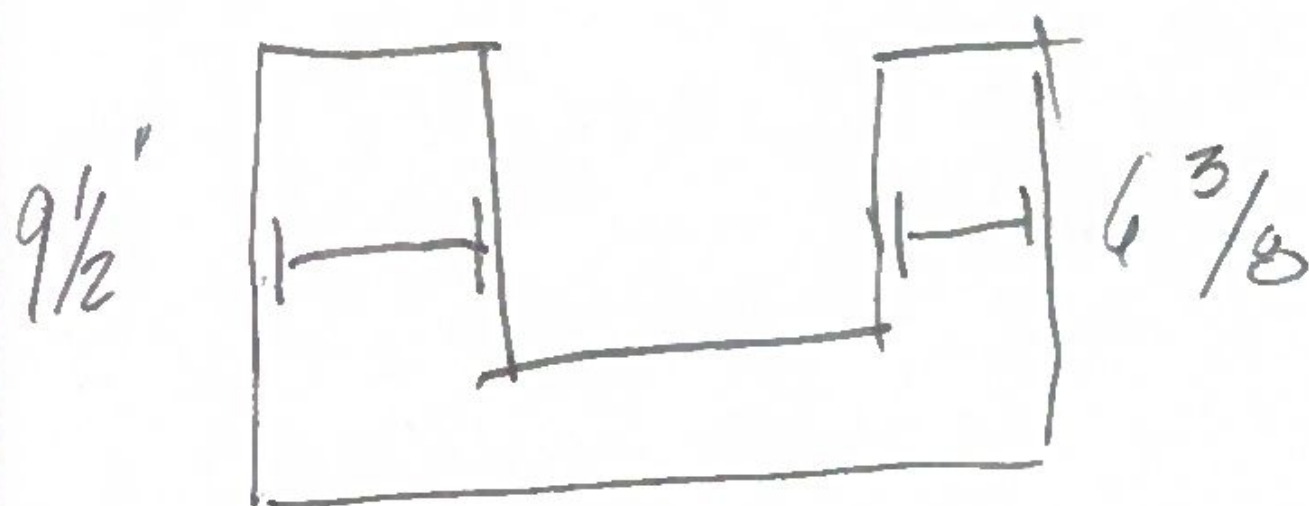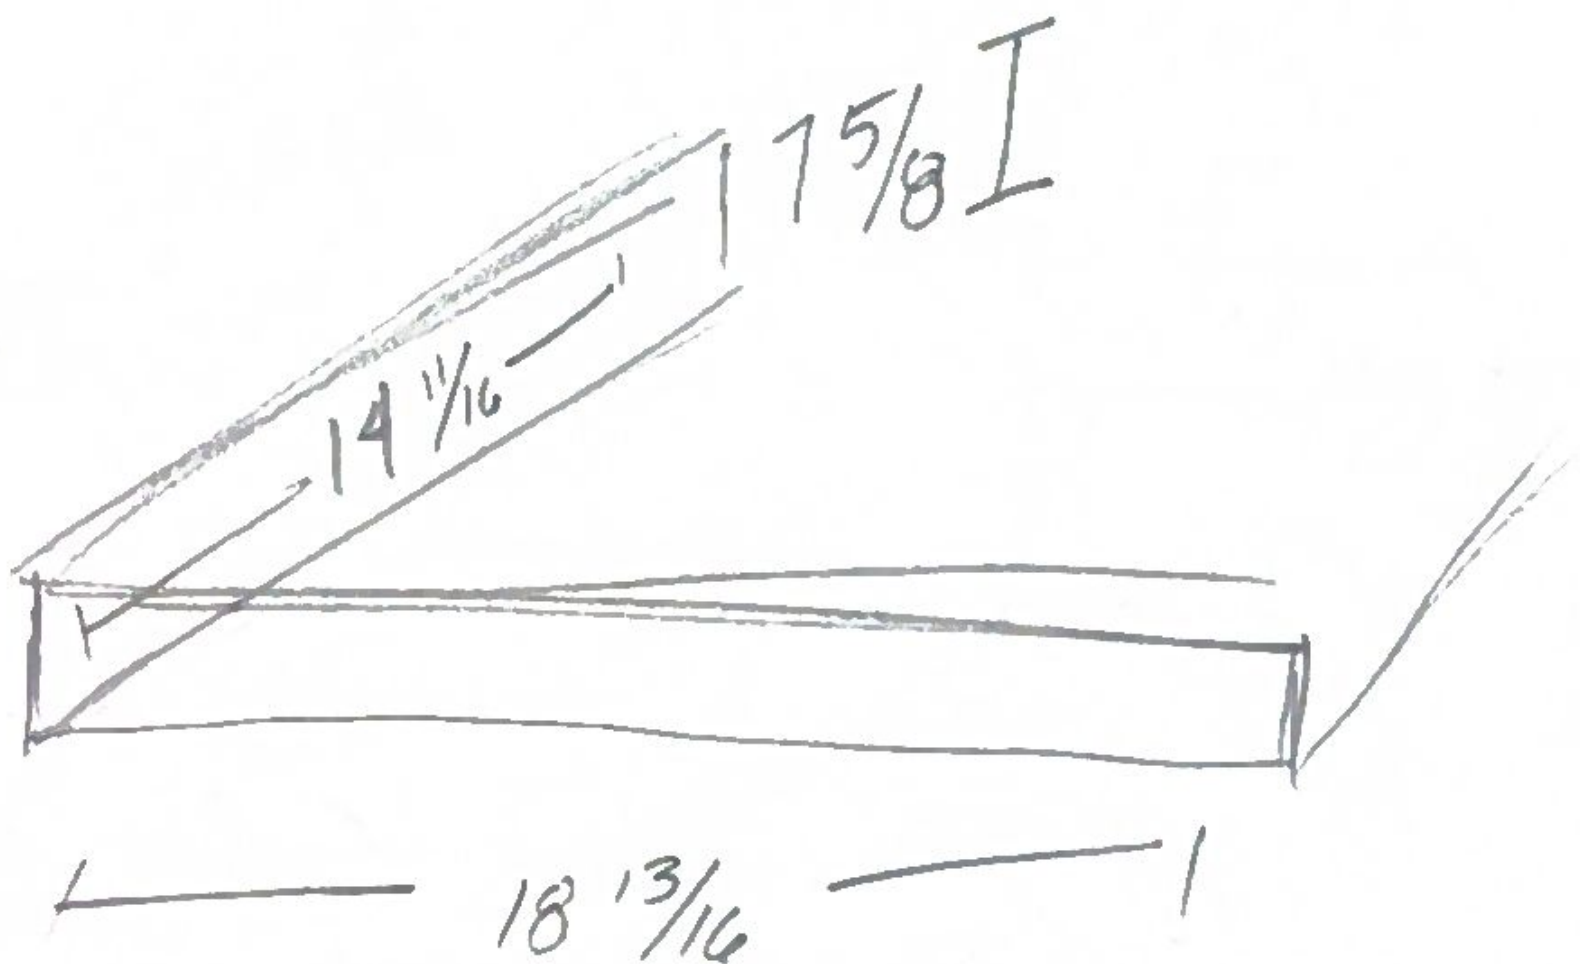

GUEST BATH 7' 14" area
BOTTOM DRAWER —

MIRROR

24.5 = ACTUAL

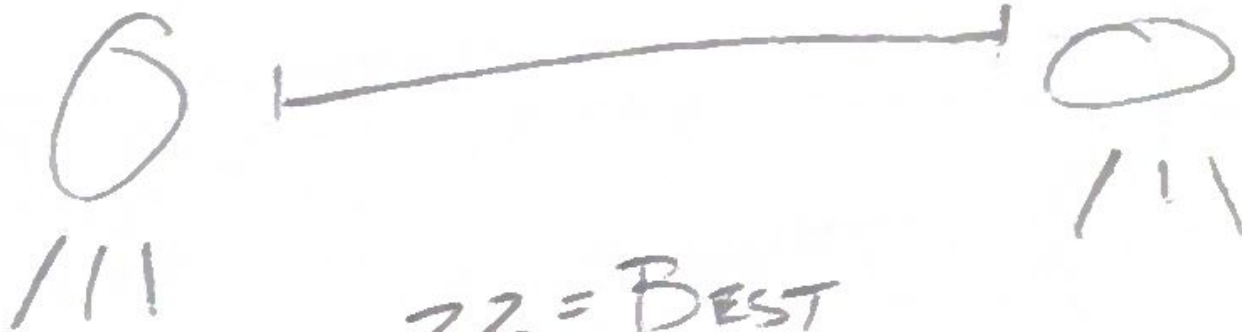

22 = BEST

23 = ACCEPTABLE

32" H = IDEAL

0-2-0

1-1 $\phi \frac{7}{8}$ 1




0-2-0

7"



Office - Circuit Diagram

10-MAY-2024

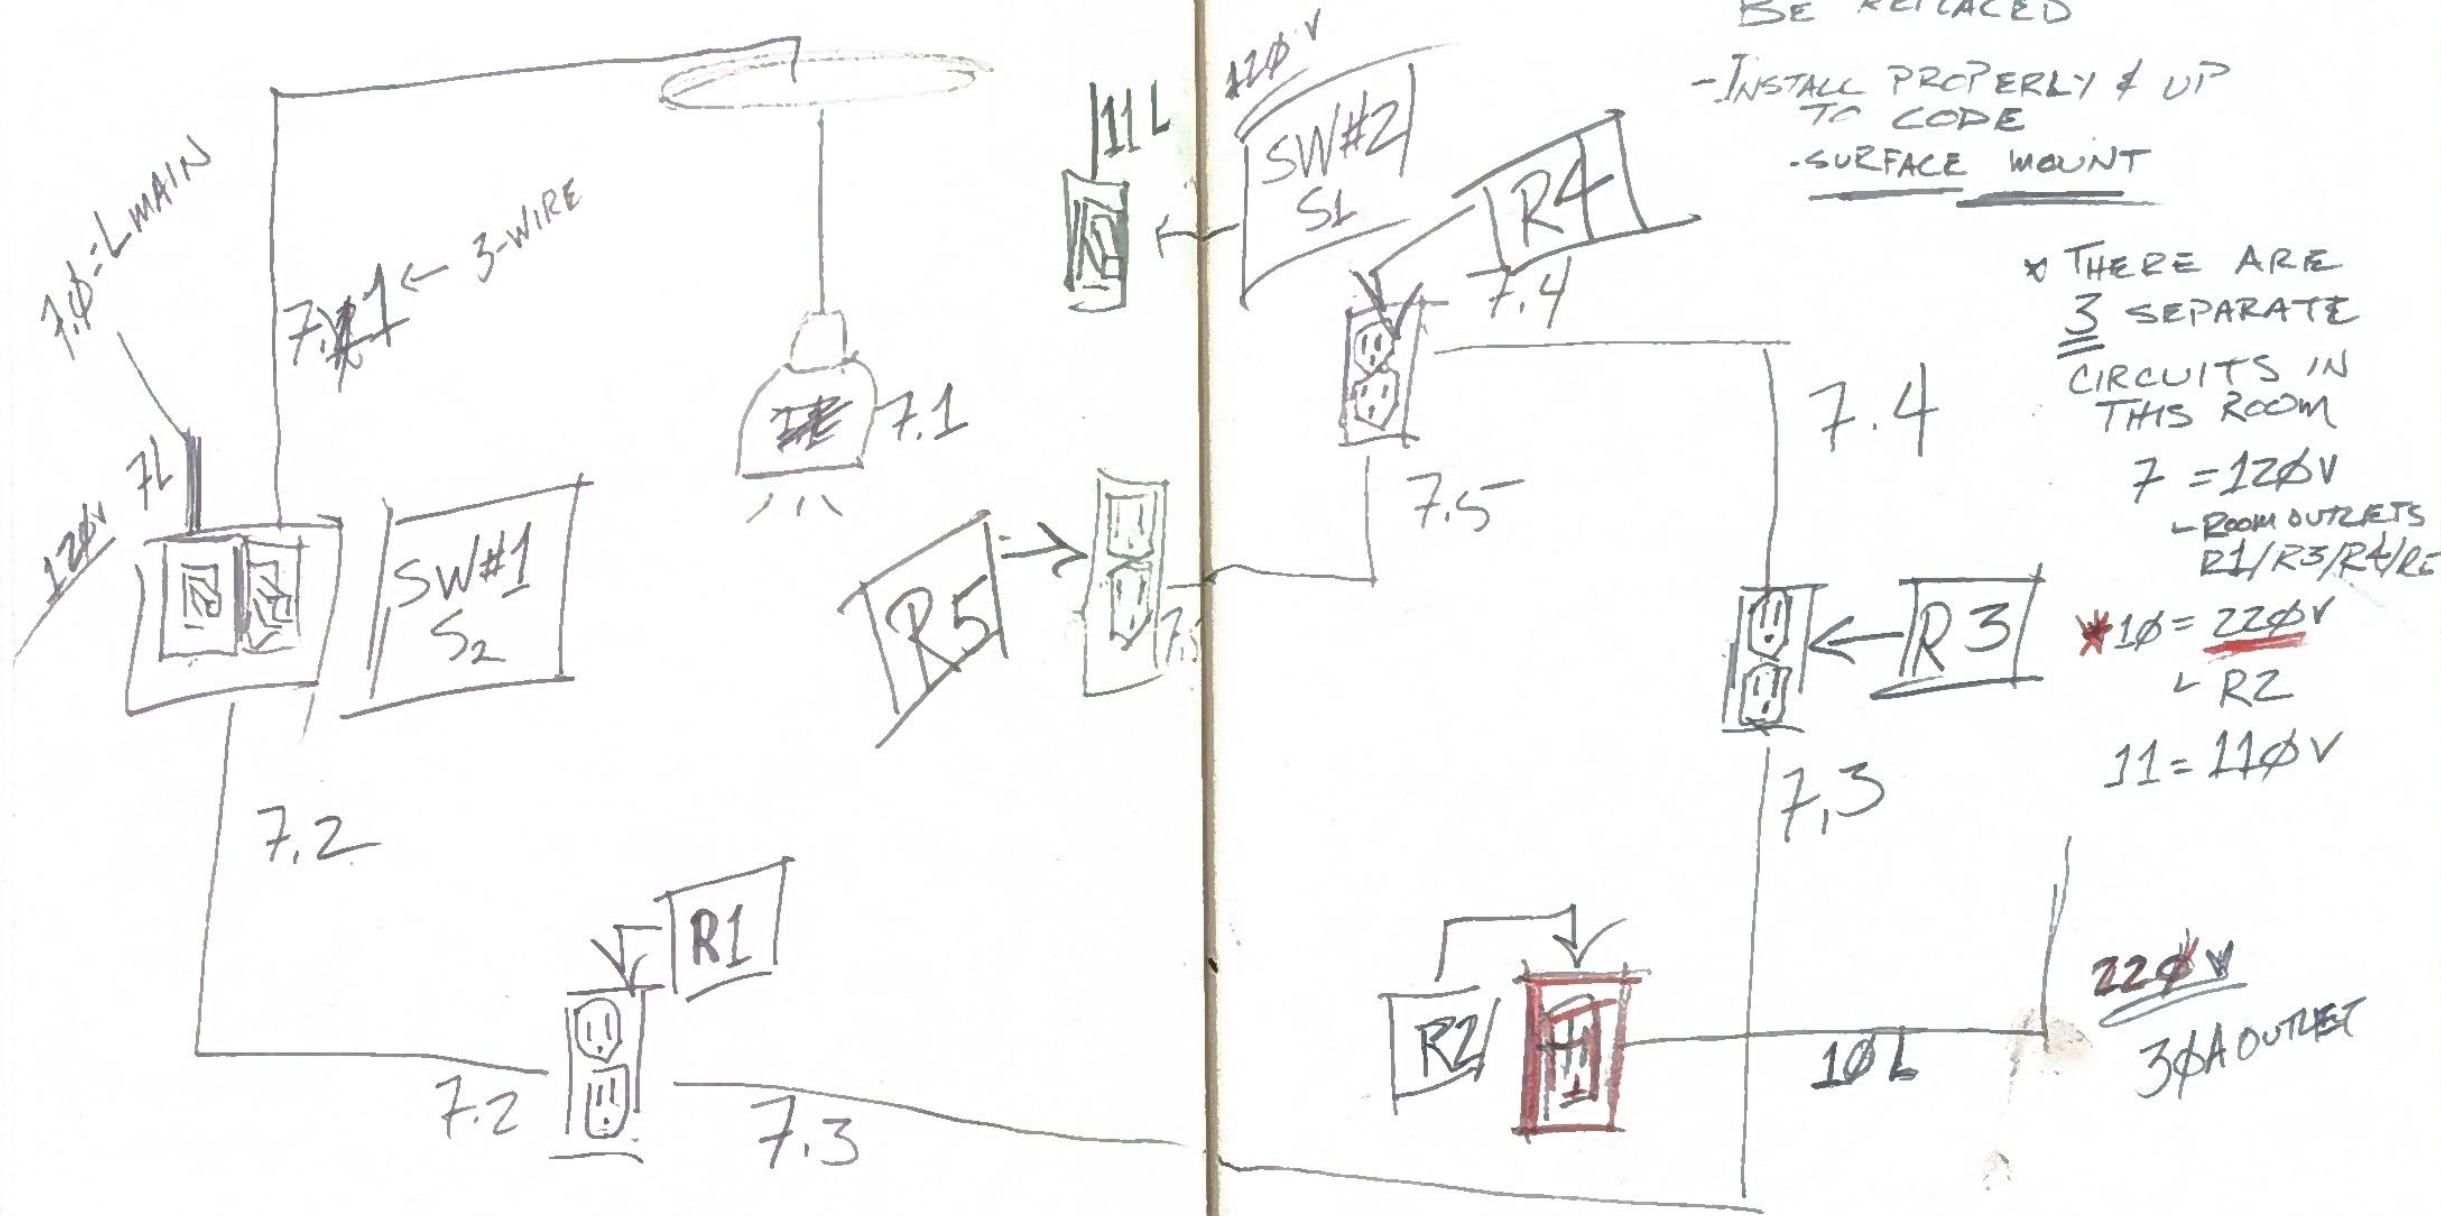

ALL RECEPTICLES NEED TO BE REPLACED

INSTALL PROPERLY & UP TO CODE

SURFACE MOUNT

THERE ARE 3 SEPARATE CIRCUITS IN THIS ROOM

7 = 120V

ROOM OUTLETS R1/R3/R4/R5

*10 = 220V


R2

11 = 110V

220V


30A OUTLET

BARRE STUDIO - CIRCUIT DIAG v1
12-APRIL-2026

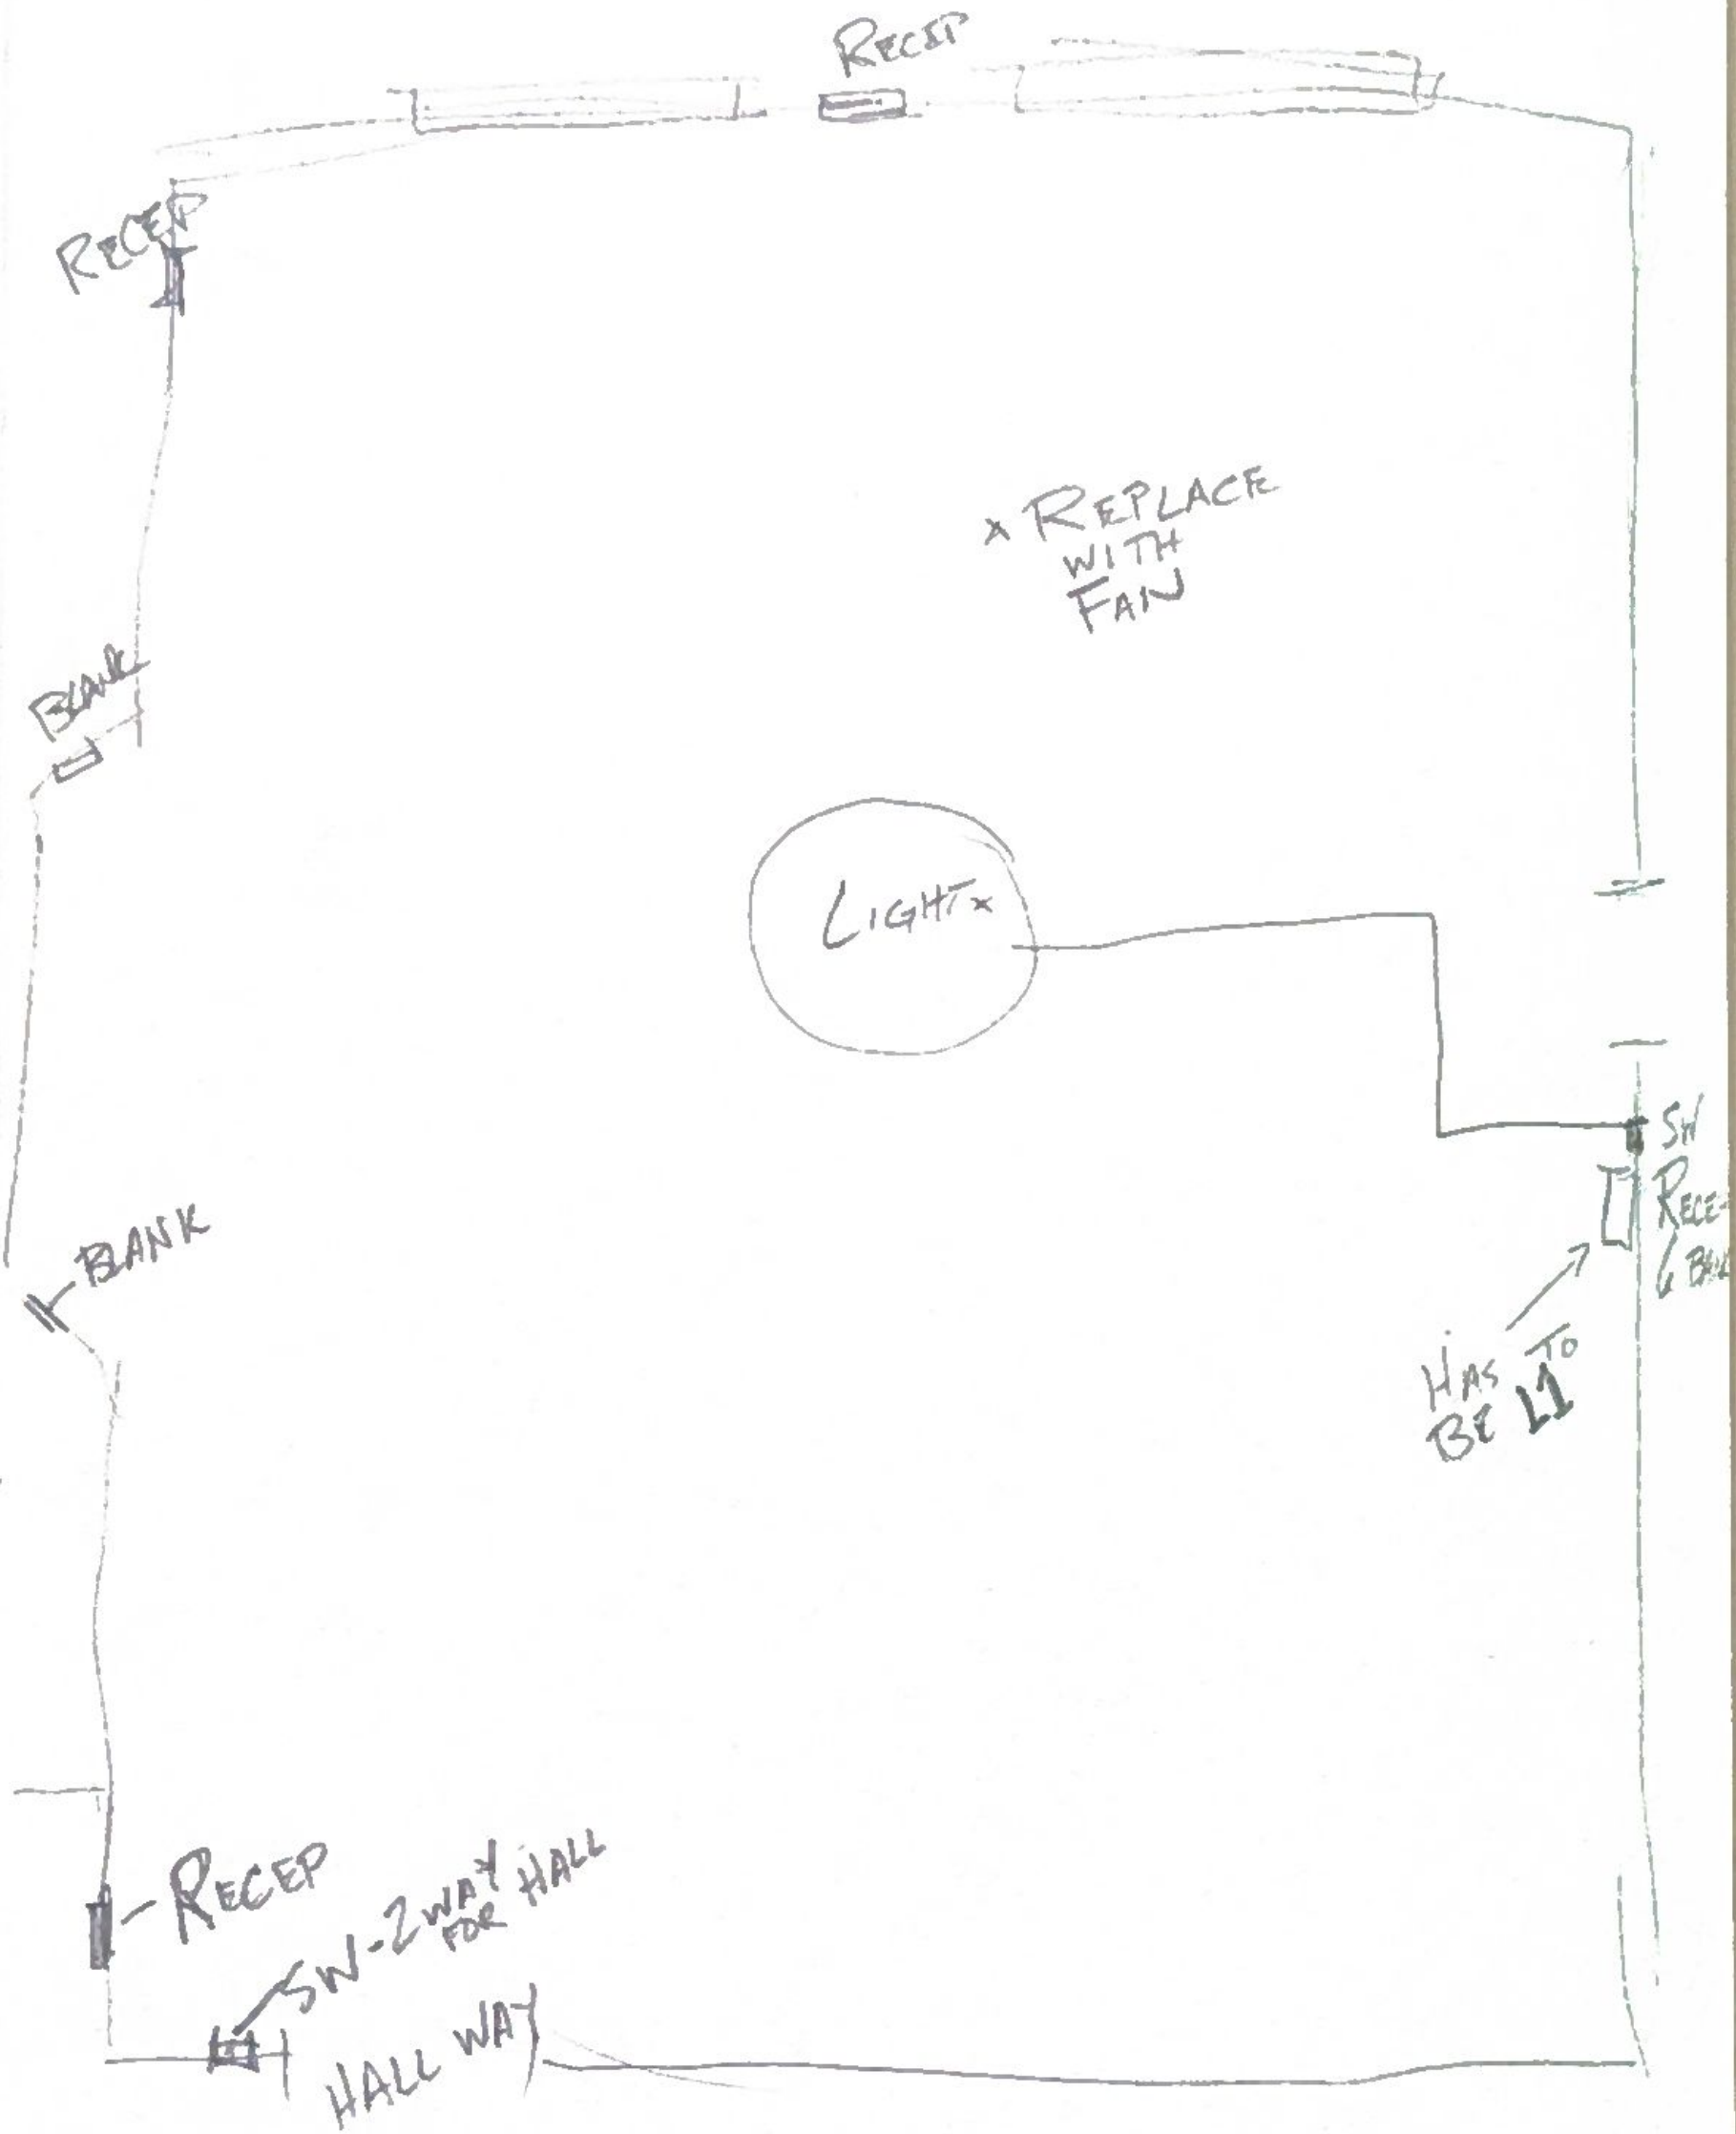

FRONT ROOM + HALLWAY CIRCUIT

BREAKER
11

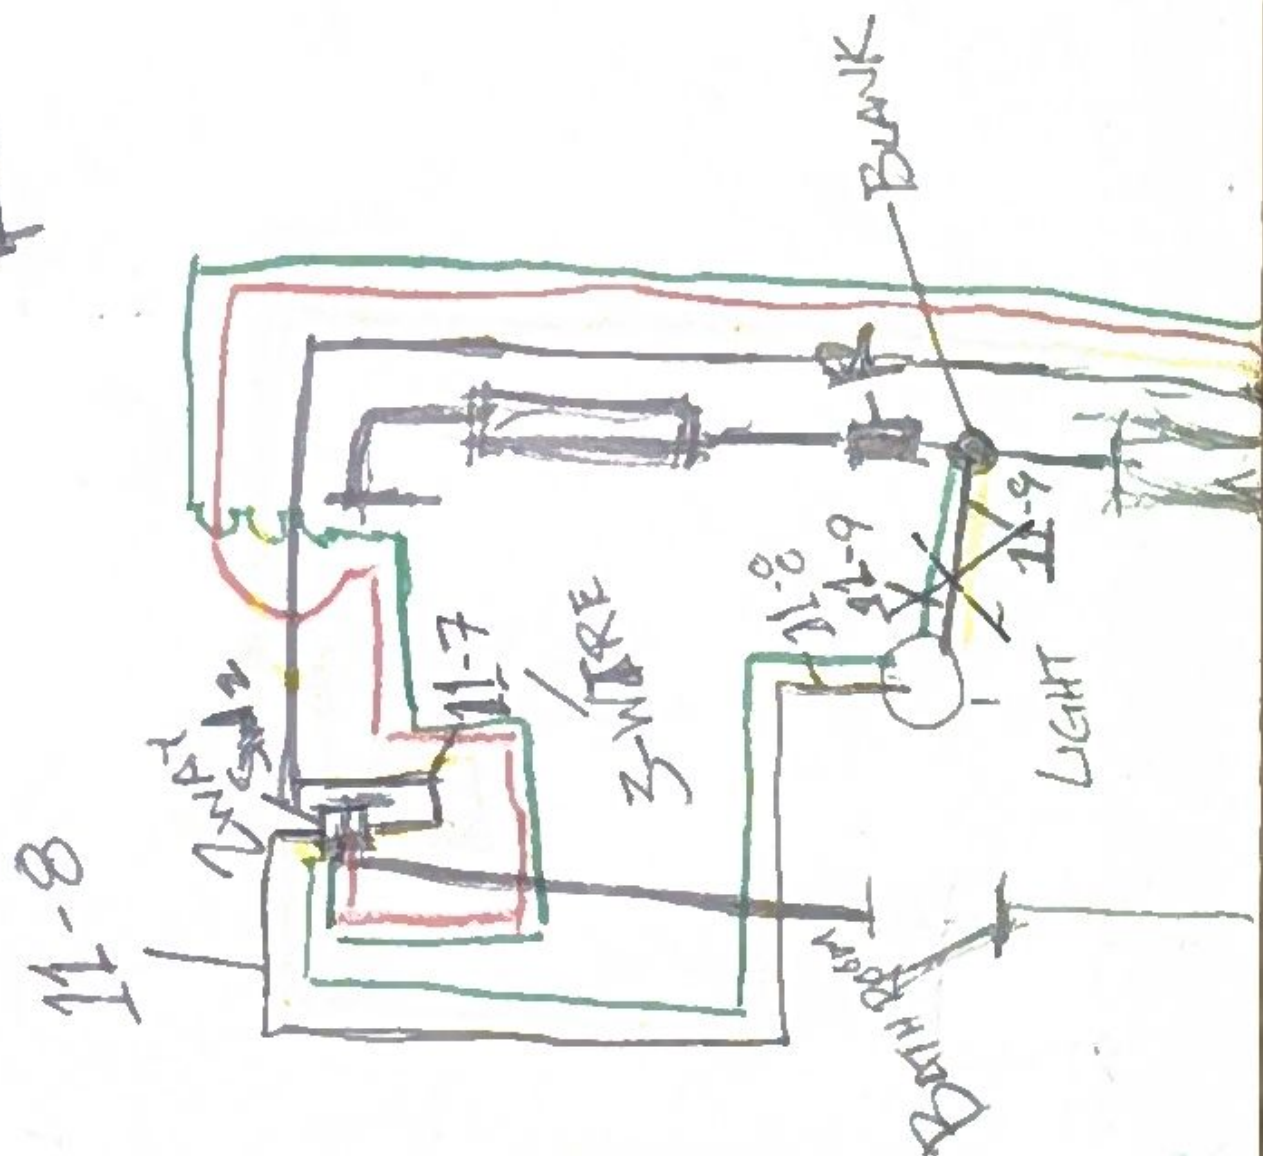

LEGEND

L1 = MAIN LOAD

SW_N = SWITCH NUM

R = RECEPTICAL

NOTES

PRIMARY CIRCUIT VOLTAGE
IS 110V.

FOUND 2x 220V


ALL LEGS ARE LABELED

11 | N 11 = BREAKER

N = LEG NUM


DIAGRAM

[05-APRIL-2026]

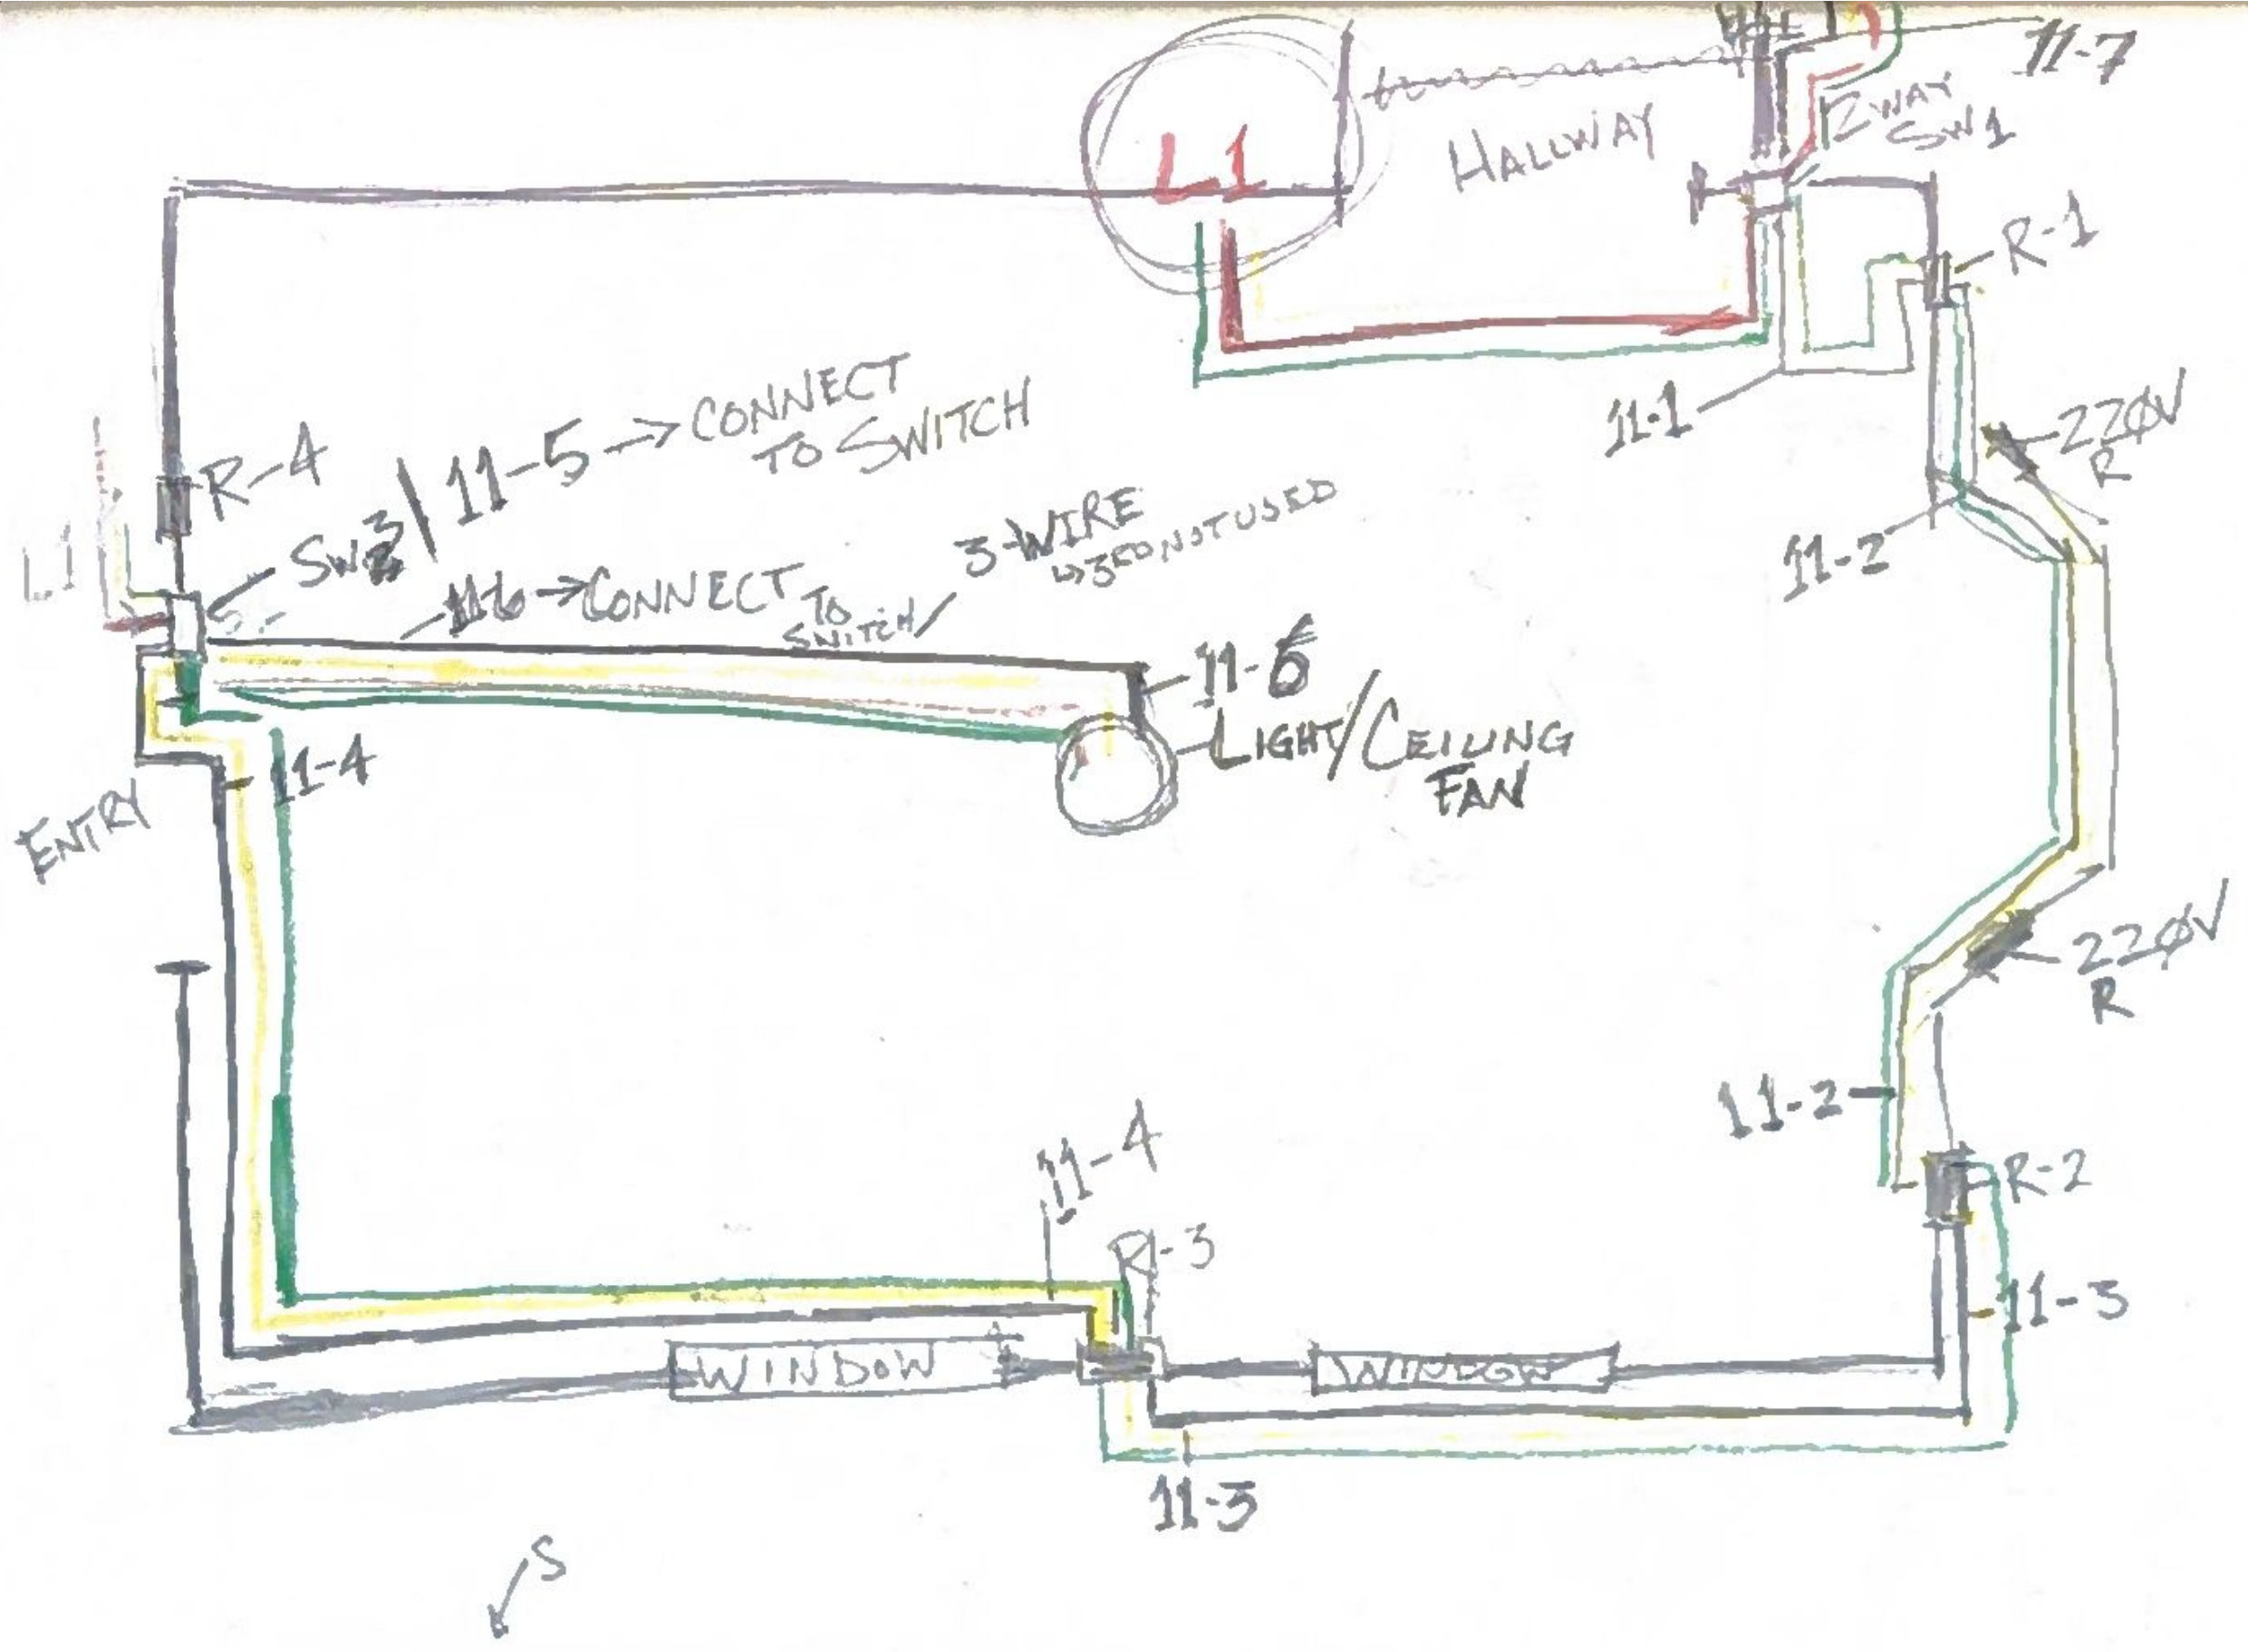

3-Way HALLWAY SWITCH

[17 APRIL 2026]

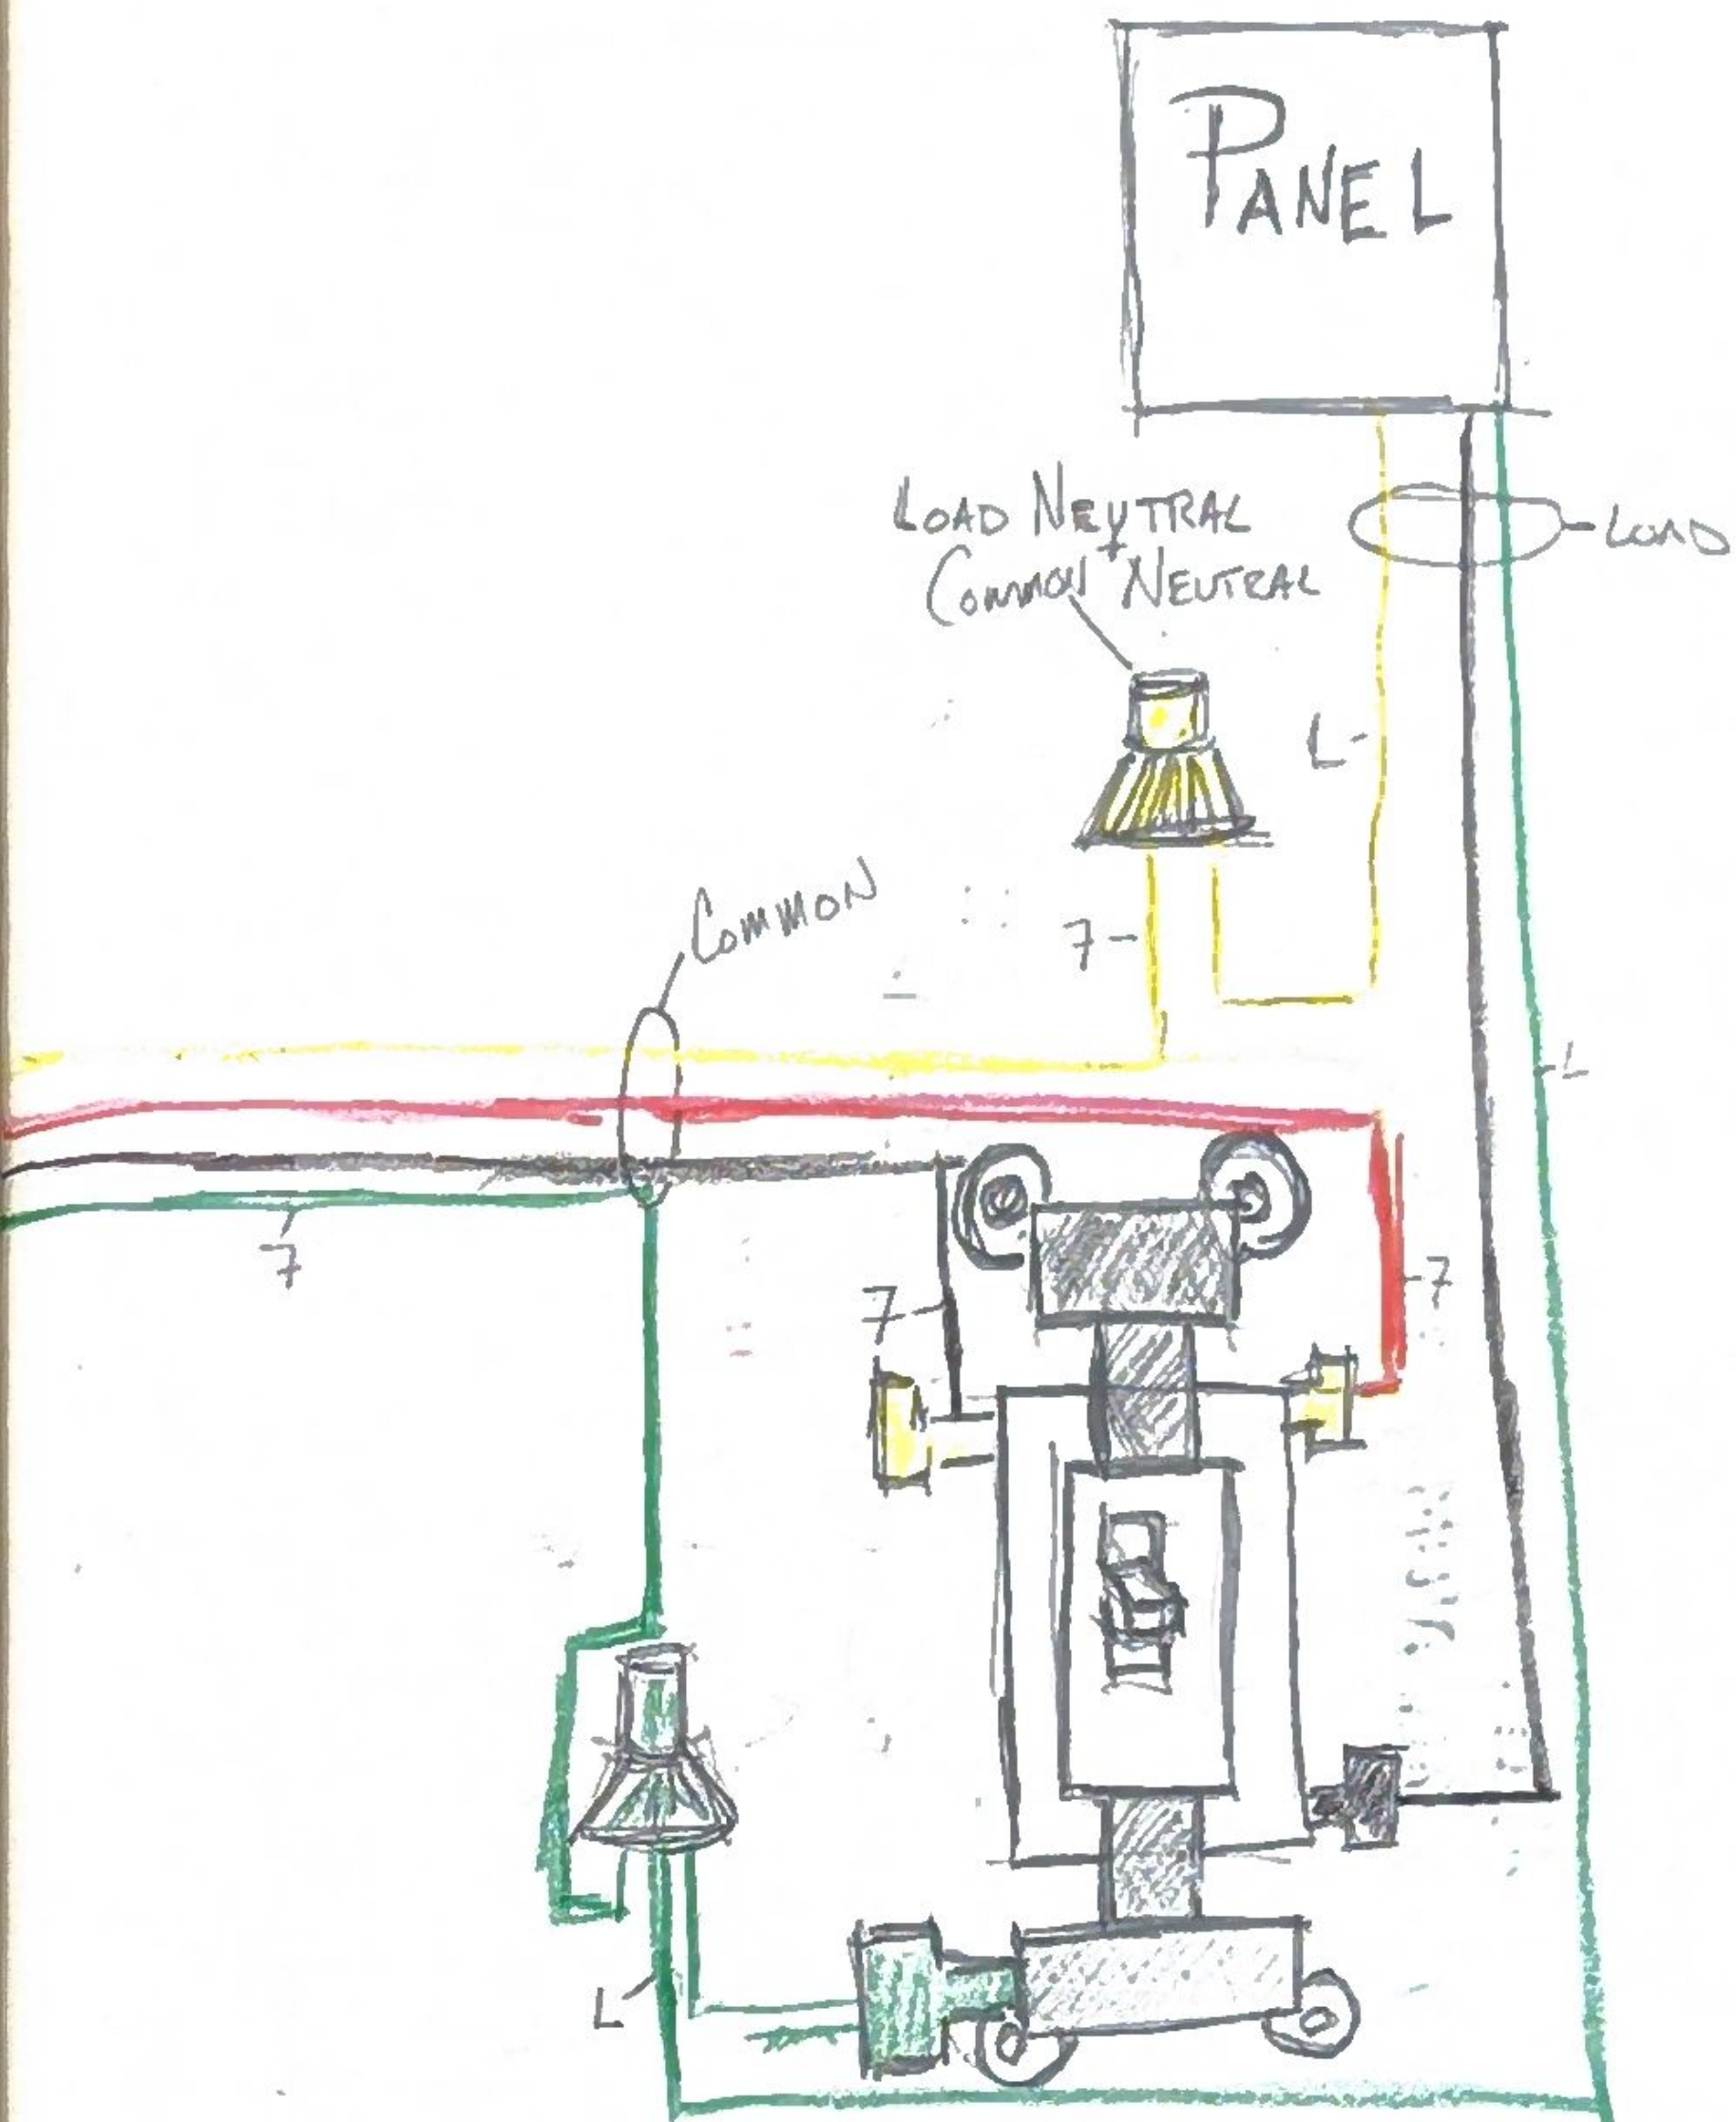

STUDIO DETAIL

LEGEND

A'N' - ANGLE NUM
W'N.N'' - WALL NUM


CEILING FAN NOTES

INSIDE-TO-INSIDE JOIST SPAN $\sim 22\frac{1}{4}"$
INSIDE TONGUE-TO-INSIDE TONGUE SPAN $\sim 22\frac{3}{16}"$

JOIST SPAN CENTER $\sim 11\frac{1}{8}"$

PLANK SPAN CENTER $\sim 11\frac{3}{32}"$

Studio-Room Cooler DETAIL

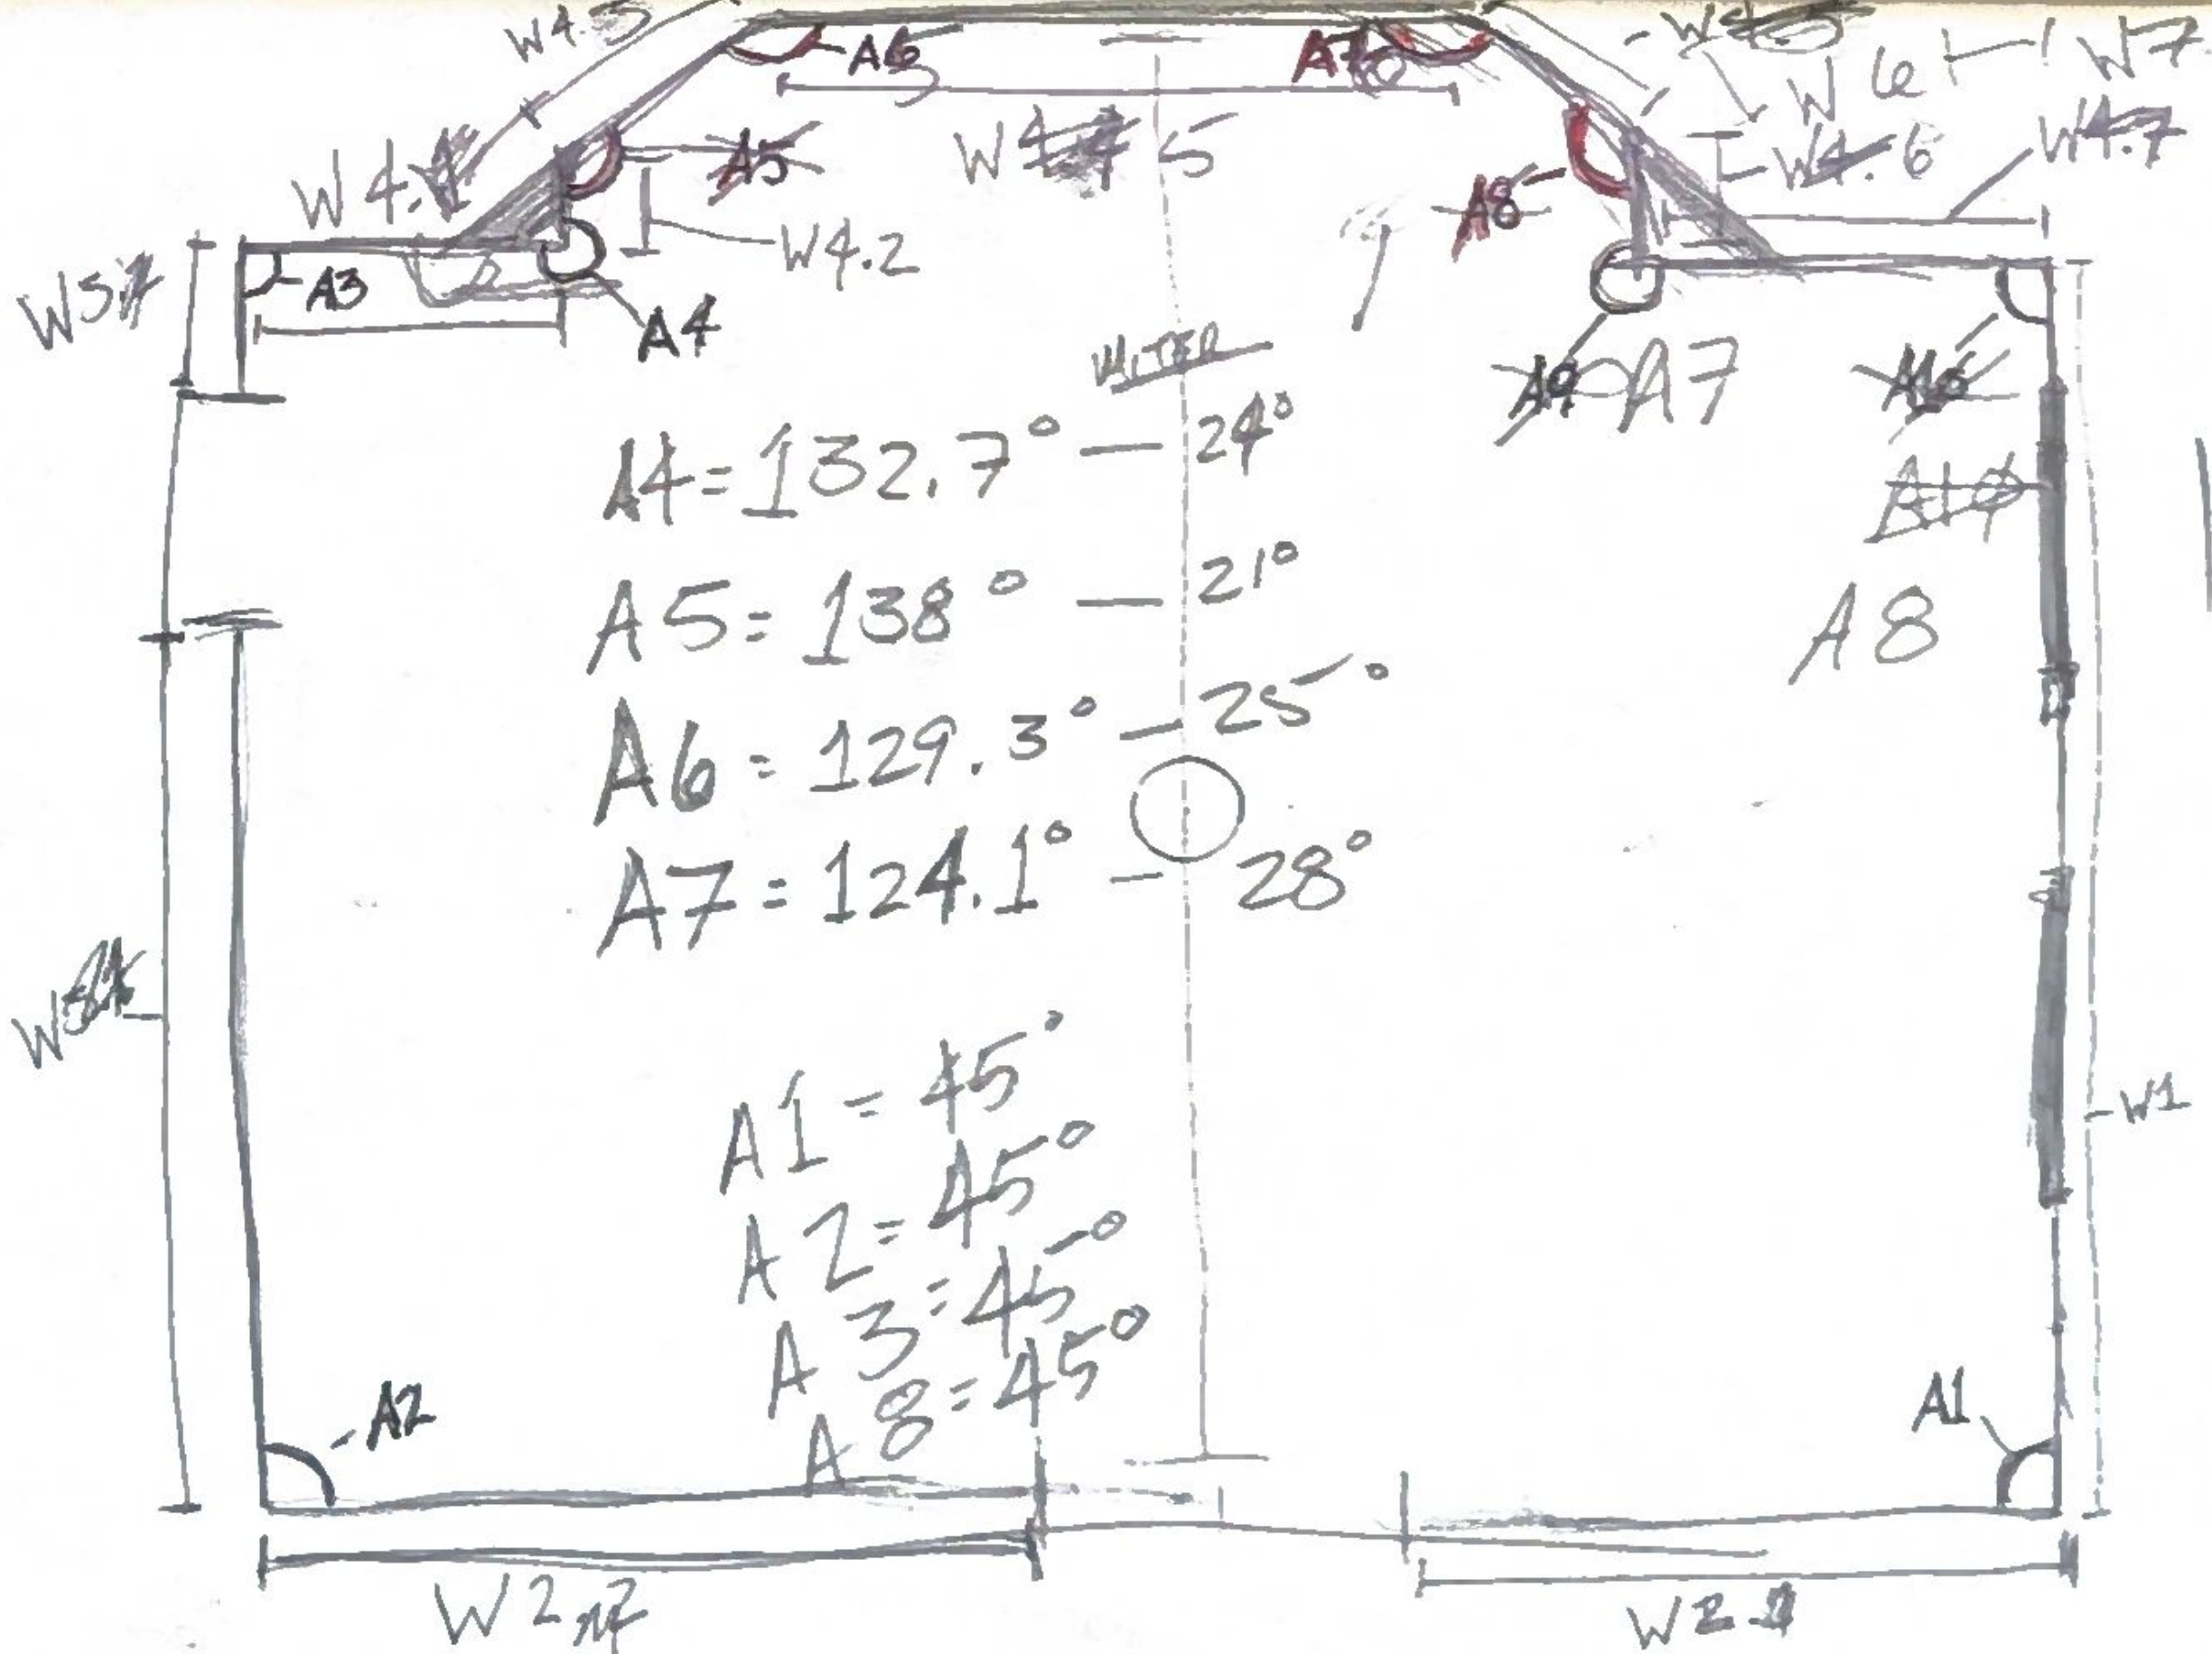

STUDIO DETAIL

[11-MAY-2026]

$$W1 = 183" (15'3") \quad W5 = 47\frac{3}{8}"$$

$$W2 = 181" (15'1") \quad W6 = 49\frac{7}{8}"$$

$$W3 = 32\frac{3}{4}" \quad W7 = 33\frac{7}{16}"$$

$$W4 = 52\frac{1}{16}" \quad W8 = 181" (15'1")$$

$$\text{MIN TOTAL} = \cancel{64'} 64'$$

$$\boxed{74' = 15\% \text{ OVERAGE}}$$

88 =

