

USB, POWER PATHS, CHARGING AND FILTERING

R16 Charge Rate

10K = 110mA


5.0K = 200mA

3.3K = 300mA


2.0K = 500mA

1.2K = 830mA


830mA charge rate is the recommended fastest this PMIC can charge

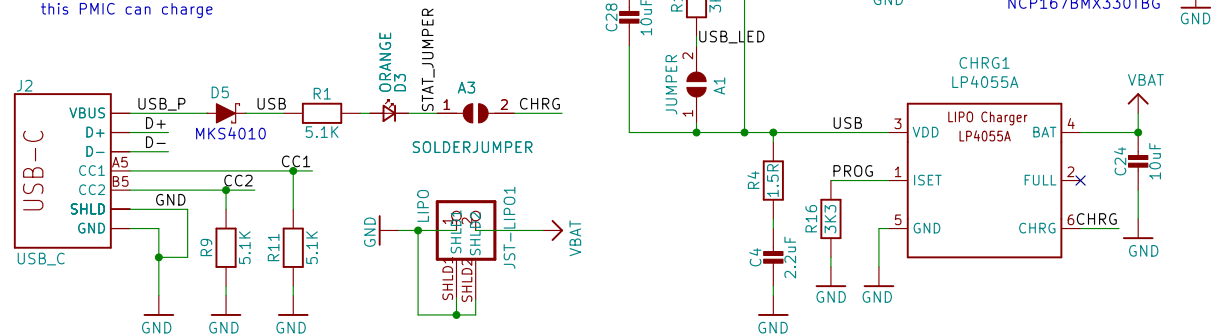


BATTERY FUEL GAUGE

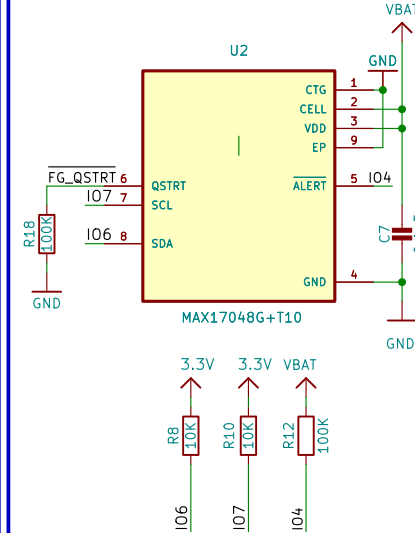


IO EXPANDER

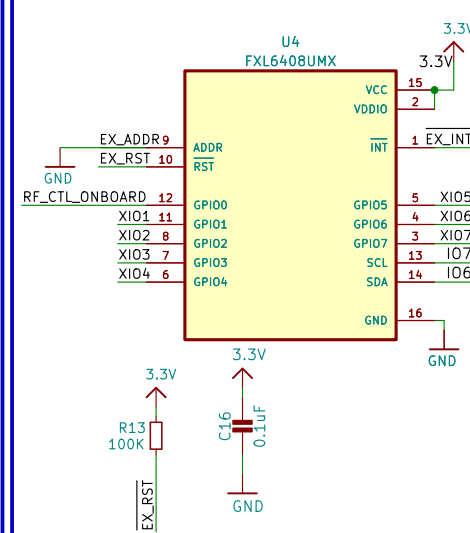



RGB LED

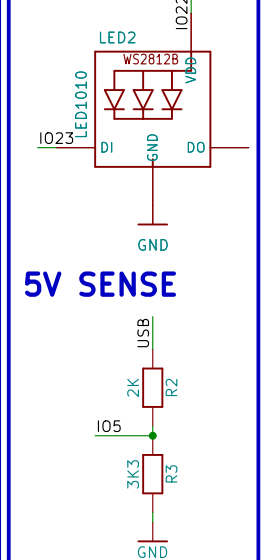

5V SENSE




EXTERNAL FLASH

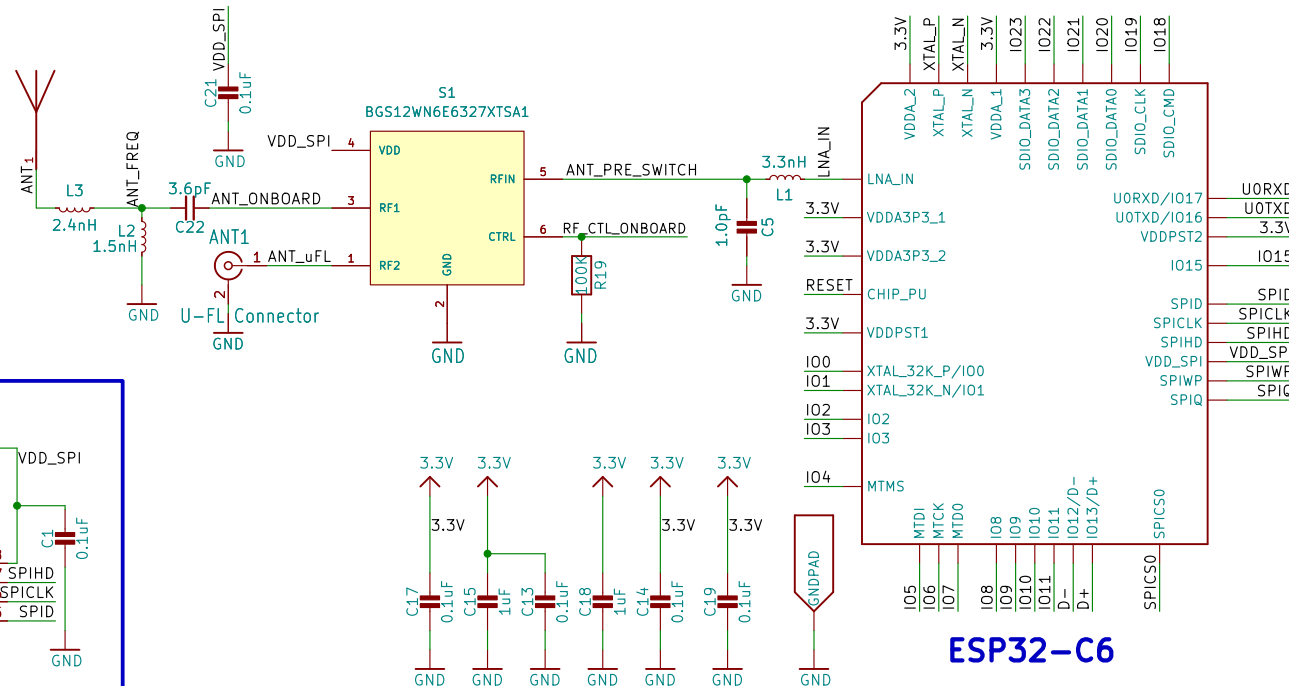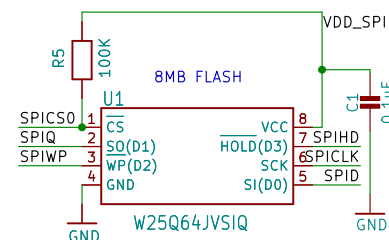


ESP32-C6


BUTTONS

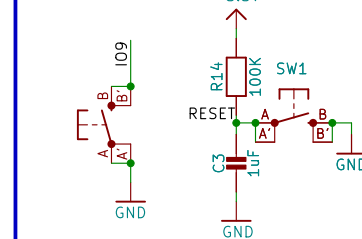

XTAL

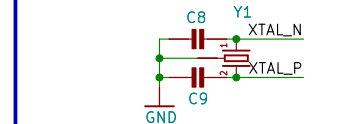

HEADERS

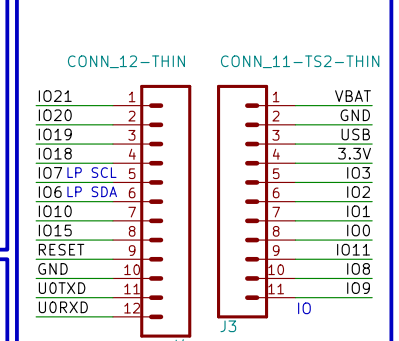

TinyC6D

Unexpected Maker

Sheet: /

File: TinyC6D_P1.kicad_sch

Title: TinyC6D

Size: User Date: 2026-09-11

KiCad E.D.A. 10.0.6

Rev: P1

Id: 1/1