


Non-Driver Resettable Inputs

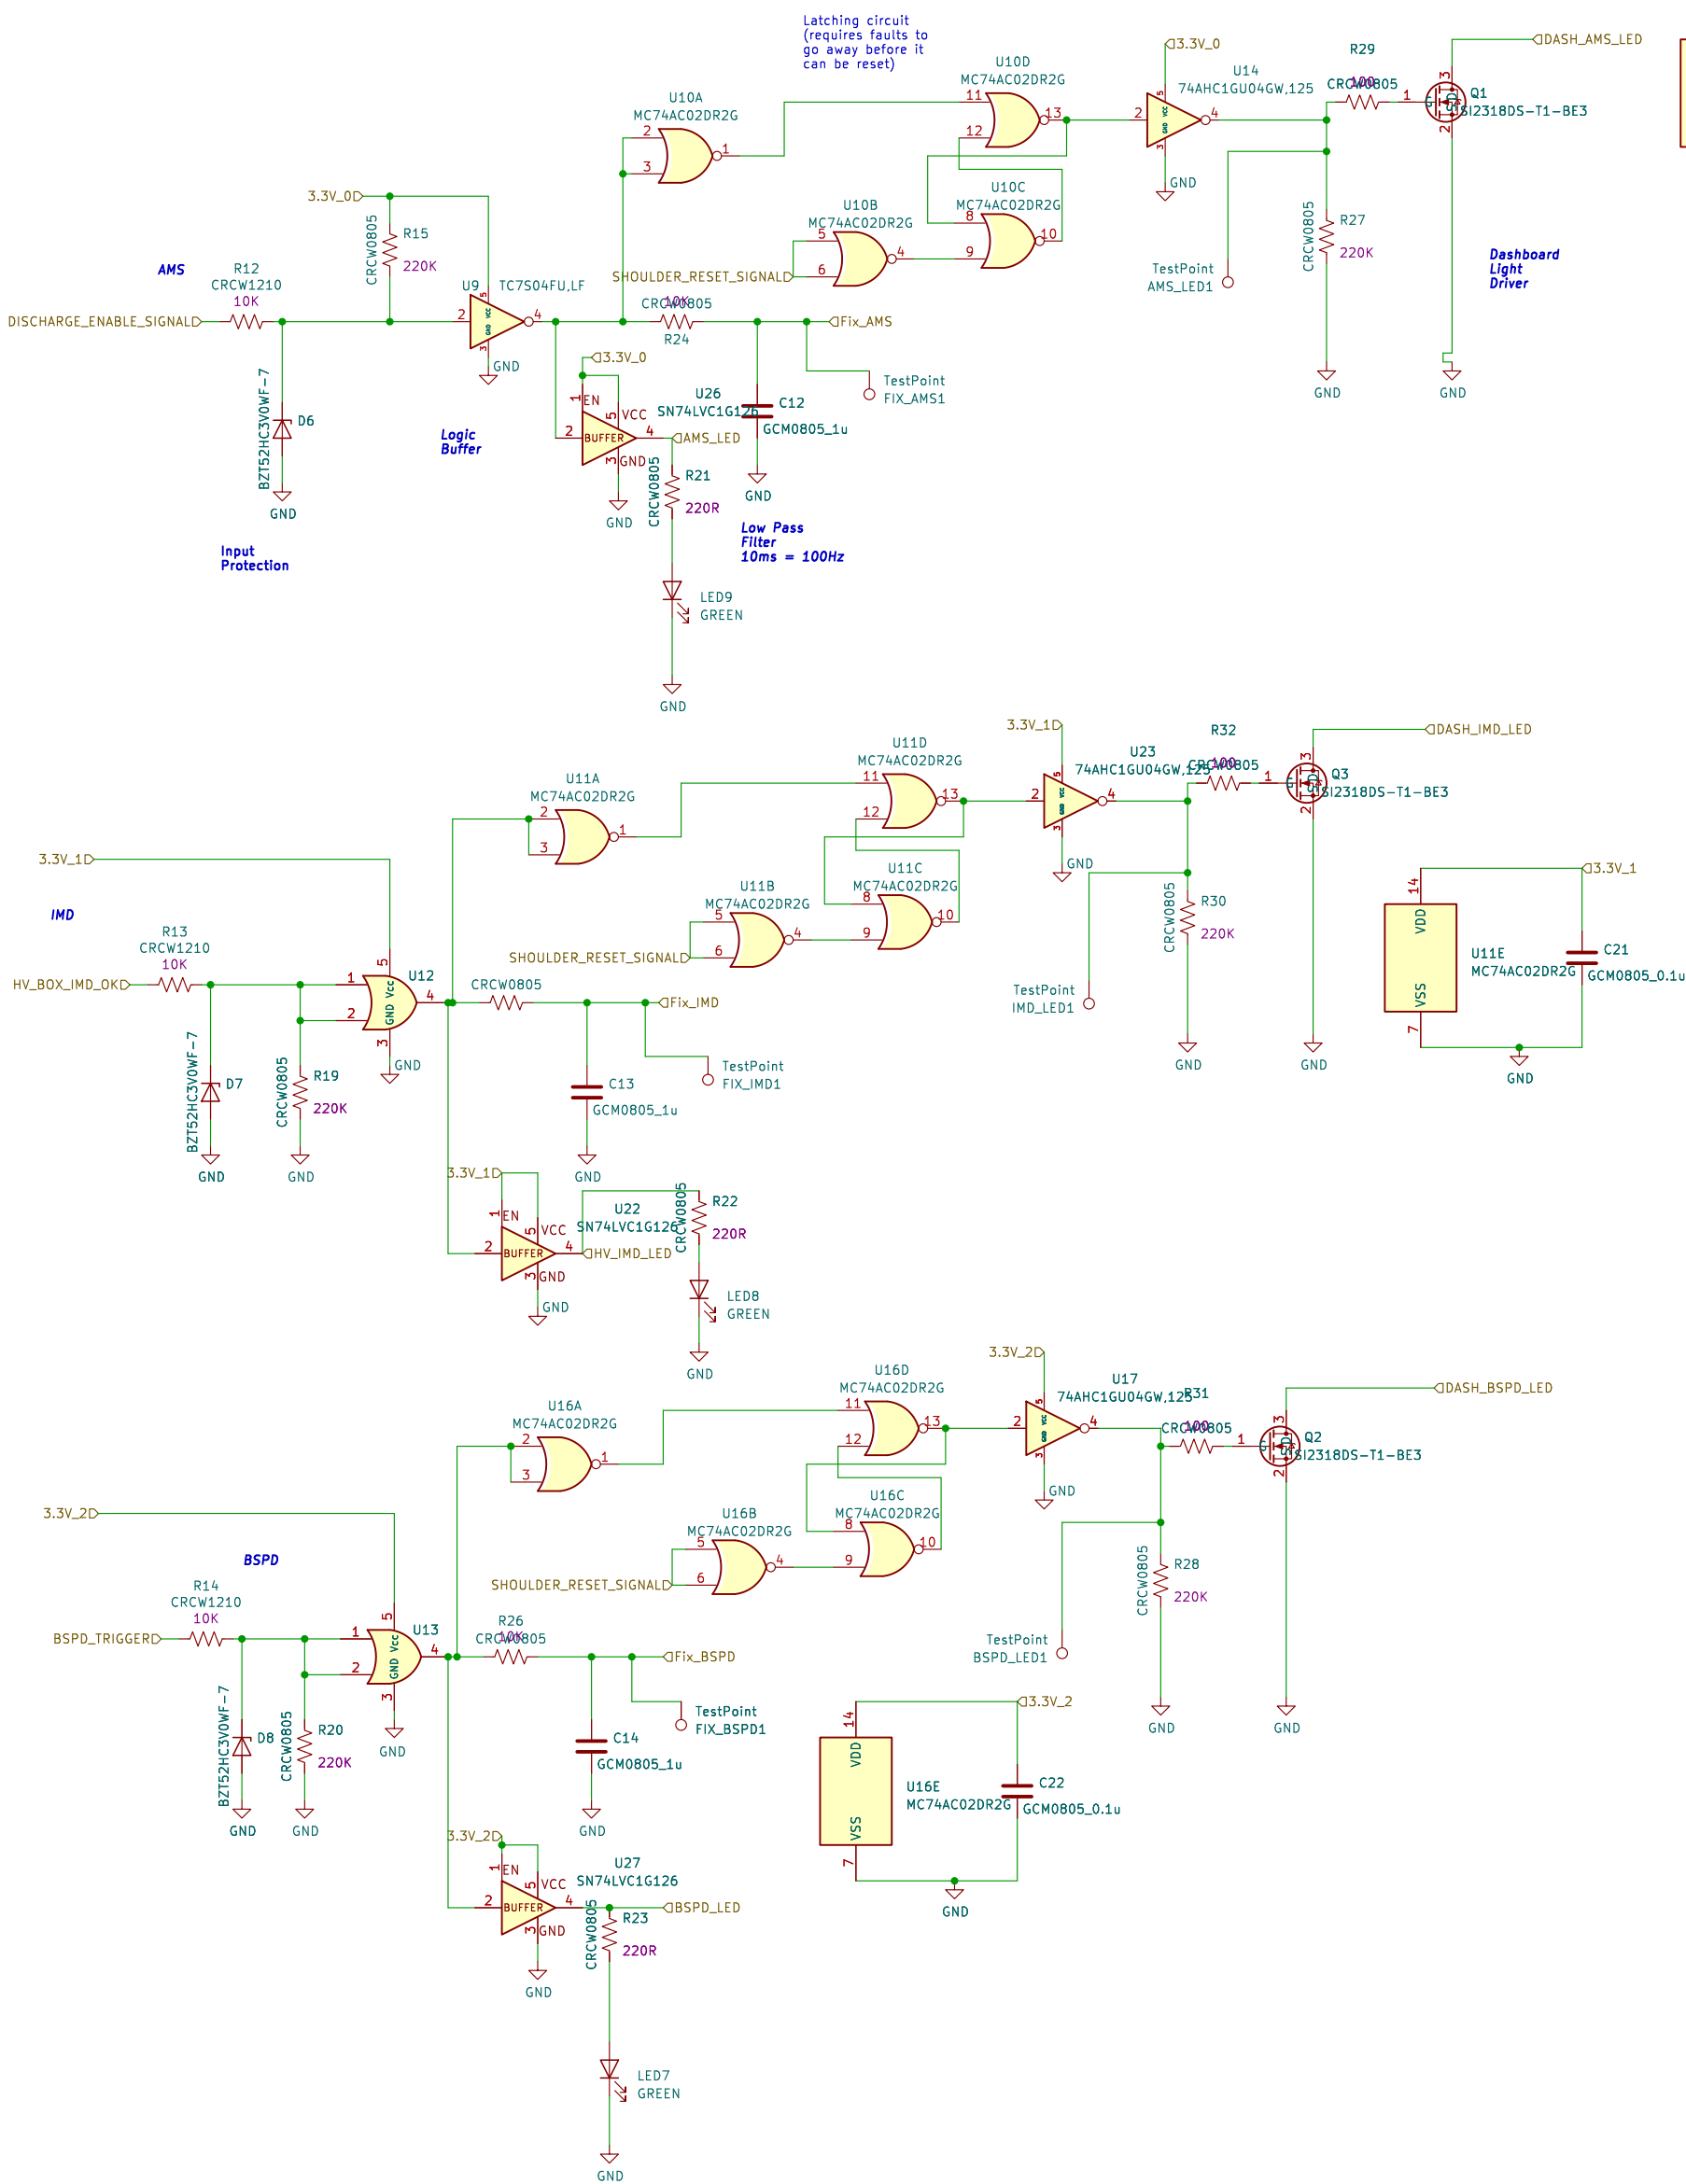

INPUT REQUIREMENTS

Input High: 4.6-60V
Input Low: 0.0-0.8V
25uA @ 4.6V
1mA @ 15V
55mA @ 60V
10ms minimum

-1uA @ 0.0V
-6uA @ 0.8V
10ms minimum

UNUSED LOGIC

